Product data sheet

Specifications





variable speed drive ATV71 -30kW-40HP - 480V - EMC filtergraphic terminal

ATV71HD30N4S337

() Discontinued on: Dec 2, 2020

() To be end-of-service on: Mar 31, 2028

Main

Range Of Product	Altivar 71
Product Or Component Type	Variable speed drive
Product Specific Application	Complex, high-power machines
Component Name	ATV71
Motor Power Kw	30 kW, 3 phase 380480 V
Maximum Horse Power Rating	40 hp, 3 phase 380480 V
Maximum Motor Cable Length	328.08 ft (100 m) shielded cable 656.17 ft (200 m) unshielded cable
Power Supply Voltage	380480 V - 1510 %
Phase	3 phase
Line Current	56 A 480 V 3 phase 30 kW / 40 hp 66 A 380 V 3 phase 30 kW / 40 hp
Emc Filter	Integrated
Assembly Style	With heat sink
Variant	Reinforced version
Apparent Power	43.4 kVA 380 V 3 phase 30 kW / 40 hp
Prospective Line Isc	22 kA 3 phase
Nominal Output Current	52 A 4 kHz 460 V 3 phase 30 kW / 40 hp 66 A 4 kHz 380 V 3 phase 30 kW / 40 hp
Maximum Transient Current	109 A 2 s 3 phase 30 kW / 40 hp 99 A 60 s 3 phase 30 kW / 40 hp
Output Frequency	0.1599 Hz
Nominal Switching Frequency	4 kHz
Switching Frequency	116 kHz adjustable 416 kHz with derating factor
Asynchronous Motor Control Profile	Sensorless flux vector control (SFVC) (voltage or current vector) Flux vector control (FVC) with sensor (current vector) ENA (Energy adaptation) system for unbalanced loads Voltage/frequency ratio (2 or 5 points)
Type Of Polarization	No impedance Modbus

Complementary

Product Destination

Asynchronous motors Synchronous motors

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Power Supply Voltage Limits	323528 V				
Power Supply Frequency	5060 Hz - 55 %				
Power Supply Frequency Limits	47.563 Hz				
Speed Range	1100 asynchronous motor in open-loop mode, without speed feedback 11000 asynchronous motor in closed-loop mode with encoder feedback 150 synchronous motor in open-loop mode, without speed feedback				
Speed Accuracy	+/- 0.01 % of nominal speed in closed-loop mode with encoder feedback 0.2 Tn to Tn +/- 10 % of nominal slip without speed feedback 0.2 Tn to Tn				
Torque Accuracy	+/- 15 % in open-loop mode, without speed feedback +/- 5 % in closed-loop mode with encoder feedback				
Transient Overtorque	170 % +/- 10 % 60 s every 10 minutes 220 % +/- 10 % 2 s				
Braking Torque	<= 150 % with braking or hoist resistor 30 % without braking resistor				
Synchronous Motor Control Profile	Vector control without speed feedback				
Regulation Loop	Adjustable PI regulator				
Motor Slip Compensation	Automatic whatever the load Suppressable Not available in voltage/frequency ratio (2 or 5 points) Adjustable				
Diagnostic	for drive voltage 1 LED (red)				
Output Voltage	<= power supply voltage				
Insulation	Electrical between power and control				
Type Of Cable For Mounting In An Enclosure	With a NEMA Type1 kit 3 UL 508 cable 104 °F (40 °C), copper 75 °C / PVC With an IP21 or an IP31 kit 3 IEC cable 104 °F (40 °C), copper 70 °C / PVC Without mounting kit 1 IEC cable 113 °F (45 °C), copper 70 °C / PVC Without mounting kit 1 IEC cable 113 °F (45 °C), copper 90 °C / XLPE/EPR				
Electrical Connection	Terminal 2.5 mm², AWG 14 Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, Ll1Ll6, PWR) Terminal 50 mm², AWG 1/0 L1/R, L2/S, L3/T, U/T1, V/T2, W/T3, PC/-, PO, PA/+, PA, PB)				
Tightening Torque	5.31 lbf.in (0.6 N.m) Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, Ll1Ll6, PWR) 106.21 lbf.in (12 N.m), 102.2 lb.in L1/R, L2/S, L3/T, U/T1, V/T2, W/T3, PC/-, PO, PA/ +, PA, PB)				
Supply	Internal supply for reference potentiometer (1 to 10 kOhm) 10.5 V DC +/- 5 %, <10 mA overload and short-circuit protection Internal supply 24 V DC 2127 V), <200 mA overload and short-circuit protection				
Analogue Input Number	2				
Analogue Input Type	Al1-/Al1+ bipolar differential voltage +/- 10 V DC 24 V max 11 bits + sign Al2 software-configurable current 020 mA 242 Ohm 11 bits Al2 software-configurable voltage 010 V DC 24 V max 30000 Ohm 11 bits				
Input Sampling Time	2 ms +/- 0.5 ms Al1-/Al1+) - analog 2 ms +/- 0.5 ms Al2) - analog 2 ms +/- 0.5 ms Ll1Ll5) - discrete 2 ms +/- 0.5 ms Ll6)if configured as logic input - discrete				
Response Time	<= 100 ms in STO (Safe Torque Off) AO1 2 ms +/- 0.5 ms analog R1A, R1B, R1C 7 ms +/- 0.5 ms discrete R2A, R2B 7 ms +/- 0.5 ms discrete				
Absolute Accuracy Precision	+/- 0.6 % Al1-/Al1+) for a temperature variation 60 °C +/- 0.6 % Al2) for a temperature variation 60 °C +/- 1 % AO1) for a temperature variation 60 °C				
Linearity Error	+/- 0.15 % of maximum value Al1-/Al1+, Al2) +/- 0.2 % AO1)				
Analogue Output Number	1				

Analogue Output Type	AO1 software-configurable logic output 10 V 20 mA			
	AO1 software-configurable current 020 mA 500 Ohm 10 bits			
	AO1 software-configurable voltage 010 V DC 470 Ohm 10 bits			
Discrete Output Number	2			
Discrete Output Type	Configurable relay logic R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic R2A, R2B) NO - 100000 cycles			
Minimum Switching Current	3 mA 24 V DC configurable relay logic			
Maximum Switching Current	R1, R2 2 A 250 V AC inductive, cos phi = 0.4			
	R1, R2 2 A 30 V DC inductive, cos phi = 0.4			
	R1, R2 5 A 250 V AC resistive, cos phi = 1 R1, R2 5 A 30 V DC resistive, cos phi = 1			
Discrete Input Number	7			
Discrete Input Type	LI1LI5 programmable 24 V DC level 1 PLC 3500 Ohm			
	LI6 switch-configurable 24 V DC level 1 PLC 3500 Ohm			
	LI6 switch-configurable PTC probe 06 1500 Ohm			
	PWR safety input 24 V DC 1500 Ohm ISO 13849-1 level d			
Discrete Input Logic	Negative logic (sink) LI1LI5), > 16 V, < 10 V			
	Positive logic (source) LI1LI5), < 5 V, > 11 V			
	Negative logic (sink) LI6)if configured as logic input, > 16 V, < 10 V			
	Positive logic (source) Ll6)if configured as logic input, < 5 V, > 11 V			
Acceleration And Deceleration	Linear adjustable separately from 0.01 to 9000 s			
Ramps	Automatic adaptation of ramp if braking capacity exceeded, by using resistor			
	S, U or customized			
Braking To Standstill	By DC injection			
Protection Type	Against exceeding limit speed drive			
	Against input phase loss drive			
	Break on the control circuit drive			
	Input phase breaks drive			
	Line supply overvoltage drive Line supply undervoltage drive			
	Overcurrent between output phases and earth drive			
	Overheating protection drive			
	Overvoltages on the DC bus drive			
	Short-circuit between motor phases drive			
	Thermal protection drive			
	Motor phase break motor Power removal motor			
	Thermal protection motor			
Insulation Resistance	> 1 mOhm 500 V DC for 1 minute to earth			
Frequency Resolution				
Frequency Resolution	Analog input 0.024/50 Hz Display unit 0.1 Hz			
Communication Port Protocol	CANopen			
	Modbus			
Connector Type	1 RJ45 on front face)Modbus			
	1 RJ45 on terminal)Modbus			
	Male SUB-D 9 on RJ45CANopen			
Physical Interface	2-wire RS 485 Modbus			
Transmission Frame	RTU Modbus			
Transmission Rate	4800 bps, 9600 bps, 19200 bps, 38.4 Kbps Modbus on terminal			
	9600 bps, 19200 bps Modbus on front face 20 kbps, 50 kbps, 125 kbps, 250 kbps, 500 kbps, 1 Mbps CANopen			
Data Format	8 bits, 1 stop, even parity Modbus on front face 8 bits, odd even or no configurable parity Modbus on terminal			
Number Of Addresses 1127 CANopen				
Mathad Of Assess	1247 Modbus			
Method Of Access	Slave CANopen			
Marking	CE			
Operating Position	Vertical +/- 10 degree			

Height	21.65 in (550 mm)				
Depth	10.47 in (266 mm)				
Width	9.45 in (240 mm)				
Net Weight	81.57 lb(US) (37 kg)				
Option Card	Communication card CC-Link				
	Controller inside programmable card				
	Communication card DeviceNet				
	Communication card EtherNet/IP				
	Communication card Fipio				
	I/O extension card				
	Communication card Interbus-S				
	Interface card for encoder				
	Communication card Modbus Plus				
	Communication card Modbus TCP				
	Communication card Modbus/Uni-Telway				
	Overhead crane card				
	Communication card Profibus DP				
	Communication card Profibus DP V1				

Environment

Noise Level	64 dB 86/188/EEC				
Dielectric Strength	 3535 V DC between earth and power terminals 5092 V DC between control and power terminals 1.2/50 μs - 8/20 μs surge immunity test level 3 IEC 61000-4-5 Conducted radio-frequency immunity test level 3 IEC 61000-4-6 Electrical fast transient/burst immunity test level 4 IEC 61000-4-4 Electrostatic discharge immunity test level 3 IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 IEC 61000-4-3 Voltage dips and interruptions immunity test IEC 61000-4-11 				
Electromagnetic Compatibility					
Standards	EN 61800-3 environments 1 category C3 EN 55011 class A group 2 EN 61800-3 environments 2 category C3 IEC 60721-3-3 class 3C2 EN/IEC 61800-5-1 UL Type 1 EN/IEC 61800-3				
Product Certifications	C-tick GOST CSA NOM 117 UL				
Pollution Degree	2 EN/IEC 61800-5-1 3 UL 840				
p Degree Of Protection	IP20 on upper part without blanking plate on cover EN/IEC 60529 IP20 on upper part without blanking plate on cover EN/IEC 61800-5-1 IP21 EN/IEC 60529 IP21 EN/IEC 61800-5-1 IP41 on upper part EN/IEC 60529 IP41 on upper part EN/IEC 61800-5-1 IP54 on lower part EN/IEC 61800-5-1 IP54 on lower part EN/IEC 61800-5-1				
Vibration Resistance	1 gn 13200 Hz)EN/IEC 60068-2-6 1.5 mm peak to peak 313 Hz)EN/IEC 60068-2-6				
Shock Resistance	15 gn 11 ms EN/IEC 60068-2-27				
Relative Humidity	595 % without condensation IEC 60068-2-3 595 % without dripping water IEC 60068-2-3				
Ambient Air Temperature For Operation	14122 °F (-1050 °C) without derating)				
Ambient Air Temperature For Storage	-13158 °F (-2570 °C)				
Operating Altitude	<= 3280.84 ft (1000 m) without derating 3280.849842.52 ft (10003000 m) with current derating 1 % per 100 m				

Ordering and shipping details

Category	22131-ATV71 - 7.5 THRU 50HP			
Discount Schedule	CP4C			
Gtin	3389118068711			
Returnability	No			
Country Of Origin	FR			

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	16.93 in (43.0 cm)
Package 1 Width	23.62 in (60.0 cm)
Package 1 Length	31.50 in (80.0 cm)
Package 1 Weight	74.96 lb(US) (34.0 kg)

Contractual warranty

Warranty

18 months

Sustainability Screen

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

Well-being performance

Mercury Free

Rohs Exemption Information Yes


Certifications & Standards

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
	EU RoHS Declaration		
China Rohs Regulation	China RoHS declaration		
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.		
Circularity Profile	End of Life Information		
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov		

Dimensions Drawings

UL Type 1/IP 20 Drives

Dimensions without Option Card




Dimensions in mm

а	b	с	G	Н	К	Ø
240	550	266	206	531.5	11	6

Dimensions in in.

а	b	с	G	Н	К	Ø
9.44	21.65	10.47	8.11	20.93	0.45	0.23

Dimensions with 1 Option Card (1)



Dimensions in mm


а	c1	G	Н	К	Ø
240	289	206	531.5	11	6

Dimensions in in

а	c1	G	Н	К	Ø		
9.44	11.38	8.11	20.93	0.45	0.23		

(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card.

Dimensions with 2 Option Cards (1)



Dimensions in mm

а	c2	G	Н	К	Ø
240	312	206	531.5	11	6

Dimensions in in.

а	c2	G	Н	К	Ø
9.44	12.28	8.11	20.93	0.45	0.23

(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card.

Product data sheet

ATV71HD30N4S337

Mounting and Clearance


Mounting Recommendations

Depending on the conditions in which the drive is to be used, its installation will require certain precautions and the use of appropriate accessories.


Install the unit vertically:

- Avoid placing it close to heating elements
- Leave sufficient free space to ensure that the air required for cooling purposes can circulate from the bottom to the top of the unit.


Clearance



Mounting Types




Type B Mounting



Type C Mounting

mm



By removing the protective blanking cover from the top of the drive, the degree of protection for the drive becomes IP 20.

The protective blanking cover may vary according to the drive model (refer to the user guide).


The protective blanking cover must be removed from ATV 71P••••N4Z drives when they are mounted in a dust and damp proof enclosure.

Specific Recommendations for Mounting the Drive in an Enclosure

Ventilation

To ensure proper air circulation in the drive:

- Fit ventilation grilles.
- Ensure that there is sufficient ventilation. If there is not, install a forced ventilation unit with a filter. The openings and/or fans must provide a flow rate at least equal to that of the drive fans (refer to the product characteristics).



- Use special filters with IP 54 protection.
- Remove the blanking cover from the top of the drive.


Dust and Damp Proof Metal Enclosure (IP 54)

The drive must be mounted in a dust and damp proof enclosure in certain environmental conditions: dust, corrosive gases, high humidity with risk of condensation and dripping water, splashing liquid, etc. This enables the drive to be used in an enclosure where the maximum internal temperature reaches 50°C.

Connections and Schema

Wiring Diagram Conforming to Standards EN 954-1 Category 1, IEC/EN 61508 Capacity SIL1, in Stopping Category 0 According to IEC/EN 60204-1

Three-Phase Power Supply with Upstream Breaking via Contactor

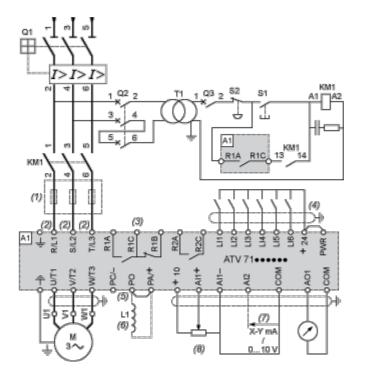

A1 ATV71 drive

- L1 DC choke
- Q1 Circuit-breaker
- Q2 GV2 L rated at twice the nominal primary current of T1
- Q3 GB2CB05

S1, S2 XB4 B or XB5 A pushbuttons

T1 100 VA transformer 220 V secondary

(1) Line choke (three-phase); mandatory for ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).

(2) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.

(3) Fault relay contacts. Used for remote signalling of the drive status.

(4) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).

(5) There is no PO terminal on ATV71HC11Y...HC63Y drives.

(6) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X, HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.


(7) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.

(8) Reference potentiometer.

KM1 Contactor

Wiring Diagram Conforming to Standards EN 954-1 Category 1, IEC/EN 61508 Capacity SIL1, in Stopping Category 0 According to IEC/EN 60204-1

Three-Phase Power Supply with Downstream Breaking via Switch Disconnector

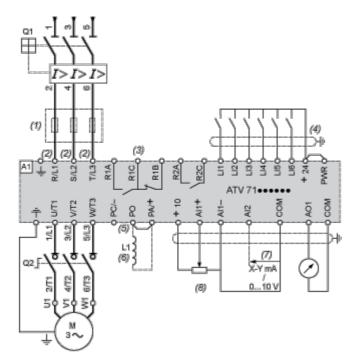

- A1 ATV71 drive
- L1 DC choke
- Q1 Circuit-breaker
- Q2 Switch disconnector (Vario)

(1) Line choke (three-phase), mandatory for ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).

(2) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.

(3) Fault relay contacts. Used for remote signalling of the drive status.

(4) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).

(5) There is no PO terminal on ATV71HC11Y...HC63Y drives.


(6) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X, HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.

(7) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.

(8) Reference potentiometer.

Wiring Diagram Conforming to Standards EN 954-1 Category 3, IEC/EN 61508 Capacity SIL2, in Stopping Category 0 According to IEC/EN 60204-1

Three-Phase Power Supply, Low Inertia Machine, Vertical Movement

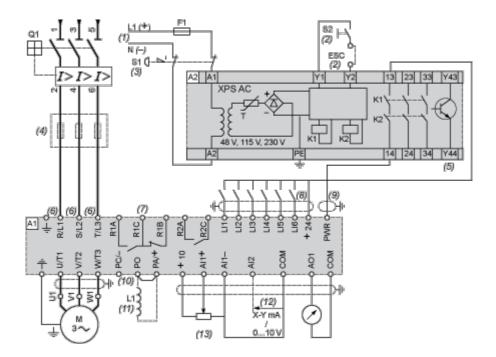

A1 ATV71 drive

A2 Preventa XPS AC safety module for monitoring emergency stops and switches. One safety module can manage the "Power Removal" function for several drives on the same machine. In this case, each drive must connect its PWR terminal to its + 24 V via the safety contacts on the XPS AC module. These contacts are independent for each drive.

F1 Fuse

L1 DC choke

Q1 Circuit-breaker

S1 Emergency stop button with 2 contacts

S2 XB4 B or XB5 A pushbutton

(1) Power supply: 24 Vdc or Vac, 48 Vac, 115 Vac, 230 Vac.

(2) S2: resets XPS AC module on power-up or after an emergency stop. ESC can be used to set external starting conditions.

(3) Requests freewheel stopping of the movement and activates the "Power Removal" safety function.

(4) Line choke (three-phase), mandatory for and ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).

(5) The logic output can be used to signal that the machine is in a safe stop state.

(6) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.

(7) Fault relay contacts. Used for remote signalling of the drive status.

(8) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).

(9) Standardized coaxial cable, type RG174/U according to MIL-C17 or KX3B according to NF C 93-550, external diameter 2.54 mm /0.09 in., maximum length 15 m / 49.21 ft. The cable shielding must be earthed.

(10) There is no PO terminal on ATV71HC11Y...HC63Y drives.


(11) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X,

HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.

- (12) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.
- (13) Reference potentiometer.

Wiring Diagram Conforming to Standards EN 954-1 Category 3, IEC/EN 61508 Capacity SIL2, in Stopping Category 1 According to IEC/EN 60204-1

Three-Phase Power Supply, High Inertia Machine

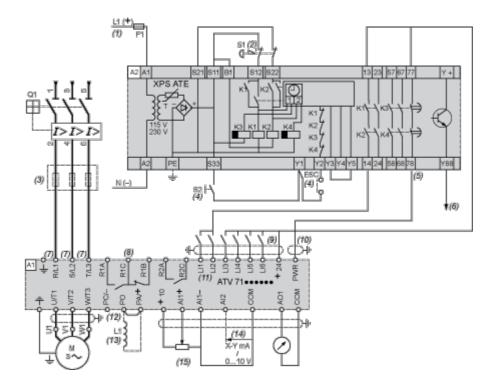

A1 ATV71 drive

A2 (5) Preventa XPS ATE safety module for monitoring emergency stops and switches. One safety module can manage the "Power Removal" safety function for several drives on the same machine. In this case the time delay must be adjusted on the drive controlling the motor that requires the longest stopping time. In addition, each drive must connect its PWR terminal to its + 24 V via the safety contacts on the XPS ATE module. These contacts are independent for each drive.

- F1 Fuse
- L1 DC choke
- Q1 Circuit-breaker
- S1 Emergency stop button with 2 N/C contacts
- S2 Run button
- (1) Power supply: 24 Vdc or Vac, 115 Vac, 230 Vac.
- (2) Requests controlled stopping of the movement and activates the "Power Removal" safety function.

(3) Line choke (three-phase), mandatory for ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).

(4) S2: resets XPS ATE module on power-up or after an emergency stop. ESC can be used to set external starting conditions.

(5) For stopping times requiring more than 30 seconds in category 1, use a Preventa XPS AV safety module which can provide a maximum time delay of 300 seconds.

(6) The logic output can be used to signal that the machine is in a safe state.

(7) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.

(8) Fault relay contacts. Used for remote signalling of the drive status.

(9) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).

(10) Standardized coaxial cable, type RG174/U according to MIL-C17 or KX3B according to NF C 93-550, external diameter 2.54 mm/0.09 in., maximum length 15 m/49.21 ft. The cable shielding must be earthed.

(11) Logic inputs LI1 and LI2 must be assigned to the direction of rotation: LI1 in the forward direction and LI2 in the reverse direction.

(12) There is no PO terminal on ATV71HC11Y...HC63Y drives.

(13) Optional DC choke for ATV71H••••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X, HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.

(14) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.


(15) Reference potentiometer.

Product data sheet

Performance Curves

Derating Curves

The derating curves for the drive nominal current (In) depend on the temperature, the switching frequency and the mounting type. For intermediate temperatures (e.g. 55°C), interpolate between 2 curves.



X Switching frequency

(1) Mounting type

Above 50°C, the drive should be fitted with a control card fan kit.