Specifications





(!) Discontinued

# variable speed drive ATV71 - 4kW-5HP - 240V - EMC filter-graphic terminal

ATV71HU40M3

- ! Discontinued on: Dec 2, 2020
- ! End-of-service on: Dec 31, 2020

Product availability: Non-Stock - Not normally stocked in distribution facility

#### Main

Range Of Product	Altivar 71				
Product Or Component Type	Variable speed drive				
Product Specific Application	Complex, high-power machines				
Component Name	ATV71				
Motor Power Kw	3 kW, single phase 200240 V				
	4 kW, 3 phase 200240 V				
Maximum Horse Power Rating	5 hp, 3 phase 200240 V				
Maximum Motor Cable Length	164.04 ft (50 m) shielded cable				
	328.08 ft (100 m) unshielded cable				
Power Supply Voltage	200240 V - 1510 %				
Phase	Single phase				
	3 phase				
Line Current	22 A 240 V single phase 3 kW				
	22.9 A 240 V 3 phase 4 kW / 5 hp				
	25.8 A 200 V 3 phase 4 kW / 5 hp				
	25.9 A 200 V 3 phase 3 kW				
Emc Filter	Integrated				
Assembly Style	With heat sink				
Apparent Power	9.5 kVA 240 V 3 phase 4 kW / 5 hp				
	5.3 kVA 240 V single phase 3 kW				
Prospective Line Isc	5 kA 3 phase				
	5 kA single phase				
Nominal Output Current	13.7 A 4 kHz 230 V 3 phase 3 kW				
	17.5 A 4 kHz 230 V 3 phase 4 kW / 5 hp				
Maximum Transient Current	26.3 A 60 s 3 phase 4 kW / 5 hp				
	28.8 A 2 s 3 phase 4 kW / 5 hp				
	20.6 A 60 s 3 phase 3 kW				
	22.6 A 2 s single phase 3 kW				
Output Frequency	0.1599 Hz				
Nominal Switching Frequency	4 kHz				
Switching Frequency	116 kHz adjustable				
	416 kHz with derating factor				
Asynchronous Motor Control	ENA (Energy adaptation) system for unbalanced loads				
Profile	Voltage/frequency ratio (2 or 5 points)				
	Flux vector control (FVC) with sensor (current vector)				
	Sensorless flux vector control (SFVC) (voltage or current vector)				

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Type Of Polarization	No impedance Modbus			
Complementary				
Product Destination	Synchronous motors Asynchronous motors			
Power Supply Voltage Limits	170264 V			
Power Supply Frequency	5060 Hz - 55 %			
Power Supply Frequency Limits	47.563 Hz			
Speed Range	1100 asynchronous motor in open-loop mode, without speed feedback     11000 asynchronous motor in closed-loop mode with encoder feedback     150 synchronous motor in open-loop mode, without speed feedback			
Speed Accuracy	+/- 0.01 % of nominal speed in closed-loop mode with encoder feedback 0.2 Tn to Tn +/- 10 % of nominal slip without speed feedback 0.2 Tn to Tn			
Torque Accuracy	+/- 15 % in open-loop mode, without speed feedback +/- 5 % in closed-loop mode with encoder feedback			
Fransient Overtorque	170 % +/- 10 % 60 s every 10 minutes 220 % +/- 10 % 2 s			
Braking Torque	<= 150 % with braking or hoist resistor 30 % without braking resistor			
Synchronous Motor Control Profile	Vector control without speed feedback			
Regulation Loop	Adjustable PI regulator			
Motor Slip Compensation	Automatic whatever the load  Not available in voltage/frequency ratio (2 or 5 points)  Adjustable  Suppressable			
Diagnostic	for drive voltage 1 LED (red)			
Output Voltage	<= power supply voltage			
Insulation	Electrical between power and control			
Type Of Cable For Mounting In An Enclosure	With a NEMA Type1 kit 3 UL 508 cable 104 °F (40 °C), copper 75 °C / PVC With an IP21 or an IP31 kit 3 IEC cable 104 °F (40 °C), copper 70 °C / PVC Without mounting kit 1 IEC cable 113 °F (45 °C), copper 70 °C / PVC Without mounting kit 1 IEC cable 113 °F (45 °C), copper 90 °C / XLPE/EPR			
Electrical Connection	Terminal 2.5 mm², AWG 14 Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, Ll1Ll6, PWR) Terminal 4 mm², AWG 10 L1/R, L2/S, L3/T, U/T1, V/T2, W/T3, PC/-, PO, PA/+, PA, PB)			
Tightening Torque	5.31 lbf.in (0.6 N.m) Al1-/Al1+, Al2, AO1, R1A, R1B, R1C, R2A, R2B, Ll1Ll6, PWR) 12.39 lbf.in (1.4 N.m), 12.3 lb.in L1/R, L2/S, L3/T, U/T1, V/T2, W/T3, PC/-, PO, PA/+, PA, PB)			
Supply	Internal arranti for reference material and a 40 kOhra 40 EV DO 17 E 97 340			

Absolute Accuracy Precision	+/- 0.6 % Al1-/Al1+) for a temperature variation 60 °C +/- 0.6 % Al2) for a temperature variation 60 °C +/- 1 % AO1) for a temperature variation 60 °C					
Linearity Error	+/- 0.15 % of maximum value Al1-/Al1+, Al2) +/- 0.2 % AO1)					
Analogue Output Number	1					
Analogue Output Type	AO1 software-configurable logic output 10 V 20 mA AO1 software-configurable current 020 mA 500 Ohm 10 bits AO1 software-configurable voltage 010 V DC 470 Ohm 10 bits					
Discrete Output Number	2					
Discrete Output Type	Configurable relay logic R1A, R1B, R1C) NO/NC - 100000 cycles Configurable relay logic R2A, R2B) NO - 100000 cycles					
Minimum Switching Current	3 mA 24 V DC configurable relay logic					
Maximum Switching Current	R1, R2 2 A 250 V AC inductive, cos phi = 0.4 R1, R2 2 A 30 V DC inductive, cos phi = 0.4 R1, R2 5 A 250 V AC resistive, cos phi = 1 R1, R2 5 A 30 V DC resistive, cos phi = 1					
Discrete Input Number	7					
Discrete Input Type	LI1LI5 programmable 24 V DC level 1 PLC 3500 Ohm LI6 switch-configurable 24 V DC level 1 PLC 3500 Ohm LI6 switch-configurable PTC probe 06 1500 Ohm PWR safety input 24 V DC 1500 Ohm ISO 13849-1 level d					
Discrete Input Logic	Negative logic (sink) LI1LI5), > 16 V, < 10 V Positive logic (source) LI1LI5), < 5 V, > 11 V Negative logic (sink) LI6)if configured as logic input, > 16 V, < 10 V Positive logic (source) LI6)if configured as logic input, < 5 V, > 11 V					
Acceleration And Deceleration Ramps	Linear adjustable separately from 0.01 to 9000 s S, U or customized Automatic adaptation of ramp if braking capacity exceeded, by using resistor					
Braking To Standstill	By DC injection					
Protection Type	Against exceeding limit speed drive Against input phase loss drive Break on the control circuit drive Input phase breaks drive Line supply overvoltage drive Line supply undervoltage drive Overcurrent between output phases and earth drive Overheating protection drive Overvoltages on the DC bus drive Short-circuit between motor phases drive Thermal protection drive Motor phase break motor Power removal motor Thermal protection motor					
Insulation Resistance	> 1 mOhm 500 V DC for 1 minute to earth					
Frequency Resolution	Analog input 0.024/50 Hz Display unit 0.1 Hz					
Communication Port Protocol	CANopen Modbus					
Connector Type	1 RJ45 on front face)Modbus 1 RJ45 on terminal)Modbus Male SUB-D 9 on RJ45CANopen					
Physical Interface	2-wire RS 485 Modbus					
Transmission Frame	RTU Modbus					
Transmission Rate	4800 bps, 9600 bps, 19200 bps, 38.4 Kbps Modbus on terminal 9600 bps, 19200 bps Modbus on front face 20 kbps, 50 kbps, 125 kbps, 250 kbps, 500 kbps, 1 Mbps CANopen					
Data Format	8 bits, 1 stop, even parity Modbus on front face 8 bits, odd even or no configurable parity Modbus on terminal					

Number Of Addresses	1127 CANopen 1247 Modbus			
Method Of Access	Slave CANopen			
Marking	CE			
Operating Position	Vertical +/- 10 degree			
Height	10.24 in (260 mm)			
Depth	7.36 in (187 mm)			
Width	6.10 in (155 mm)			
Net Weight 8.82 lb(US) (4 kg)				
Functionality	Full			
Specific Application	Other applications			
Option Card	Communication card CC-Link Controller inside programmable card Communication card DeviceNet Communication card EtherNet/IP Communication card Fipio I/O extension card Communication card Interbus-S Interface card for encoder Communication card Modbus Plus Communication card Modbus TCP Communication card Modbus/Uni-Telway Overhead crane card Communication card Profibus DP			

## **Environment**

Noise Level	54.5 dB 86/188/EEC				
Dielectric Strength	2830 V DC between earth and power terminals 4230 V DC between control and power terminals				
Electromagnetic Compatibility	1.2/50 µs - 8/20 µs surge immunity test level 3 IEC 61000-4-5 Conducted radio-frequency immunity test level 3 IEC 61000-4-6 Electrical fast transient/burst immunity test level 4 IEC 61000-4-4 Electrostatic discharge immunity test level 3 IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 IEC 61000-4-3 Voltage dips and interruptions immunity test IEC 61000-4-11				
Standards	IEC 60721-3-3 class 3S2 EN 61800-3 environments 2 category C3 EN/IEC 61800-3 UL Type 1 IEC 60721-3-3 class 3C1 EN/IEC 61800-5-1 EN 61800-3 environments 1 category C3 EN 55011 class A group 2				
Product Certifications	UL NOM 117 CSA C-tick GOST				
Pollution Degree	2 EN/IEC 61800-5-1				
Ip Degree Of Protection	IP20				
Vibration Resistance	1 gn 13200 Hz)EN/IEC 60068-2-6 1.5 mm peak to peak 313 Hz)EN/IEC 60068-2-6				
Shock Resistance	15 gn 11 ms EN/IEC 60068-2-27				
Relative Humidity	595 % without condensation IEC 60068-2-3 595 % without dripping water IEC 60068-2-3				
Ambient Air Temperature For Operation	14122 °F (-1050 °C) without derating)				

Ambient Air Temperature For Storage	-13158 °F (-2570 °C)
Operating Altitude	<= 3280.84 ft (1000 m) without derating 3280.849842.52 ft (10003000 m) with current derating 1 % per 100 m

# Ordering and shipping details

Category	US1CP4C22130
Discount Schedule	CP4C
Gtin	3389118064317
Returnability	No
Country Of Origin	FR

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	10.12 in (25.7 cm)
Package 1 Width	10.24 in (26 cm)
Package 1 Length	13.98 in (35.5 cm)
Package 1 Weight	12.40 lb(US) (5.624 kg)

# **Contractual warranty**

Warranty 18 months



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

## Well-being performance



Mercury Free



Rohs Exemption Information

Yes


## **Certifications & Standards**

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)			
	EU RoHS Declaration			
China Rohs Regulation	China RoHS declaration			
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.			
Circularity Profile	End of Life Information			
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov			

#### **Dimensions Drawings**

## UL Type 1/IP 20 Drives

#### **Dimensions without Option Card**




#### Dimensions in mm

а	b	С	G	Н	K	Ø
155	260	187	138	249	4	5

#### Dimensions in in.

Difficiologia in in.							
а	b	С	G	Н	K	Ø	
6.10	10.24	7.36	5.43	9.80	0.15	0.19	

#### **Dimensions with 1 Option Card (1)**



#### Dimensions in mm

а	c1	G	Н	K	Ø
155	210	138	249	4	5


#### Dimensions in in

Difficultions in in.								
а	c1	G	Н	K	Ø			
6.10	8.26	5.43	9.80	0.15	0.19			

(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card.

#### **Dimensions with 2 Option Cards (1)**

## ATV71HU40M3



#### Dimensions in mm

а	c2	G	Н	K	Ø	
155	233	138	249	4	5	

#### Dimensions in in.

а	c2	G	Н	K	Ø
6.10	9.17	5.43	9.80	0.15	0.19

(1) Option cards: I/O extension cards, communication cards or "Controller Inside" programmable card.

#### Mounting and Clearance


#### **Mounting Recommendations**

Depending on the conditions in which the drive is to be used, its installation will require certain precautions and the use of appropriate accessories.

Install the unit vertically:


- Avoid placing it close to heating elements
- Leave sufficient free space to ensure that the air required for cooling purposes can circulate from the bottom to the top of the unit.


#### Clearance




#### **Mounting Types**

#### Type A Mounting

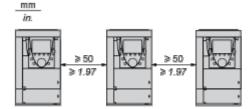



#### Type C Mounting



By removing the protective blanking cover from the top of the drive, the degree of protection for the drive becomes IP 20.

The protective blanking cover may vary according to the drive model (refer to the user guide).

# Product data sheet ATV71HU40M3


The protective blanking cover must be removed from ATV 71P•••N4Z drives when they are mounted in a dust and damp proof enclosure.

#### Specific Recommendations for Mounting the Drive in an Enclosure

#### Ventilation

To ensure proper air circulation in the drive:

- Fit ventilation grilles.
- Ensure that there is sufficient ventilation. If there is not, install a forced ventilation unit with a filter. The
  openings and/or fans must provide a flow rate at least equal to that of the drive fans (refer to the product
  characteristics).



- Use special filters with IP 54 protection.
- Remove the blanking cover from the top of the drive.

#### **Dust and Damp Proof Metal Enclosure (IP 54)**


The drive must be mounted in a dust and damp proof enclosure in certain environmental conditions: dust, corrosive gases, high humidity with risk of condensation and dripping water, splashing liquid, etc.

This enables the drive to be used in an enclosure where the maximum internal temperature reaches 50°C.

#### Connections and Schema

Wiring Diagram Conforming to Standards EN 954-1 Category 1, IEC/EN 61508 Capacity SIL1, in Stopping Category 0 According to IEC/EN 60204-1

#### Three-Phase Power Supply with Upstream Breaking via Contactor

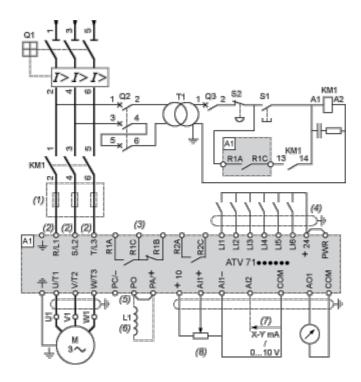

A1 ATV71 drive

KM1 Contactor

L1 DC choke

Q1 Circuit-breaker

Q2 GV2 L rated at twice the nominal primary current of T1

Q3 GB2CB05

S1, S2 XB4 B or XB5 A pushbuttons


T1 100 VA transformer 220 V secondary

- (1) Line choke (three-phase); mandatory for ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).
- (2) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.
- (3) Fault relay contacts. Used for remote signalling of the drive status.
- (4) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).
- (5) There is no PO terminal on ATV71HC11Y...HC63Y drives.
- (6) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X, HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.
- (7) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.
- (8) Reference potentiometer.

## Product data sheet ATV71HU40M3

Wiring Diagram Conforming to Standards EN 954-1 Category 1, IEC/EN 61508 Capacity SIL1, in Stopping Category 0 According to IEC/EN 60204-1

#### **Power Section for Single-Phase Power Supply**

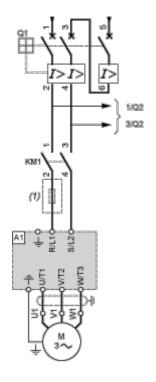

A1 ATV71 drive

KM1 Contactor


Q1 Circuit-breaker

Q2 GV2 L rated at twice the nominal primary current of T1

(1) Line Choke (single-phase); mandatory for ATV71HU40M3...HU75M3 drives with a 200...240 V 50/60 Hz single-phase power supply.

Wiring Diagram Conforming to Standards EN 954-1 Category 1, IEC/EN 61508 Capacity SIL1, in Stopping Category 0 According to IEC/EN 60204-1


Three-Phase Power Supply with Downstream Breaking via Switch Disconnector

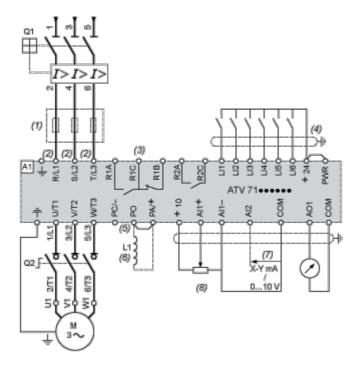

- A1 ATV71 drive
- L1 DC choke
- Q1 Circuit-breaker
- Q2 Switch disconnector (Vario)
- (1) Line choke (three-phase), mandatory for ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).
- (2) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.
- (3) Fault relay contacts. Used for remote signalling of the drive status.
- (4) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).
- (5) There is no PO terminal on ATV71HC11Y...HC63Y drives.
- (6) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X, HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.
- (7) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.
- (8) Reference potentiometer.

Wiring Diagram Conforming to Standards EN 954-1 Category 1, IEC/EN 61508 Capacity SIL1, in Stopping Category 0 According to IEC/EN 60204-1


#### **Power Section for Single-Phase Power Supply**

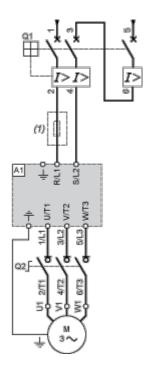

- A1 ATV71 drive
- Q1 Circuit-breaker
- Q2 Switch disconnector (Vario)
- (1) Line Choke (single-phase); mandatory for ATV71HU40M3...HU75M3 drives with a 200...240 V 50/60 Hz single-phase power supply.

Wiring Diagram Conforming to Standards EN 954-1 Category 3, IEC/EN 61508 Capacity SIL2, in Stopping Category 0 According to IEC/EN 60204-1

#### Three-Phase Power Supply, Low Inertia Machine, Vertical Movement

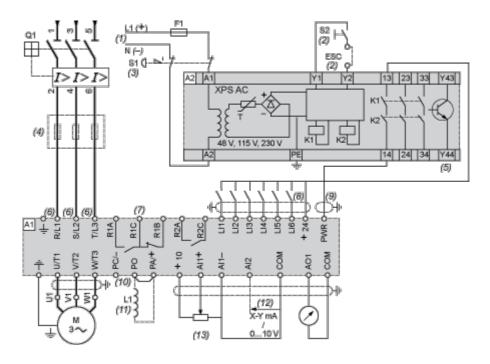

#### A1 ATV71 drive

A2 Preventa XPS AC safety module for monitoring emergency stops and switches. One safety module can manage the "Power Removal" function for several drives on the same machine. In this case, each drive must connect its PWR terminal to its + 24 V via the safety contacts on the XPS AC module. These contacts are independent for each drive.

- F1 Fuse
- L1 DC choke
- Q1 Circuit-breaker
- S1 Emergency stop button with 2 contacts
- S2 XB4 B or XB5 A pushbutton
- (1) Power supply: 24 Vdc or Vac, 48 Vac, 115 Vac, 230 Vac.
- (2) S2: resets XPS AC module on power-up or after an emergency stop. ESC can be used to set external starting conditions.
- (3) Requests freewheel stopping of the movement and activates the "Power Removal" safety function.
- (4) Line choke (three-phase), mandatory for and ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).
- (5) The logic output can be used to signal that the machine is in a safe stop state.
- (6) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.
- (7) Fault relay contacts. Used for remote signalling of the drive status.
- (8) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).
- (9) Standardized coaxial cable, type RG174/U according to MIL-C17 or KX3B according to NF C 93-550, external diameter 2.54 mm /0.09 in., maximum length 15 m / 49.21 ft. The cable shielding must be earthed.
- (10) There is no PO terminal on ATV71HC11Y...HC63Y drives.
- (11) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X,

## ATV71HU40M3


HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.

- (12) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.
- (13) Reference potentiometer.

## ATV71HU40M3

Wiring Diagram Conforming to Standards EN 954-1 Category 3, IEC/EN 61508 Capacity SIL2, in Stopping Category 0 According to IEC/EN 60204-1

#### **Power Section for Single-Phase Power Supply**

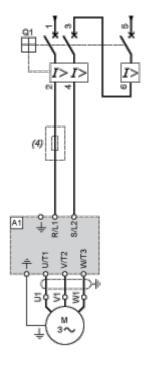

A1 ATV71 drive

May 15, 2024


- Q1 Circuit-breaker
- (4) Line Choke (single-phase); mandatory for ATV71HU40M3...HU75M3 drives with a 200...240 V 50/60 Hz single-phase power supply.

All terminals are located at the bottom of the drive. Fit interference suppressors on all inductive circuits near the drive or connected on the same circuit, such as relays, contactors, solenoid valves, fluorescent lighting, etc.

19

Wiring Diagram Conforming to Standards EN 954-1 Category 3, IEC/EN 61508 Capacity SIL2, in Stopping Category 1 According to IEC/EN 60204-1

#### Three-Phase Power Supply, High Inertia Machine

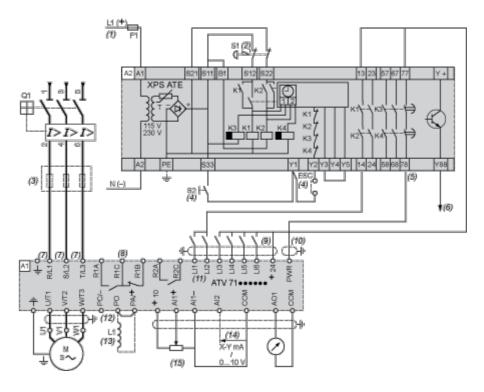

#### A1 ATV71 drive

- A2 (5) Preventa XPS ATE safety module for monitoring emergency stops and switches. One safety module can manage the "Power Removal" safety function for several drives on the same machine. In this case the time delay must be adjusted on the drive controlling the motor that requires the longest stopping time. In addition, each drive must connect its PWR terminal to its + 24 V via the safety contacts on the XPS ATE module. These contacts are independent for each drive.
- F1 Fuse
- L1 DC choke
- Q1 Circuit-breaker
- S1 Emergency stop button with 2 N/C contacts
- S2 Run button

20


- (1) Power supply: 24 Vdc or Vac, 115 Vac, 230 Vac.
- (2) Requests controlled stopping of the movement and activates the "Power Removal" safety function.
- (3) Line choke (three-phase), mandatory for ATV71HC11Y...HC63Y drives (except when a special transformer is used (12-pulse)).
- (4) S2: resets XPS ATE module on power-up or after an emergency stop. ESC can be used to set external starting conditions.
- (5) For stopping times requiring more than 30 seconds in category 1, use a Preventa XPS AV safety module which can provide a maximum time delay of 300 seconds.
- (6) The logic output can be used to signal that the machine is in a safe state.
- (7) For ATV71HC40N4 drives combined with a 400 kW motor, ATV71HC50N4 and ATV71HC40Y...HC63Y, refer to the power terminal connections diagram.
- (8) Fault relay contacts. Used for remote signalling of the drive status.

## ATV71HU40M3

- (9) Connection of the common for the logic inputs depends on the positioning of the SW1 switch. The above diagram shows the internal power supply switched to the "source" position (for other connection types, refer to the user guide).
- (10) Standardized coaxial cable, type RG174/U according to MIL-C17 or KX3B according to NF C 93-550, external diameter 2.54 mm/0.09 in., maximum length 15 m/49.21 ft. The cable shielding must be earthed.
- (11) Logic inputs LI1 and LI2 must be assigned to the direction of rotation: LI1 in the forward direction and LI2 in the reverse direction.
- (12) There is no PO terminal on ATV71HC11Y...HC63Y drives.
- (13) Optional DC choke for ATV71H•••M3, ATV71HD11M3X...HD45M3X, ATV71•075N4...•D75N4 and ATV71P•••N4Z drives. Connected in place of the strap between the PO and PA/+ terminals. For ATV71HD55M3X, HD75M3X, ATV71HD90N4...HC50N4 drives, the choke is supplied with the drive; the customer is responsible for connecting it.
- (14) Software-configurable current (0...20 mA) or voltage (0...10 V) analog input.
- (15) Reference potentiometer.

Wiring Diagram Conforming to Standards EN 954-1 Category 3, IEC/EN 61508 Capacity SIL2, in Stopping Category 1 According to IEC/EN 60204-1

**Power Section for Single-Phase Power Supply** 

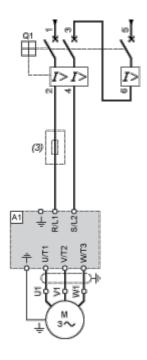


- A1 ATV71 drive
- Q1 Circuit-breaker
- (3) Line Choke (single-phase); mandatory for ATV71HU40M3...HU75M3 drives with a 200...240 V 50/60 Hz single-phase power supply.

## ATV71HU40M3

#### **Performance Curves**

#### **Derating Curves**

The derating curves for the drive nominal current (In) depend on the temperature, the switching frequency and the mounting type. For intermediate temperatures (e.g. 55°C), interpolate between 2 curves.



- X Switching frequency
- (1) Mounting type