Product data sheet

Specifications





Unity Hot Standby processor with single mode Ethernet - 11 MB - 266 MHz

140CPU67861

Modicon Quantum automation platform

Unity processor

- ! Discontinued on: Dec 31, 2018
- ! To be end-of-service on: Dec 31, 2026

① Discontinued - Service only

Main

Range Of Product

Product Or Component Type

Application Specific I/O

Communication Service

Maximum Number Of Connections

Number Of Optional Modules

Integrated Connection Type

Complementary	
Mode Of Transmission	Single mode
Clock Frequency	266 MHz
Number Of Slots	10 16 4 6 2
Number Of Racks	2 - local
Number Of Distributed I/O Station	63 1 3 Modbus Plus
Number Of Remote I/O Station	31 - 2 S908 remote I/O 31 - 2 ethernet Quantum remote I/O 31 - 2 ethernet X80 remote I/O
Discrete I/O Number	31744 inputs, 31744 outputs - remote 8000 inputs, 8000 outputs - distributed - per network Modbus Plus Unlimited (31 drops of 28 slots max) - ethernet remote I/O 0 - local - forbidden in Hot Standby application
Analogue I/O Number	500 inputs, 500 outputs - distributed - per network Modbus Plus Unlimited (31 drops of 28 slots max) - ethernet remote I/O 1984 inputs,1984 outputs - remote 0 - local - forbidden in Hot Standby application

6 Ethernet, Modbus, Modbus Plus, Profibus DP, Sy/Max)

1 optic fibre Hot Standby

1 Modbus Plus 1 Modbus 1 USB

High-speed interrupt inputs Accurate time stamping

2 AS-Interface - distributed 4 AS-Interface - remote 6 Ethernet TCP/IP - local 6 Modbus Plus - local 6 Profibus DP - local

Counter

Ethernet router

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

1 Modbus RS232/485 Modbus/ASCII)



Checks	Hot standby Process control
Memory Description	Expandable 8 MB - file storage with PCMCIA card Internal RAM 11264 kB - 1536 kB for data
Switch Function	Key switch memory port on/off
Application Structure	1 periodic fast task - forbidden in Hot Standby application 128 I/O interrupt tasks - forbidden in Hot Standby application 128 interrupt tasks - forbidden in Hot Standby application 32 timer interrupt tasks - forbidden in Hot Standby application 4 auxiliary tasks - forbidden in Hot Standby application 1 cyclic/periodic master task -
Number Of Instructions Per Ms	10.28 Kinst/ms 100 % Boolean 10.07 Kinst/ms 65 % Boolean and 35 % numerical
System Overhead	0.2 ms fast task 1 ms master task
Bus Current Requirement	2760 mA
Local Signalling	for Ethernet activity (COM) 1 LED (green) for Ethernet collision 1 LED (red)
Electrical Connection	1 female connector SUB-D 9 for connecting to the Modbus Plus network 1 connector RJ45 for connecting Modbus bus 1 connector LC (single mode fiber optic) for interconnecting primary and secondary PLCs up to 16 km

Environment

Protective Treatment	Conformal coating Humiseal 1A33
Product Certifications	UL CE CSA GOST Misc (Marine)
Standards	HazLoc

Ordering and shipping details

Category	18150-QUANTUM CONTROLLERS,HSBY,COMM.
Discount Schedule	PC21
Gtin	3595864173474
Returnability	No
Country Of Origin	FR

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.33 in (11.0 cm)
Package 1 Width	7.28 in (18.5 cm)
Package 1 Length	12.80 in (32.5 cm)
Package 1 Weight	3.14 lb(US) (1.424 kg)
Unit Type Of Package 2	S04
Number Of Units In Package 2	6
Package 2 Height	11.81 in (30.0 cm)
Package 2 Width	15.75 in (40.0 cm)

Package 2 Length	23.62 in (60.0 cm)
Package 2 Weight	18.84 lb(US) (8.544 kg)



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

Certifications & Standards

Eu Rohs Directive Pro-active compliance (Product out of EU RoHS legal scope)


EU RoHS Declaration

Circularity Profile End of Life Information

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

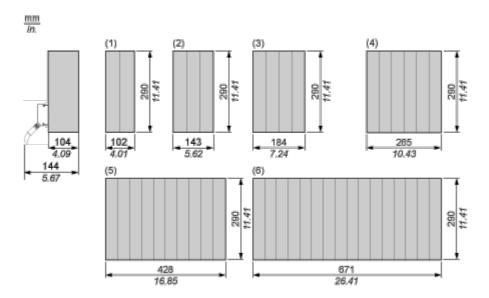

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots