# **Product data sheet**

Specifications





## discrete output module Modicon Quantum - 16 O - 20..132 V AC

140DAO84010C

Discontinued on: Mar 15, 2022



### Main

Range Of Product	Modicon Quantum automation platform
Product Or Component Type	AC discrete output modules
Discrete Output Number	16

## Complementary

Discrete Output Type	Isolated
Group Of Channels	16 groups of 1 channel
Supply Frequency	4763 Hz
Maximum Voltage Drop	1.5 V
Discrete Output Voltage	20132 V AC
Addressing Requirement	1 output word
Absolute Maximum Output	156 V 10 s AC 200 V during one cycle AC
Maximum Load Current	1 mA rms 24 V off state leakage/points 1 mA rms 48 V off state leakage/points 2 mA rms 115 V off state leakage/points 16 A rms per module 4 A rms sum of four points, continuous 4 A rms 20132 V each point
Surge Current	20 A during 2 cycles per point 30 A during 1 cycle per point 30 A during 3 cycles per point
Dv/Dt	400 V/ms
Response Time	<= 0.5 ms at state 0 to state 1 <= 0.5 ms at state 1 to state 0
Protection Type	Internal by RC filter
Power Dissipation	1.85 + (1.1 V x total module load current)
Associated Fuse Rating	5 A
Marking	CE
Local Signalling	for bus communication is present (Active) 1 LED (green) for external fault detected (F) 1 LED (red) for input status 16 LEDs (green)
Bus Current Requirement	350 mA
Module Format	Standard
Net Weight	1.07 lb(US) (0.485 kg)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

### **Environment**

Protective Treatment	Conformal coating Humiseal 1A33
Product Certifications	FM Class 1 Division 2 cUL
Standards	UL 508 CSA C22.2 No 142
Electromagnetic Compatibility	Electrostatic discharge immunity test - test level: 4 kV (contact discharge) conforming to IEC 801-2 Electrostatic discharge immunity test - test level: 8 kV (air discharge) conforming to IEC 801-2 Susceptibility to electromagnetic fields - test level: 10 V/m (801000 MHz) conforming to IEC 801-3
Ambient Air Temperature For Operation	32140 °F (060 °C)
Ambient Air Temperature For Storage	-40185 °F (-4085 °C)
Relative Humidity	95 % without condensation
Operating Altitude	<= 16404.2 ft (5000 m)

## Ordering and shipping details

Category	18155-QUANTUM I/O & POWER SUPPLIES	
Discount Schedule	PC21	
Gtin	3595861137479	
Returnability	No	
Country Of Origin	CN	

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	1.97 in (5.0 cm)
Package 1 Width	6.50 in (16.5 cm)
Package 1 Length	12.40 in (31.5 cm)
Package 1 Weight	22.12 oz (627.0 g)
Unit Type Of Package 2	S02
Number Of Units In Package 2	2
Package 2 Height	5.91 in (15 cm)
Package 2 Width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)
Package 2 Weight	2.76 lb(US) (1.254 kg)
Package 3 Height	11.81 in (30 cm)

## **Contractual warranty**

Warranty	18 months



**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

### Well-being performance

<b>②</b>	Reach Free Of Svhc	
<b>⊘</b>	Mercury Free	
<b>⊘</b>	Rohs Exemption Information	Yes


### **Certifications & Standards**

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
	EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

### **Dimensions Drawings**

### **Racks for Modules Mounting**

#### **Dimensions of Modules and Racks**

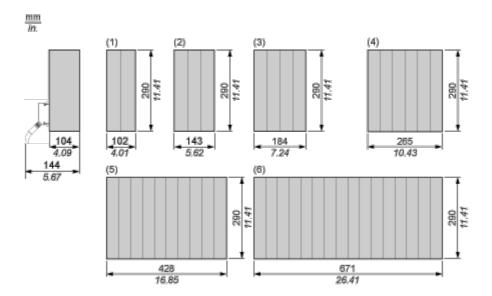


- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

#### Connections and Schema

#### 24...115 Vac Discrete Output Module

#### Wiring Diagram

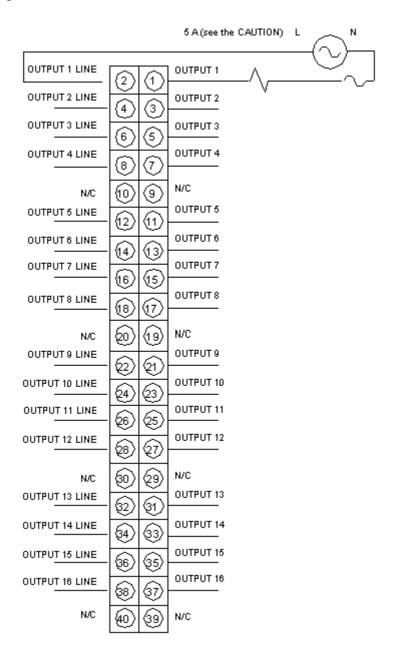

N/C Not Connected