# Product data sheet

Specifications





# discrete input module Modicon Quantum - 32 I - 10..60 V DC

140DDI85300

- ! Discontinued on: Dec 31, 2022
- ! To be end-of-service on: Dec 31, 2030

① Discontinued - Service only

Product availability: Non-Stock - Not normally stocked in distribution facility

#### Main

Range Of Product	Modicon Quantum automation platform
Product Or Component Type	Dc discrete input modules
Discrete Input Number	32

## Complementary

Group Of Channels	4
Logic Input	Positive (sink)
Input Voltage Limits	1060 V
Input Voltage	12 V 510 mA DC 24 V 630 mA DC 48 V 215 mA DC 60 V 15 mA DC
Voltage State 1 Guaranteed	912 V 12 V +/- 5 % 1124 V 24 V - 1520 % 3448 V 48 V - 1520 % 4560 V 60 V - 1520 %
Voltage State 0 Guaranteed	01.8 V 12 V +/- 5 % 010 V 48 V - 1520 % 012.5 V 60 V - 1520 % 05 V 24 V - 1520 %
Absolute Maximum Voltage	75 V
Addressing Requirement	2 input words
Response Time	4 ms from state 0 to state 1 4 ms from state 1 to state 0
Switching Frequency	<= 100 Hz
Isolation Between Group And Bus	2500 Vrms DC for 1 minute
Isolation Between Group	700 Vrms DC for 1 minute
Power Dissipation	1 W + (0.25 x number of points on)
Marking	CE
Local Signalling	for bus communication is present (Active) 1 LED (green) for input status 32 LEDs (green)
Bus Current Requirement	300 mA
Module Format	Standard
Net Weight	0.65 lb(US) (0.295 kg)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

## **Environment**

Standards	EN/IEC 61131-2 CSA C22.2 No 142 UL 508	
Product Certifications	RCM Merchant Navy UL EAC CSA CE hazardous location class 1, division 2	
Resistance To Electrostatic Discharge	4 kV contact IEC 801-2 8 kV on air IEC 801-2	
Resistance To Electromagnetic Fields	9.14 V/m (10 V/m) 802000 MHz IEC 801-3	
Ambient Air Temperature For Operation	32140 °F (060 °C)	
Ambient Air Temperature For Storage	-40185 °F (-4085 °C)	
Relative Humidity	umidity 95 % without condensation	
Operating Altitude	<= 16404.2 ft (5000 m)	

# Ordering and shipping details

Category	US1PC2118155
Discount Schedule	PC21
Gtin	3595861000100
Returnability	No
Country Of Origin	US

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	6.42 in (16.3 cm)
Package 1 Width	1.77 in (4.5 cm)
Package 1 Length	12.28 in (31.2 cm)
Package 1 Weight	15.10 oz (428.0 g)
Unit Type Of Package 2	S03
Number Of Units In Package 2	7
Package 2 Height	11.81 in (30.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	6.59 lb(US) (2.989 kg)

# **Contractual warranty**

Warranty 18 months



**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



RoHS/REACh

## Well-being performance

<b>⊘</b>	Reach Free Of Svhc	
<b>②</b>	Mercury Free	
<b>②</b>	Rohs Exemption Information	Yes


### **Certifications & Standards**

Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
	EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

## **Dimensions Drawings**

### **Racks for Modules Mounting**

#### **Dimensions of Modules and Racks**

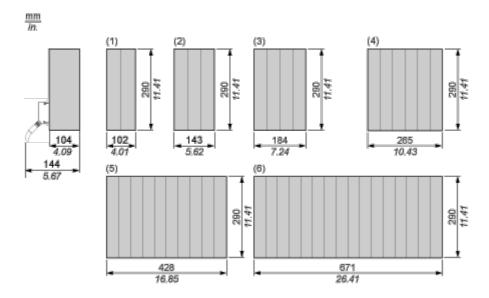

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

### 140DDI85300

#### Connections and Schema

#### 10...60 Vdc Discrete Input Sink Module

#### Wiring Diagram

Apr 25, 2024

