

# Product data sheet

## Characteristics

# RE7MY13BU

time delay relay 8 functions - 0.05..1 s - 24 V AC  
DC - 2OC

Product availability : Non-Stock - Not normally stocked in distribution facility

Price\*\* : 252.00 USD



⚠ Discontinued

## Commercial status

Discontinued: 01 June 2016

End-of-service: 01 June 2016

## Main

Range of product	Zelio Time
Product or component type	Industrial timing relay
Contacts type and composition	2 C/O
Component name	RE7
Time delay type	Qt A C H Qg W D Di
Time delay range	0.05 s...300 h

## Complementary

Discrete output type	Relay
Contacts material	90/10 silver nickel contacts
Width pitch dimension	0.89 in (22.5 mm)
[Us] rated supply voltage	110...240 V AC 50/60 Hz 24 V AC/DC 50/60 Hz 42...48 V AC/DC 50/60 Hz
Voltage range	0.85...1.1 Us
Connections - terminals	Screw terminals, 2 x 1.5 mm <sup>2</sup> flexible with cable end Screw terminals, 2 x 2.5 mm <sup>2</sup> flexible without cable end
Tightening torque	5.31...9.74 lbf.in (0.6...1.1 N.m)
Setting accuracy of time delay	+/- 10 % of full scale
Repeat accuracy	+/- 0.2 %
Temperature drift	< 0.07 %/°C
Voltage drift	< 0.2 %/V
Minimum pulse duration	20 ms
Reset time	50 ms
Maximum switching voltage	250 V AC/DC
Mechanical durability	20000000 cycles

[I <sub>th</sub> ] conventional free air thermal current	8 A
Maximum [I <sub>e</sub> ] rated operational current	2 A DC-13 24 V 158 °F (70 °C) IEC 60947-5-1/1991/VDE 0660 0.1 A DC-13 250 V 158 °F (70 °C) IEC 60947-5-1/1991/VDE 0660 0.2 A DC-13 115 V 158 °F (70 °C) IEC 60947-5-1/1991/VDE 0660 3 A AC-15 158 °F (70 °C) IEC 60947-5-1/1991/VDE 0660
Minimum switching capacity	10 mA 12 V
Input voltage	< 60 V Y1Z2
Maximum switching current	1 mA Y1Z2)
Input compatibility	3/4 wires sensors PNP/NPN without internal load <164.04 ft (50 m) Y1Z2
Potentiometer characteristic	Linear 47 kOhm +/- 20 %), 0.2 W 82.02 ft (25 m) Z1Z2
Marking	CE
Overvoltage category	III IEC 60664-1
[U <sub>i</sub> ] rated insulation voltage	250 V between contact circuit and control inputs IEC 250 V between contact circuit and power supply IEC 300 V between contact circuit and control inputs CSA 300 V between contact circuit and power supply CSA
Supply disconnection value	> 0.1 U <sub>c</sub>
Operating position	Any position without
Surge withstand	2 kV IEC 61000-4-5 level 3
Power consumption in VA	2 VA 48 V 1.2 VA 24 V 12.5 VA 240 V 2.8 VA 110 V
Maximum power consumption in W	0.8 W 24 V 1.6 W 48 V
Terminal description	ALT (Z2)UNUSED (B1-A2)CO (15-16-18)OC (25-26-28)OC (Y1)UNUSED (Z1)UNUSED
Height	3.07 in (78 mm)
Width	0.89 in (22.5 mm)
Depth	3.15 in (80 mm)
Net weight	0.33 lb(US) (0.15 kg)

## Environment

Immunity to microbreaks	3 ms
Standards	EN/IEC 61812-1
Product certifications	UL CSA GL
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Ambient air temperature for operation	-4...140 °F (-20...60 °C)
Relative humidity	15...85 % 3K3 IEC 60721-3-3
Vibration resistance	0.35 mm 10...55 Hz)IEC 60068-2-6
Shock resistance	15 gn 11 ms IEC 60068-2-27
IP degree of protection	IP20 terminals) IP50 housing)
Pollution degree	3 IEC 60664-1
Dielectric strength	2.5 kV
Non-dissipating shock wave	4.8 kV
Resistance to electrostatic discharge	6 kV in contact IEC 61000-4-2 level 3 8 kV in air IEC 61000-4-2 level 3
Resistance to electromagnetic fields	9.14 V/m (10 V/m) IEC 61000-4-3 level 3
Resistance to fast transients	2 kV IEC 61000-4-4 level 3
Disturbance radiated/conducted	CISPR 11 group 1 - class A

### Ordering and shipping details


Category	22376 - RELAYS-MEASUREMENT(RM4)
Discount Schedule	CP2
GTIN	00785901708902
Package weight(Lbs)	0.14 kg (0.31 lb(US))
Returnability	No
Country of origin	ID

### Contractual warranty


Warranty	18 months
----------	-----------

Width 22.5 mm


Rail Mounting



Screw Fixing



Internal Wiring Diagram




---

Recommended Application Wiring Diagram

---

Start on Energisation




- 1 Supply
- 2 12...48 V
- 3 24 V

---

Recommended Application Wiring Diagram

---

Start by External Control




- 1 Supply
- 2 12...48 V
- 3 24 V

---

Recommended Application Wiring Diagram

---

External Control of Partial Stop



- 1 Supply
- 2 12...48 V
- 3 24 V




---

Control of Several Relays

---


Control of several relays with a single external control contact

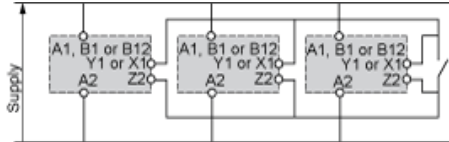

---


## Connection of an External Control Contact Without Using Terminal Z2

---



Direct current supply only.

It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.




Direct current supply only.

It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.

---

## Connection 3-Wire NPN or PNP Sensor

---




---

Connection 3-Wire NPN or PNP Sensor Without Using Terminal Z2


---

Connection NPN



It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.

Connection PNP




It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.

---

## Connection of Potentiometer

---




Connection Precautions

**⚠ WARNING**

**UNEXPECTED EQUIPMENT OPERATION**

No galvanic isolation between supply terminals and control inputs.


Failure to follow these instructions can result in death, serious injury, or equipment damage.



Performance Curves

A.C. Load Curve 1


Electrical durability of contacts on resistive loading millions of operating cycles



X Current broken in A  
Y Millions of operating cycles


A.C. Load Curve 2

Reduction factor k for inductive loads (applies to values taken from durability curve 1).




X Power factor on breaking (cos φ)  
Y Reduction factor k

Example: An LC1-F185 contactor supplied with 115 V/50 Hz for a consumption of 55 VA or a current consumption equal to 0.1 A and cos φ = 0.3. For 0.1 A, curve 1 indicates a durability of approximately 1.5 million operating cycles. As the load is inductive, it is necessary to apply a reduction coefficient k to this number of cycles as indicated by curve 2. For cos φ = 0.3: k = 0.6 The electrical durability therefore becomes:  $1.5 \cdot 10^6$  operating cycles  $\times$  0.6 = 900 000 operating cycles.



### D. C. Load Limit Curve



- X Current in A
- Y Voltage in V
- 1 L/R = 20 ms
- 2 L/R with load protection diode
- 3 Resistive load



---

Function A : Power on Delay Relay

---


Description

The timing period T begins on energisation. After timing, the output(s) R close(s). The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs



2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

---


Function C : Off-Delay Relay with Control Signal

---


Description

After power-up and closing of the control contact C, the output R closes. When control contact C re-opens, timing T starts. At the end of the timing period, the output(s) R revert(s) to its/their initial state. The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs



2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

---

Function D : Symmetrical Flasher Relay (Starting Pulse Off)

---


Description

Repetitive cycle with two timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.  
The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs

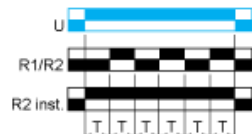

2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

---


Function Di : Symmetrical Flasher Relay (Starting Pulse On)

---


Description

Repetitive cycle with two timing periods  $T$  of equal duration, with output(s)  $R$  changing state at the end of each timing period  $T$ .  
The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs

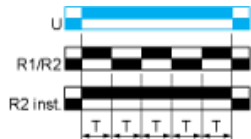

2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

---

Function H : Interval Relay

---


Description

On energisation of the relay, timing period T starts and the output(s) R close(s). At the end of the timing period T, the output(s) R revert(s) to its/ their initial state. The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs

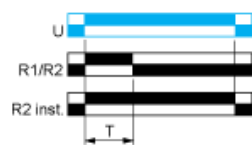

2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

---


Function Qg: Star-Delta Timing

---

Description

Timing for star-delta starter with contact for switching to star connection.

Function: 1 Output



---


Function Qt: Star-Delta Timing

---

Description

Timing for star-delta starter with double On-delay period.

Function: 1 Output



---

Function W : Interval Relay with Control Signal Off

---


Description

After power-up and opening of the control contact, the output(s) close(s) for a timing period T.  
At the end of this timing period the output(s) revert(s) to its/their initial state.  
The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs



2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.).



---

Legend

---

Relay de-energised

Relay energised

Output open

Output closed

C Control contact

G Gate

R Relay or solid state output

R1/R2 2 timed outputs

R2 inst. The second output is instantaneous if the right position is selected

T Timing period

Ta - Adjustable On-delay

Tr - Adjustable Off-delay

U Supply

RE7MY13BU is replaced by:

---



Relay Output RE22R2MYMR

Multi-function Timing Relay - 0.05s...300h - 24...240V AC/DC - 2C/O

Qty 1

Reason for Substitution: End of life | Substitution date: 01 January 2017

---