
# Product data sheet

Specifications

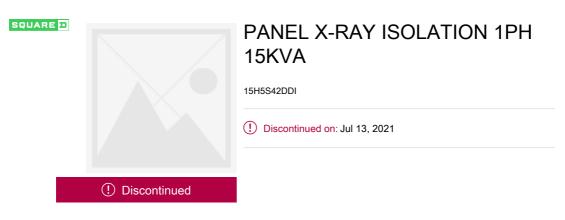

#### Main

**Device Application** 

Power supply for portable equipment

### Complementary

Line Rated Current	60 A 1), secondary circuit 90 A, primary circuit
Device Composition	XR29420 trim panel
Device Mounting	53015BB flush mounting box 53019BB surface mounting box
Interlocking Type	Mechanical
Mounting Support	wall
Phase	1 phase
Primary Voltage	277 V
Product Destination	socket-outlet
Rated Power In Va	15 kVA
Secondary Voltage	208 V
Supply	15XR42 via mains transformer to be ordered separately

#### Environment

Product Certifications

UL Listed

## Ordering and shipping details

Category	16005-X-RAY PANELS NON STOCK
Discount Schedule	01
Returnability	No
Country Of Origin	US

#### **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Weight	55.00 lb(US) (24.948 kg)

### **Contractual warranty**

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Warranty

18 months

### Sustainability

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >

Eu Rohs Directive	Not applicable, out of EU RoHS legal scope
California Proposition 65	WARNING: This product can expose you to chemicals including: Nickel (Metallic), which is known to the State of California to cause cancer, and Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.p65warnings.ca.gov