


# 8501XO1000V04

## Control Relay with 277VAC-60Hz Coil with 10 NO Contacts



Price\* : 336.00 USD

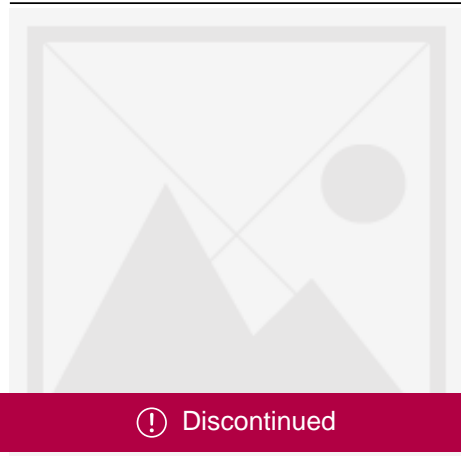

⚠ Discontinued

8501XO1000V04 has not been replaced. Please contact your customer care center for more information.

### Main

Range	8501X
Relay Type	Control
Product	Relay
Current Rating	10 A AC 5 A DC

### Complementary

Coil Voltage	277 V AC 60 Hz
Control circuit voltage limits	0.85...1.1 Uc operational AC 60 Hz
Rated breaking capacity	6 A at: 120 V AC for inductive load control circuit per UL 508 3 A at: 240 V AC for inductive load control circuit per UL 508 1.5 A at: 480 V AC for inductive load control circuit per UL 508 1.2 A at: 600 V AC for inductive load control circuit per UL 508 10 A at: <= 600 V AC for resistive load control circuit per UL 508 1.1 A at: 125 V DC for inductive load control circuit per UL 508 0.55 A at: 250 V DC for inductive load control circuit per UL 508 0.2 A at: 301...600 V DC for inductive load control circuit per UL 508 4 A at: 125 V DC for resistive load control circuit per UL 508 0.8 A at: 250 V DC for resistive load control circuit per UL 508
[Icm] rated short-circuit making capacity	60 A at: 120 V AC for inductive load control circuit per UL 508 30 A at: 240 V AC for inductive load control circuit per UL 508 15 A at: 480 V AC for inductive load control circuit per UL 508 12 A at: 600 V AC for inductive load control circuit per UL 508 10 A at: <= 600 V AC for resistive load control circuit per UL 508 1.1 A at: 125 V DC for inductive load control circuit per UL 508 0.55 A at: 250 V DC for inductive load control circuit per UL 508 0.2 A at: 301...600 V DC for inductive load control circuit per UL 508 4 A at: 125 V DC for inductive load control circuit per UL 508 0.8 A at: 250 V DC for resistive load control circuit per UL 508
Inrush power in VA	148 VA 60 Hz
Hold-in power consumption in VA	23 VA 60 Hz
Operating time	15 ms pick-up 16 ms drop-out

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Contact Configuration	10 NO 10 standard contact cartridges
Electrical connection	Screw clamp terminals
AWG gauge	AWG 18...AWG 12 copper
Tightening torque	1.02...1.36 N.m control circuit screw terminals
Mounting Type	Panel
Height	3.5 in
Width	2.23 in
Depth	6.36 in

## Environment

Operating Temperature	-40...160 °F
Certifications	UL listed file E78403 CCN NKCR CSA LR60905 class 3211 03

## Ordering and shipping details

Category	21158 - 8501 XO (AC)
Discount Schedule	CP2
Nbr. of units in pkg.	1
Package weight(Lbs)	2.7000000000000002
Returnability	N
Country of origin	MX

## Offer Sustainability

RoHS (date code: YYWW)	Will be compliant on 3Q2014 <a href="#">Will be compliant on 3Q2014</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>

## Contractual warranty

Warranty period	18 months
-----------------	-----------