
# Product data sheet

Specifications

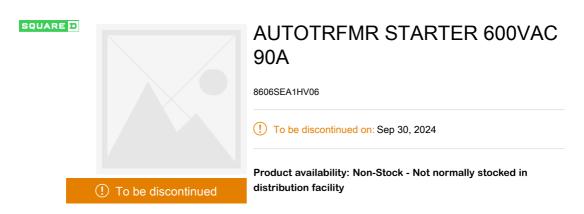

#### Main

Device Short Name

# Complementary

s

[Ue] Rated Operational Voltage480 V AC[Uc] Control Circuit Voltage480 V ACDepth16 in (406.40 mm)Device MountingSurfaceHeight70 in (1778.00 mm)Maximum Horse Power Rating40 hpNema Size3Number Of Poles3Number Of Thermal Units Required3Net Weight490 lb(US) (222.26 kg)Width32 in (812.80 mm)		
Depth 16 in (406.40 mm)   Device Mounting Surface   Height 70 in (1778.00 mm)   Maximum Horse Power Rating 40 hp   Nema Size 3   Number Of Poles 3   Number Of Thermal Units 3   Required 490 lb(US) (222.26 kg)	[Ue] Rated Operational Voltage	480 V AC
Device Mounting Surface   Height 70 in (1778.00 mm)   Maximum Horse Power Rating 40 hp   Nema Size 3   Number Of Poles 3   Number Of Thermal Units 3   Required 490 lb(US) (222.26 kg)	[Uc] Control Circuit Voltage	480 V AC
Height   70 in (1778.00 mm)     Maximum Horse Power Rating   40 hp     Nema Size   3     Number Of Poles   3     Number Of Thermal Units   3     Required   490 lb(US) (222.26 kg)	Depth	16 in (406.40 mm)
Maximum Horse Power Rating 40 hp   Nema Size 3   Number Of Poles 3   Number Of Thermal Units 3   Required 490 lb(US) (222.26 kg)	Device Mounting	Surface
Nema Size 3   Number Of Poles 3   Number Of Thermal Units 3   Required 490 lb(US) (222.26 kg)	Height	70 in (1778.00 mm)
Number Of Poles 3   Number Of Thermal Units 3   Required 490 lb(US) (222.26 kg)	Maximum Horse Power Rating	40 hp
Number Of Thermal Units 3   Required 490 lb(US) (222.26 kg)	Nema Size	3
Required       Net Weight     490 lb(US) (222.26 kg)	Number Of Poles	3
		3
Width 32 in (812.80 mm)	Net Weight	490 lb(US) (222.26 kg)
	Width	32 in (812.80 mm)

#### Environment

Nema Degree Of Protection	NEMA 12
Product Certifications	UL listed file E70074 CCN NLDX

### Ordering and shipping details

Category	21231 - 8606 (NOT S*K)
Discount Schedule	CP1
Returnability	No
Country Of Origin	MX

## **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	70.00 in (177.8 cm)
Package 1 Width	32.01 in (81.3 cm)
Package 1 Length	15.98 in (40.6 cm)

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Package 1 Weight

525.00 lb(US) (238.136 kg)

2

#### **Sustainability**

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >

Eu Rohs Directive	Not compliant
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to www.p65warnings.ca.gov