

# Product data sheet

Specifications



AC servo motor BSH, Lexium 05,  
5.5N.m, 4000rpm, untapped shaft,  
without brake, IP65

BSH1002T21A2A

Product availability: Non-Stock - Not normally stocked in  
distribution facility

Price\*: 2,317.50 USD

## Main

Product Or Component Type	Servo motor
Device Short Name	BSH
Maximum Mechanical Speed	6000 rpm
Continuous Stall Torque	51.33 lbf.in (5.8 N.m) LXM32.D30M2 10 A, 230 V, single phase 48.68 lbf.in (5.5 N.m) LXM15LD28M3, 230 V, three phase 48.68 lbf.in (5.5 N.m) LXM05AD42M3X, 200...240 V, three phase 48.68 lbf.in (5.5 N.m) LXM05BD42M3X, 200...240 V, three phase 48.68 lbf.in (5.5 N.m) LXM05CD42M3X, 200...240 V, three phase
Peak Stall Torque	145.15 lbf.in (16.4 N.m) LXM32.D30M2 10 A, 230 V, single phase 102.58 lbf.in (11.59 N.m) LXM15LD28M3, 230 V, three phase 141.61 lbf.in (16 N.m) LXM05AD42M3X, 200...240 V, three phase 141.61 lbf.in (16 N.m) LXM05BD42M3X, 200...240 V, three phase 141.61 lbf.in (16 N.m) LXM05CD42M3X, 200...240 V, three phase
Nominal Output Power	1500 W LXM32.D30M2 10 A, 230 V, single phase 1400 W LXM05AD42M3X, 200...240 V, three phase 1400 W LXM05BD42M3X, 200...240 V, three phase 1400 W LXM05CD42M3X, 200...240 V, three phase 1700 W LXM15LD28M3, 230 V, three phase
Nominal Torque	32.75 lbf.in (3.7 N.m) LXM32.D30M2 10 A, 230 V, single phase 35.40 lbf.in (4 N.m) LXM15LD28M3, 230 V, three phase 38.94 lbf.in (4.4 N.m) LXM05AD42M3X, 200...240 V, three phase 38.94 lbf.in (4.4 N.m) LXM05BD42M3X, 200...240 V, three phase 38.94 lbf.in (4.4 N.m) LXM05CD42M3X, 200...240 V, three phase
Nominal Speed	4000 rpm LXM32.D30M2 10 A, 230 V, single phase 3000 rpm LXM05AD42M3X, 200...240 V, three phase 3000 rpm LXM05BD42M3X, 200...240 V, three phase 3000 rpm LXM05CD42M3X, 200...240 V, three phase 4000 rpm LXM15LD28M3, 230 V, three phase
Product Compatibility	LXM32.D30M2 230 V single phase LXM05AD42M3X 200...240 V three phase LXM05BD42M3X 200...240 V three phase LXM05CD42M3X 200...240 V three phase LXM15LD28M3 230 V three phase
Shaft End	Untapped
Ip Degree Of Protection	IP65 standard IP67 with IP67 kit
Speed Feedback Resolution	131072 points/turn
Holding Brake	Without
Mounting Support	International standard flange
Electrical Connection	Rotatable right-angled connectors

## Complementary

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Range Compatibility	Lexium 32 Lexium 15 Lexium 05
Supply Voltage Max	480 V
Phase	Three phase
Continuous Stall Current	9.9 A
Maximum Continuous Power	2.51 W
Maximum Current Irms	31.2 A LXM15LD28M3 35.4 A LXM05AD42M3X 35.4 A LXM05BD42M3X 35.4 A LXM05CD42M3X 30 A LXM32.D30M2
Maximum Permanent Current	35.4 A
Switching Frequency	8 kHz
Second Shaft	Without second shaft end
Shaft Diameter	0.75 in (19 mm)
Shaft Length	1.57 in (40 mm)
Feedback Type	Single turn SinCos Hiperface
Motor Flange Size	3.94 in (100 mm)
Number Of Motor Stacks	2
Torque Constant	0.59 N.m/A 248 °F (120 °C)
Back Emf Constant	37 V/krpm 248 °F (120 °C)
Number Of Motor Poles	8
Rotor Inertia	2.31 kg.cm²
Stator Resistance	0.56 Ohm 68 °F (20 °C)
Stator Inductance	3 mH 68 °F (20 °C)
Stator Electrical Time Constant	5.36 ms 68 °F (20 °C)
Maximum Radial Force Fr	620 N 4000 rpm 690 N 3000 rpm 790 N 2000 rpm 990 N 1000 rpm
Maximum Axial Force Fa	0.2 x Fr
Type Of Cooling	Natural convection
Length	8.05 in (204.5 mm)
Centring Collar Diameter	3.74 in (95 mm)
Centring Collar Depth	0.14 in (3.5 mm)
Number Of Mounting Holes	4
Mounting Holes Diameter	0.35 in (9 mm)
Circle Diameter Of The Mounting Holes	4.53 in (115 mm)
Net Weight	13.01 lb(US) (5.9 kg)

## Ordering and shipping details

Category	US1PC5318282
Discount Schedule	PC53
Gtin	3389118139633

Returnability	No
Country Of Origin	DE

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	6.06 in (15.4 cm)
Package 1 Width	6.42 in (16.3 cm)
Package 1 Length	16.02 in (40.7 cm)
Package 1 Weight	12.79 lb(US) (5.8 kg)

## Contractual warranty

Warranty	18 months
----------	-----------

Sustainability



**Green Premium™ label** is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency   RoHS/REACH

## Well-being performance

✓

Mercury Free

✓

Rohs Exemption Information

Yes

✓

Pvc Free


## Certifications & Standards

Reach Regulation	<a href="#">REACH Declaration</a>
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	No need of specific recycling operations
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

Dimensions Drawings

Servo Motors Dimensions

Example with Straight Connectors

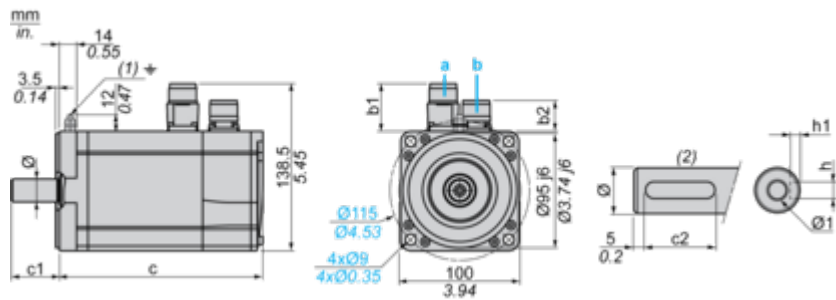

- a: Power supply for servo motor brake  
b: Power supply for servo motor encoder  
(1) M4 screw  
(2) Shaft end, keyed slot (optional)

Dimensions in mm

Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)	c1	c2	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2								
39.5	25.5	39.5	39.5	205	236	40	30	6 N9	3.5 <sup>+0.1</sup> <sub>0</sub>	19 k6	M6 x 16

Dimensions in in.


Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)	c1	c2	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2								
1.55	1.00	1.55	1.55	8.07	9.29	1.57	1.18	0.24 N9	0.14 <sup>+0.1</sup> <sub>0</sub>	0.75 k6	M6 x 0.63

Performance Curves

230 V Single-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D30M2 servo drive

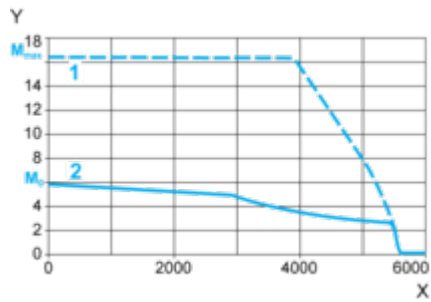

- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque