# **Product data sheet**

Specification





servo motor BSH, Lexium 05, 9.31N.m, 1500rpm, 100mm, untapped shaft, Sincos single turn, without brake, IP50

BSH1004P01A2A

Product availability: Non-Stock - Not normally stocked in distribution facility

Price\*: 1,955.00 USD

### Main

wain	
Product Or Component Type	Servo motor
Device Short Name	BSH
Maximum Mechanical Speed	6000 rpm
Continuous Stall Torque	70.81 lbf.in (8 N.m) LXM32.D30N4 10 A, 400 V, three phase
	70.81 lbf.in (8 N.m) LXM32.D30N4 10 A, 480 V, three phase
	82.40 lbf.in (9.31 N.m) LXM15MD40N4, 400 V, three phase
	82.40 lbf.in (9.31 N.m) LXM15MD40N4, 480 V, three phase
	82.40 lbf.in (9.31 N.m) LXM15MD28M3, 230 V, three phase
	82.40 lbf.in (9.31 N.m) LXM15MD28N4, 230 V, three phase
	82.40 lbf.in (9.31 N.m) LXM15MD28N4, 400 V, three phase
	82.40 lbf.in (9.31 N.m) LXM15MD28N4, 480 V, three phase
	82.40 lbf.in (9.31 N.m) LXM15MD40N4, 230 V, three phase
	82.40 lbf.in (9.31 N.m) LXM05AD34N4, 380480 V, three phase
	82.40 lbf.in (9.31 N.m) LXM05AD42M3X, 200240 V, three phase
	82.40 lbf.in (9.31 N.m) LXM05AD57N4, 380480 V, three phase
	82.40 lbf.in (9.31 N.m) LXM05BD34N4, 380480 V, three phase
	82.40 lbf.in (9.31 N.m) LXM05BD42M3X, 200240 V, three phase
	82.40 lbf.in (9.31 N.m) LXM05BD57N4, 380480 V, three phase
	82.40 lbf.in (9.31 N.m) LXM05CD34N4, 380480 V, three phase
	82.40 lbf.in (9.31 N.m) LXM05CD42M3X, 200240 V, three phase
	82.40 lbf.in (9.31 N.m) LXM05CD57N4, 380480 V, three phase
Peak Stall Torque	335.44 lbf.in (37.9 N.m) LXM32.D30N4 10 A, 400 V, three phase
	335.44 lbf.in (37.9 N.m) LXM32.D30N4 10 A, 480 V, three phase
	227.46 lbf.in (25.7 N.m) LXM15MD28M3, 230 V, three phase
	227.46 lbf.in (25.7 N.m) LXM15MD28N4, 230 V, three phase
	227.46 lbf.in (25.7 N.m) LXM15MD28N4, 400 V, three phase
	227.46 lbf.in (25.7 N.m) LXM15MD28N4, 480 V, three phase
	299.42 lbf.in (33.83 N.m) LXM15MD40N4, 230 V, three phase
	299.42 lbf.in (33.83 N.m) LXM15MD40N4, 400 V, three phase
	299.42 lbf.in (33.83 N.m) LXM15MD40N4, 480 V, three phase
	207.73 lbf.in (23.47 N.m) LXM05AD34N4, 380480 V, three phase
	315.97 lbf.in (35.7 N.m) LXM05AD42M3X, 200240 V, three phase
	315.97 lbf.in (35.7 N.m) LXM05AD57N4, 380480 V, three phase
	207.73 lbf.in (23.47 N.m) LXM05BD34N4, 380480 V, three phase
	315.97 lbf.in (35.7 N.m) LXM05BD42M3X, 200240 V, three phase
	315.97 lbf.in (35.7 N.m) LXM05BD57N4, 380480 V, three phase
	207.73 lbf.in (23.47 N.m) LXM05CD34N4, 380480 V, three phase
	315.97 lbf.in (35.7 N.m) LXM05CD42M3X, 200240 V, three phase

315.97 lbf.in (35.7 N.m) LXM05CD57N4, 380...480 V, three phase

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Nominal Output Power	2600 W LXM32.D30N4 10 A, 480 V, three phase
	2100 W LXM32.D30N4 10 A, 400 V, three phase 1300 W LXM05AD42M3X, 200240 V, three phase
	1300 W LXM05BD42M3X, 200240 V, three phase
	1300 W LXM05CD42M3X, 200240 V, three phase
	1300 W LXM15MD28M3, 230 V, three phase
	1300 W LXM15MD28N4, 230 V, three phase 1300 W LXM15MD40N4, 230 V, three phase
	2200 W LXM05AD34N4, 380480 V, three phase
	2200 W LXM05AD57N4, 380480 V, three phase
	2200 W LXM05BD34N4, 380480 V, three phase
	2200 W LXM05BD57N4, 380480 V, three phase
	2200 W LXM05CD34N4, 380480 V, three phase 2200 W LXM05CD57N4, 380480 V, three phase
	2200 W LXM15MD28N4, 400 V, three phase
	2300 W LXM15MD40N4, 400 V, three phase
	2400 W LXM15MD40N4, 480 V, three phase
	2700 W LXM15MD28N4, 480 V, three phase
Nominal Torque	73.46 lbf.in (8.3 N.m) LXM32.D30N4 10 A, 400 V, three phase
	73.46 lbf.in (8.3 N.m) LXM32.D30N4 10 A, 480 V, three phase
	57.53 lbf.in (6.5 N.m) LXM15MD28N4, 480 V, three phase
	59.21 lbf.in (6.69 N.m) LXM15MD40N4, 480 V, three phase 61.96 lbf.in (7 N.m) LXM15MD28N4, 400 V, three phase
	62.84 lbf.in (7.1 N.m) LXM05AD34N4, 380480 V, three phase
	62.84 lbf.in (7.1 N.m) LXM05AD57N4, 380480 V, three phase
	62.84 lbf.in (7.1 N.m) LXM05BD34N4, 380480 V, three phase
	62.84 lbf.in (7.1 N.m) LXM05BD57N4, 380480 V, three phase
	62.84 lbf.in (7.1 N.m) LXM05CD34N4, 380480 V, three phase 62.84 lbf.in (7.1 N.m) LXM05CD57N4, 380480 V, three phase
	63.46 lbf.in (7.17 N.m) LXM15MD40N4, 400 V, three phase
	72.40 lbf.in (8.18 N.m) LXM15MD40N4, 230 V, three phase
	72.75 lbf.in (8.22 N.m) LXM05AD42M3X, 200240 V, three phase
	72.75 lbf.in (8.22 N.m) LXM05BD42M3X, 200240 V, three phase 72.75 lbf.in (8.22 N.m) LXM05CD42M3X, 200240 V, three phase
	72.75 lbf.in (8.22 N.m) LXM15LD28M3, 230 V, three phase
	72.75 lbf.in (8.22 N.m) LXM15MD28N4, 230 V, three phase
Nominal Speed	2500 rpm LXM32.D30N4 10 A, 400 V, three phase
Nonmar opeca	3000 rpm LXM32.D30N4 10 A, 480 V, three phase
	1500 rpm LXM05AD42M3X, 200240 V, three phase
	1500 rpm LXM05BD42M3X, 200240 V, three phase
	1500 rpm LXM05CD42M3X, 200240 V, three phase
	3000 rpm LXM05AD34N4, 380480 V, three phase 3000 rpm LXM05BD34N4, 380480 V, three phase
	3000 rpm LXM05CD34N4, 380480 V, three phase
	1500 rpm LXM15MD28M3, 230 V, three phase
	1500 rpm LXM15MD28N4, 230 V, three phase
	1500 rpm LXM15MD40N4, 230 V, three phase 3000 rpm LXM05AD57N4, 380480 V, three phase
	3000 rpm LXM05BD57N4, 380480 V, three phase
	3000 rpm LXM05CD57N4, 380480 V, three phase
	3000 rpm LXM15MD28N4, 400 V, three phase
	3000 rpm LXM15MD40N4, 400 V, three phase
	3500 rpm LXM15MD40N4, 480 V, three phase 4000 rpm LXM15MD28N4, 480 V, three phase
Product Compatibility	LXM05AD42M3X 200240 V three phase
	LXM05BD42M3X 200240 V three phase LXM05CD42M3X 200240 V three phase
	LXM05AD34N4 380480 V three phase
	LXM05BD34N4 380480 V three phase
	LXM05CD34N4 380480 V three phase
	LXM15MD28N4 400 V three phase
	LXM15MD28N4 480 V three phase
	LXM15MD40N4 400 V three phase LXM15MD40N4 480 V three phase
	LXM32.D30N4 400 V three phase
	LXM32.D30N4 480 V three phase
	LXM05AD57N4 380480 V three phase
	LXM05BD57N4 380480 V three phase
	LXM05CD57N4 380480 V three phase LXM15MD28M3 230 V three phase
	LXM15MD28N4 230 V three phase
	LXM15MD40N4 230 V three phase
Shaft End	Untapped
Ip Degree Of Protection	IP50 standard

Speed Feedback Resolution	131072 points/turn
Holding Brake	Without
Mounting Support	International standard flange
Electrical Connection	Rotatable right-angled connectors
Complementary	
Range Compatibility	Lexium 32 Lexium 05
	Lexium 15
Supply Voltage Max	480 V
Phase	Three phase
Continuous Stall Current	6.2 A
Maximum Continuous Power	3.64 W
Maximum Current Irms	34.8 A LXM15LD28M3
	34.8 A LXM15MD28N4 34.8 A LXM15MD40N4
	32.3 A LXM05AD42M3X
	32.3 A LXM05AD34N4
	32.3 A LXM05AD57N4 32.3 A LXM05BD42M3X
	32.3 A LXM05BD34N4
	32.3 A LXM05BD57N4 32.3 A LXM05CD42M3X
	32.3 A LXM05CD34N4
	32.3 A LXM05CD57N4
	30 A LXM32.D30N4
Maximum Permanent Current	32.3 A
Switching Frequency	8 kHz
Second Shaft	Without second shaft end
Shaft Diameter	0.94 in (24 mm)
Shaft Length	1.97 in (50 mm)
Feedback Type	Single turn SinCos Hiperface
Motor Flange Size	3.94 in (100 mm)
Number Of Motor Stacks	4
Torque Constant	1.62 N.m/A 248 °F (120 °C)
Back Emf Constant	103 V/krpm 248 °F (120 °C)
Number Of Motor Poles	8
Rotor Inertia	4.22 kg.cm <sup>2</sup>
Stator Resistance	1.81 Ohm 68 °F (20 °C)
Stator Inductance	11.8 mH 68 °F (20 °C)
Stator Electrical Time Constant	6.52 ms 68 °F (20 °C)
Maximum Radial Force Fr	1070 N 1000 rpm 740 N 3000 rpm 850 N 2000 rpm
Maximum Axial Force Fa	0.2 x Fr
Type Of Cooling	Natural convection
Length	10.89 in (276.5 mm)
Centring Collar Diameter	3.74 in (95 mm)
Centring Collar Depth	0.14 in (3.5 mm)

Number Of Mounting Holes	4
Mounting Holes Diameter	0.35 in (9 mm)
Circle Diameter Of The Mounting Holes	4.53 in (115 mm)
Net Weight	20.94 lb(US) (9.5 kg)

# Ordering and shipping details

Category	US1PC5318282				
Discount Schedule	PC53				
Gtin	3389118140400				
Returnability	No				
Country Of Origin	DE				

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	8.07 in (20.5 cm)
Package 1 Width	7.20 in (18.3 cm)
Package 1 Length	22.13 in (56.2 cm)
Package 1 Weight	21.84 lb(US) (9.906 kg)
Unit Type Of Package 2	P06
Number Of Units In Package 2	8
Package 2 Height	30.31 in (77 cm)
Package 2 Width	31.50 in (80 cm)
Package 2 Length	23.62 in (60 cm)
Package 2 Weight	194.40 lb(US) (88.18 kg)

# **Contractual warranty**

Warranty 18 months



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

### Well-being performance



#### **Certifications & Standards**


Reach Regulation	REACh Declaration					
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)					
China Rohs Regulation	China RoHS declaration					
Environmental Disclosure	Product Environmental Profile					
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.					
Circularity Profile	No need of specific recycling operations					
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov					

#### **BSH1004P01A2A**

#### **Dimensions Drawings**

#### **Servo Motors Dimensions**

#### **Example with Straight Connectors**

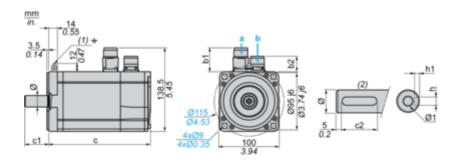

- a: Power supply for servo motor brake
- **b**: Power supply for servo motor encoder
- (1) M4 screw
- (2) Shaft end, keyed slot (optional)

Dimensions in mm

Straight connectors		Rotatable angled connectors		c (without	c (with	c1	c2	h	h1	Ø	Ø1 for
b1	b2	b1	b2	brake)	brake)						screws
39.5	25.5	39.5	39.5	277	308	50	40	8 N9	4 <sup>+0.1</sup> 0	24 k6	M8 x 19

Dimensions in in.

0		Rotatable	·	•	c (with	c1	c2	h	h1	Ø	Ø1 for
b1	b2	b1	b2	brake)	brake)						screws
1.55	1.00	1.55	1.55	10.90	12.12	1.96	1.57	0.31 N9	0.16 <sup>+0.1</sup> <sub>0</sub>	0.94 k6	M8 x 0.75

## **Product data sheet**


## BSH1004P01A2A

#### Performance Curves

## 400 V 3-Phase Supply Voltage

#### **Torque/Speed Curves**

Servo motor with LXM32•D30N4 servo drive




- **X** Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

#### 480 V 3-Phase Supply Voltage

#### **Torque/Speed Curves**

Servo motor with LXM32•D30N4 servo drive



- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque