Product data sheet





AC servo motor BSH, Lexium 05, 9.31N.m, 1500rpm, keyed shaft, with brake, IP65

BSH1004P31F1A

! Discontinued on: Jun 30, 2023

(!) Discontinued

Product availability: Non-Stock - Not normally stocked in distribution facility

Main	
Product Or Component Type	Servo motor
Device Short Name	BSH
Maximum Mechanical Speed	6000 rpm
Continuous Stall Torque	70.81 lbf.in (8 N.m) LXM32.D30N4 10 A, 400 V, three phase 70.81 lbf.in (8 N.m) LXM32.D30N4 10 A, 480 V, three phase 82.40 lbf.in (9.31 N.m) LXM15MD40N4, 400 V, three phase 82.40 lbf.in (9.31 N.m) LXM15MD40N4, 480 V, three phase 82.40 lbf.in (9.31 N.m) LXM15MD28M3, 230 V, three phase 82.40 lbf.in (9.31 N.m) LXM15MD28N4, 230 V, three phase 82.40 lbf.in (9.31 N.m) LXM15MD28N4, 400 V, three phase 82.40 lbf.in (9.31 N.m) LXM15MD28N4, 400 V, three phase 82.40 lbf.in (9.31 N.m) LXM15MD28N4, 480 V, three phase 82.40 lbf.in (9.31 N.m) LXM15MD40N4, 230 V, three phase 82.40 lbf.in (9.31 N.m) LXM05AD34N4, 380480 V, three phase 82.40 lbf.in (9.31 N.m) LXM05AD42M3X, 200240 V, three phase 82.40 lbf.in (9.31 N.m) LXM05BD34N4, 380480 V, three phase 82.40 lbf.in (9.31 N.m) LXM05BD42M3X, 200240 V, three phase 82.40 lbf.in (9.31 N.m) LXM05BD57N4, 380480 V, three phase 82.40 lbf.in (9.31 N.m) LXM05BD57N4, 380480 V, three phase 82.40 lbf.in (9.31 N.m) LXM05BD57N4, 380480 V, three phase 82.40 lbf.in (9.31 N.m) LXM05CD34N4, 380480 V, three phase 82.40 lbf.in (9.31 N.m) LXM05CD34NA, 380480 V, three phase 82.40 lbf.in (9.31 N.m) LXM05CD34NA, 200240 V, three phase
Peak Stall Torque	335.44 lbf.in (37.9 N.m) LXM32.D30N4 10 A, 400 V, three phase 335.44 lbf.in (37.9 N.m) LXM32.D30N4 10 A, 480 V, three phase 227.46 lbf.in (25.7 N.m) LXM15MD28N4, 230 V, three phase 227.46 lbf.in (25.7 N.m) LXM15MD28N4, 230 V, three phase 227.46 lbf.in (25.7 N.m) LXM15MD28N4, 400 V, three phase 227.46 lbf.in (25.7 N.m) LXM15MD28N4, 400 V, three phase 227.46 lbf.in (33.83 N.m) LXM15MD28N4, 480 V, three phase 299.42 lbf.in (33.83 N.m) LXM15MD40N4, 230 V, three phase 299.42 lbf.in (33.83 N.m) LXM15MD40N4, 400 V, three phase 299.42 lbf.in (33.83 N.m) LXM15MD40N4, 400 V, three phase 207.73 lbf.in (23.47 N.m) LXM05AD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05AD57N4, 380480 V, three phase 207.73 lbf.in (23.47 N.m) LXM05BD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05BD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05BD57N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05BD57N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05BD57N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05BD57N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.in (35.7 N.m) LXM05CD34N4, 380480 V, three phase 315.97 lbf.

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Nominal Output Power	2600 W LXM32.D30N4 10 A, 480 V, three phase
	2100 W LXM32.D30N4 10 A, 400 V, three phase
	1300 W LXM05AD42M3X, 200240 V, three phase
	1300 W LXM05BD42M3X, 200240 V, three phase
	1300 W LXM05CD42M3X, 200240 V, three phase
	1300 W LXM15MD28M3, 230 V, three phase
	1300 W LXM15MD28N4, 230 V, three phase 1300 W LXM15MD40N4, 230 V, three phase
	2200 W LXM05AD34N4, 380480 V, three phase
	2200 W LXM05AD57N4, 380480 V, three phase
	2200 W LXM05BD34N4, 380480 V, three phase
	2200 W LXM05BD57N4, 380480 V, three phase
	2200 W LXM05CD34N4, 380480 V, three phase
	2200 W LXM05CD57N4, 380480 V, three phase
	2200 W LXM15MD28N4, 400 V, three phase
	2300 W LXM15MD40N4, 400 V, three phase
	2400 W LXM15MD40N4, 480 V, three phase
	2700 W LXM15MD28N4, 480 V, three phase
Nominal Torque	73.46 lbf.in (8.3 N.m) LXM32.D30N4 10 A, 400 V, three phase
·	73.46 lbf.in (8.3 N.m) LXM32.D30N4 10 A, 480 V, three phase
	57.53 lbf.in (6.5 N.m) LXM15MD28N4, 480 V, three phase
	59.21 lbf.in (6.69 N.m) LXM15MD40N4, 480 V, three phase
	61.96 lbf.in (7 N.m) LXM15MD28N4, 400 V, three phase
	62.84 lbf.in (7.1 N.m) LXM05AD34N4, 380480 V, three phase
	62.84 lbf.in (7.1 N.m) LXM05AD57N4, 380480 V, three phase
	62.84 lbf.in (7.1 N.m) LXM05BD34N4, 380480 V, three phase
	62.84 lbf.in (7.1 N.m) LXM05BD57N4, 380480 V, three phase
	62.84 lbf.in (7.1 N.m) LXM05CD34N4, 380480 V, three phase
	62.84 lbf.in (7.1 N.m) LXM05CD57N4, 380480 V, three phase 63.46 lbf.in (7.17 N.m) LXM15MD40N4, 400 V, three phase
	72.40 lbf.in (8.18 N.m) LXM15MD40N4, 430 V, three phase
	72.75 lbf.in (8.22 N.m) LXM05AD42M3X, 200240 V, three phase
	72.75 lbf.in (8.22 N.m) LXM05BD42M3X, 200240 V, three phase
	72.75 lbf.in (8.22 N.m) LXM05CD42M3X, 200240 V, three phase
	72.75 lbf.in (8.22 N.m) LXM15LD28M3, 230 V, three phase
	72.75 lbf.in (8.22 N.m) LXM15MD28N4, 230 V, three phase
Nominal Speed	2500 rpm LXM32.D30N4 10 A, 400 V, three phase
Trommar Cp sou	3000 rpm LXM32.D30N4 10 A, 480 V, three phase
	1500 rpm LXM05AD42M3X, 200240 V, three phase
	1500 rpm LXM05BD42M3X, 200240 V, three phase
	1500 rpm LXM05CD42M3X, 200240 V, three phase
	3000 rpm LXM05AD34N4, 380480 V, three phase
	3000 rpm LXM05BD34N4, 380480 V, three phase
	3000 rpm LXM05CD34N4, 380480 V, three phase
	1500 rpm LXM15MD28M3, 230 V, three phase
	1500 rpm LXM15MD28N4, 230 V, three phase
	1500 rpm LXM15MD40N4, 230 V, three phase 3000 rpm LXM05AD57N4, 380480 V, three phase
	3000 rpm LXM05BD57N4, 380480 V, three phase
	3000 rpm LXM05CD57N4, 380480 V, three phase
	3000 rpm LXM15MD28N4, 400 V, three phase
	3000 rpm LXM15MD40N4, 400 V, three phase
	3500 rpm LXM15MD40N4, 480 V, three phase
	4000 rpm LXM15MD28N4, 480 V, three phase
Product Compatibility	LVM05AD42M2V 200 - 240 V/4bree above
. Todaot Companimity	LXM05AD42M3X 200240 V three phase LXM05BD42M3X 200240 V three phase
	LXM05CD42M3X 200240 V three phase
	LXM05AD34N4 380480 V three phase
	LXM05BD34N4 380480 V three phase
	LXM05CD34N4 380480 V three phase
	LXM15MD28N4 400 V three phase
	LXM15MD28N4 480 V three phase
	LXM15MD40N4 400 V three phase
	LXM15MD40N4 480 V three phase
	LXM32.D30N4 400 V three phase
	LXM32.D30N4 480 V three phase
	LXM05AD57N4 380480 V three phase
	LXM05BD57N4 380480 V three phase
	LXM05CD57N4 380480 V three phase LXM15MD28M3 230 V three phase
	LXM15MD28N4 230 V three phase
	LXM15MD40N4 230 V three phase
	•

Keyed

Shaft End

Ip Degree Of Protection	IP65 standard IP67 with IP67 kit
Speed Feedback Resolution	131072 points/turn
Holding Brake	With
Mounting Support	International standard flange
Electrical Connection	Straight connectors
Complementary	
Range Compatibility	Lexium 32 Lexium 15 Lexium 05
Supply Voltage Max	480 V
Phase	Three phase
Continuous Stall Current	6.2 A
Maximum Continuous Power	3.64 W
Maximum Current Irms	34.8 A LXM15LD28M3 34.8 A LXM15MD28N4 34.8 A LXM15MD40N4 32.3 A LXM05AD42M3X 32.3 A LXM05AD34N4 32.3 A LXM05AD57N4 32.3 A LXM05BD42M3X 32.3 A LXM05BD57N4 32.3 A LXM05BD57N4 32.3 A LXM05CD42M3X 32.3 A LXM05CD57N4 32.3 A LXM05CD42M3X 32.3 A LXM05CD42M3X 32.3 A LXM05CD34N4 32.3 A LXM05CD34N4
Maximum Permanent Current	32.3 A
Maximum Permanent Current Switching Frequency	32.3 A 8 kHz
Switching Frequency	8 kHz
Switching Frequency Second Shaft	8 kHz Without second shaft end
Switching Frequency Second Shaft Shaft Diameter	8 kHz Without second shaft end 0.94 in (24 mm)
Switching Frequency Second Shaft Shaft Diameter Shaft Length	8 kHz Without second shaft end 0.94 in (24 mm) 1.97 in (50 mm)
Switching Frequency Second Shaft Shaft Diameter Shaft Length Key Width	8 kHz Without second shaft end 0.94 in (24 mm) 1.97 in (50 mm) 1.57 in (40 mm)
Switching Frequency Second Shaft Shaft Diameter Shaft Length Key Width Feedback Type	8 kHz Without second shaft end 0.94 in (24 mm) 1.97 in (50 mm) 1.57 in (40 mm) Single turn SinCos Hiperface
Switching Frequency Second Shaft Shaft Diameter Shaft Length Key Width Feedback Type Holding Torque	8 kHz Without second shaft end 0.94 in (24 mm) 1.97 in (50 mm) 1.57 in (40 mm) Single turn SinCos Hiperface 106.21 lbf.in (12 N.m) holding brake
Switching Frequency Second Shaft Shaft Diameter Shaft Length Key Width Feedback Type Holding Torque Motor Flange Size	8 kHz Without second shaft end 0.94 in (24 mm) 1.97 in (50 mm) 1.57 in (40 mm) Single turn SinCos Hiperface 106.21 lbf.in (12 N.m) holding brake 3.94 in (100 mm)
Switching Frequency Second Shaft Shaft Diameter Shaft Length Key Width Feedback Type Holding Torque Motor Flange Size Number Of Motor Stacks	8 kHz Without second shaft end 0.94 in (24 mm) 1.97 in (50 mm) 1.57 in (40 mm) Single turn SinCos Hiperface 106.21 lbf.in (12 N.m) holding brake 3.94 in (100 mm)
Switching Frequency Second Shaft Shaft Diameter Shaft Length Key Width Feedback Type Holding Torque Motor Flange Size Number Of Motor Stacks Torque Constant	8 kHz Without second shaft end 0.94 in (24 mm) 1.97 in (50 mm) 1.57 in (40 mm) Single turn SinCos Hiperface 106.21 lbf.in (12 N.m) holding brake 3.94 in (100 mm) 4 1.62 N.m/A 248 °F (120 °C)
Switching Frequency Second Shaft Shaft Diameter Shaft Length Key Width Feedback Type Holding Torque Motor Flange Size Number Of Motor Stacks Torque Constant Back Emf Constant	8 kHz Without second shaft end 0.94 in (24 mm) 1.97 in (50 mm) 1.57 in (40 mm) Single turn SinCos Hiperface 106.21 lbf.in (12 N.m) holding brake 3.94 in (100 mm) 4 1.62 N.m/A 248 °F (120 °C) 103 V/krpm 248 °F (120 °C)
Switching Frequency Second Shaft Shaft Diameter Shaft Length Key Width Feedback Type Holding Torque Motor Flange Size Number Of Motor Stacks Torque Constant Back Emf Constant Number Of Motor Poles	8 kHz Without second shaft end 0.94 in (24 mm) 1.97 in (50 mm) 1.57 in (40 mm) Single turn SinCos Hiperface 106.21 lbf.in (12 N.m) holding brake 3.94 in (100 mm) 4 1.62 N.m/A 248 °F (120 °C) 103 V/krpm 248 °F (120 °C)
Switching Frequency Second Shaft Shaft Diameter Shaft Length Key Width Feedback Type Holding Torque Motor Flange Size Number Of Motor Stacks Torque Constant Back Emf Constant Number Of Motor Poles Rotor Inertia	8 kHz Without second shaft end 0.94 in (24 mm) 1.97 in (50 mm) 1.57 in (40 mm) Single turn SinCos Hiperface 106.21 lbf.in (12 N.m) holding brake 3.94 in (100 mm) 4 1.62 N.m/A 248 °F (120 °C) 103 V/krpm 248 °F (120 °C) 8 5.245 kg.cm²
Switching Frequency Second Shaft Shaft Diameter Shaft Length Key Width Feedback Type Holding Torque Motor Flange Size Number Of Motor Stacks Torque Constant Back Emf Constant Number Of Motor Poles Rotor Inertia Stator Resistance	8 kHz Without second shaft end 0.94 in (24 mm) 1.97 in (50 mm) 1.57 in (40 mm) Single turn SinCos Hiperface 106.21 lbf.in (12 N.m) holding brake 3.94 in (100 mm) 4 1.62 N.m/A 248 °F (120 °C) 103 V/krpm 248 °F (120 °C) 8 5.245 kg.cm² 1.81 Ohm 68 °F (20 °C)
Switching Frequency Second Shaft Shaft Diameter Shaft Length Key Width Feedback Type Holding Torque Motor Flange Size Number Of Motor Stacks Torque Constant Back Emf Constant Number Of Motor Poles Rotor Inertia Stator Resistance Stator Inductance	8 kHz Without second shaft end 0.94 in (24 mm) 1.97 in (50 mm) 1.57 in (40 mm) Single turn SinCos Hiperface 106.21 lbf.in (12 N.m) holding brake 3.94 in (100 mm) 4 1.62 N.m/A 248 °F (120 °C) 103 V/krpm 248 °F (120 °C) 8 5.245 kg.cm² 1.81 Ohm 68 °F (20 °C) 11.8 mH 68 °F (20 °C)

Brake Pull-In Power	17 W
Type Of Cooling	Natural convection
Length	12.11 in (307.5 mm)
Centring Collar Diameter	3.74 in (95 mm)
Centring Collar Depth	0.14 in (3.5 mm)
Number Of Mounting Holes	4
Mounting Holes Diameter	0.35 in (9 mm)
Circle Diameter Of The Mounting Holes	4.53 in (115 mm)
Net Weight	21.83 lb(US) (9.9 kg)

Ordering and shipping details

Category	US1PC5318282
Discount Schedule	PC53
Gtin	3389118140622
Returnability	No
Country Of Origin	DE

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	7.20 in (18.3 cm)
Package 1 Width	6.42 in (16.3 cm)
Package 1 Length	19.37 in (49.2 cm)
Package 1 Weight	17.97 lb(US) (8.15 kg)

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards


Reach Regulation	REACh Declaration					
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)					
China Rohs Regulation	China RoHS declaration					
Environmental Disclosure	Product Environmental Profile					
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.					
Circularity Profile	No need of specific recycling operations					
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov					

BSH1004P31F1A

Dimensions Drawings

Servo Motors Dimensions

Example with Straight Connectors

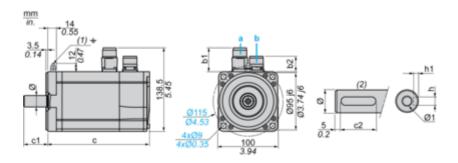

- a: Power supply for servo motor brake
- **b**: Power supply for servo motor encoder
- (1) M4 screw
- (2) Shaft end, keyed slot (optional)

Dimensions in mm

Straight connectors		Rotatable angled connectors		c (without brake)	c (with brake)	c1	c2	h	h1	Ø	Ø1 for screws
b1 39.5	b2 25.5	b1 39.5	b2 39.5	277	308	50	40	8	4 ^{+0.1} 0	24	M8 x 19
00.0	20.0	00.0	00.0	211			10	N9	. 0	k6	MOX 10

Dimensions in in.

Straight connectors		Rotatable angled connectors		c (without	c (with	c1	c2	h	h1	Ø	Ø1 for
b1	b2	b1	b2	brake)	brake)						screws
1.55	1.00	1.55	1.55	10.90	12.12	1.96	1.57	0.31 N9	0.16 ^{+0.1} ₀	0.94 k6	M8 x 0.75

Product data sheet


BSH1004P31F1A

Performance Curves

400 V 3-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D30N4 servo drive




- **X** Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

BSH1004P31F1A

480 V 3-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D30N4 servo drive



- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque