# Product data sheet

Specifications





## gearbox straight teeth GBX, Lexium, 60mm, reduction 60:1, 15arc.min, 44N.m

GBX060060K

Product availability: Non-Stock - Not normally stocked in distribution facility

#### Price\*: 714.83 USD

### Main

Range Compatibility	Lexium 52 Lexium 62 Lexium 62 ILM Lexium 32					
Product Or Component Type	Planetary gearbox					
Gear Box Type	Straight teeth					
Device Short Name	GBX					
Product Compatibility	ILE ILS ILA SH3 MH3 ILM					
Gearbox External Diameter	2.36 in (60 mm)					
Reduction Ratio	60:1					

### Complementary

Maximum Torsional Backlash	15 arc.min					
Torsional Rigidity	2.5 N.m/arcmin					
Housing Colour	Black					
Housing Material	Black anodized aluminium					
Shaft Material	C 45					
Additional Information	Lubricated for life					
Service Life In Hours	30000 h 100 rpm 86 °F (30 °C)					
Mounting Position	Any position					
Efficiency	90 %					
Maximum Radial Force Fr	340 N 100 rpm, force applied at mid-distance from output shaft during 30000 hour at 30 $^\circ\text{C}$					
Maximum Axial Force Fa	450 N 100 rpm, during 30000 hour at 30°C					
Moment Of Inertia	0.076 kg.cm <sup>2</sup>					
Continuous Output Torque	389.43 lbf.in (44 N.m) 100 rpm 86 °F (30 °C)					
Maximum Output Torque	619.55 lbf.in (70 N.m) 100 rpm 86 °F (30 °C)					
Net Weight	2.87 lb(US) (1.3 kg)					
Input Diameter	0.55 in (14.0 mm)					

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

### Environment

Noise Level	58 dB 1 m, no-load		
Ip Degree Of Protection	Shaft output IP54		
Ambient Temperature For Operation	-13194 °F (-2590 °C)		

### Ordering and shipping details

Category	US1PC5318283					
Discount Schedule	PC53					
Gtin	3606480388309					
Returnability	No					
Country Of Origin	DE					

## **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.76 in (7.0 cm)
Package 1 Width	2.76 in (7.0 cm)
Package 1 Length	6.10 in (15.5 cm)
Package 1 Weight	2.64 lb(US) (1.198 kg)
Unit Type Of Package 2	S02
Number Of Units In Package 2	5
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	14.05 lb(US) (6.374 kg)

### **Contractual warranty**

Warranty

18 months

## Sustainability Screen

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

#### Well-being performance

Mercury Free
Rohs Exemption Information Yes
Pvc Free


#### **Certifications & Standards**

Reach Regulation	REACh Declaration				
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)				
China Rohs Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.				
Environmental Disclosure	Product Environmental Profile				
Circularity Profile	No need of specific recycling operations				
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov				

### Product data sheet

#### **Dimensions Drawings**

#### **Dimensions with Servo Motor Adaptation Kit**

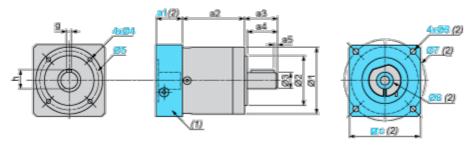

(1) GBK adaptation kit

(2) GBK adaptation kit related dimensions a1, c, Ø6, Ø7, Ø8 depend on the gearbox and servo motor combination

Ø8 shaft end adaptor in case motor shaft diameter is smaller than gearbox input coupling diameter

Values in mm

a2	a3	a4	a5	h	g	Ø1	Ø2	Ø3	Ø4	Ø5
80.5	35	30	2.5	16	5	60	40 h7	14 h7	M5 x 8	52

Values in in.

a2	a3	a4	a5	h	g	Ø1	Ø2	Ø3	Ø4	Ø5
3.17	1.38	1.18	0.10	063	0.19	2.36	1.57 h7	0.55 h7	M5 x 0.31	2.05