

# Product data sheet

Specifications



## TeSys GV7 Manual Starter and Protector, thermal magnetic circuit protector, rocker lever, 3 P, AC-3, 48...80 A

GV7RE80

❗ Discontinued

❗ Discontinued on: Jan 23, 2021

Product availability: Non-Stock - Not normally stocked in distribution facility

### Main

Range	TeSys
Product Name	TeSys GV7
Product Or Component Type	Circuit breaker
Device Short Name	GV7R
Device Application	Motor
Poles Description	3P
Network Type	AC
Utilisation Category	AC-3 IEC 60947-4-1
Network Frequency	50/60 Hz IEC 60947-4-1
Breaking Capacity	35 kA Icu 440 V AC 50/60 Hz IEC 60947-2 85 kA Icu 220/240 V AC 50/60 Hz IEC 60947-2 36 kA Icu 380/415 V AC 50/60 Hz IEC 60947-2 25 kA Icu 500 V AC 50/60 Hz IEC 60947-2 8 kA Icu 660/690 V AC 50/60 Hz IEC 60947-2
[Ics] Rated Service Short-Circuit Breaking Capacity	100 % 440 V AC 50/60 Hz IEC 60947-2 100 % 220/240 V AC 50/60 Hz IEC 60947-2 100 % 380/415 V AC 50/60 Hz IEC 60947-2 50 % 500 V AC 50/60 Hz IEC 60947-2 50 % 660/690 V AC 50/60 Hz IEC 60947-2
Thermal Protection Adjustment Range	48...80 A
Trip Unit Technology	Thermal-magnetic

### Complementary

Mounting Mode	By screws By clips
Mounting Support	Kit for fixing the switchgear Rail Panel mounting Flush
Mounting Position	Vertical
Motor Power Kw	37 kW 400...415 V AC 50/60 Hz 45 kW 500 V AC 50/60 Hz 55 kW 500 V AC 50/60 Hz 55 kW 660...690 V AC 50/60 Hz
Control Type	Rocker lever
[Ue] Rated Operational Voltage	690 V AC 50/60 Hz IEC 60947-2

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Ui] Rated Insulation Voltage	750 V AC 50/60 Hz IEC 60947-2
[Ith] Conventional Free Air Thermal Current	80 A IEC 60947-4-1
[Uimp] Rated Impulse Withstand Voltage	8 kV IEC 60947-2
Power Dissipation Per Pole	5 W
Power Dissipation Per Pole	5 W
Mechanical Durability	50000 cycles
Electrical Durability	30000 cycles AC-3 440 V In 50000 cycles AC-3 440 V In/2
Maximum Operating Rate	25 cyc/h
Rated Duty	Continuous IEC 60947-4-1
Connection Pitch	1.38 in (35 mm) without spreaders 1.77 in (45 mm) with spreaders
Connections - Terminals	Bars Cable with lug - external diameter: 0.39 in (10 mm) Screw Bare cable connectors 0.00...0.15 in² (1.5...95 mm²)
Tightening Torque	88.51 lbf.in (10 N.m) screw M6 132.76 lbf.in (15 N.m) bare cable connectors 0.00...0.15 in² (1.5...95 mm²)
Mechanical Robustness	Shocks 15 Gn for 11 ms IEC 60068-2-27 Vibrations 2.5 Gn, 0...25 Hz IEC 60068-2-6
Suitability For Isolation	Yes IEC 60947-1
Phase Failure Sensitivity	Yes IEC 60947-4-1 § 7-2-1-5-2
Height	6.34 in (161 mm)
Width	4.13 in (105 mm)
Depth	4.37 in (111 mm)
Net Weight	4.50 lb(US) (2.04 kg)

## Environment

Standards	VDE 0660 NF C 63-650 EN/IEC 60947-4-1 NF C 63-120 NF C 79-130 VDE 0113 EN/IEC 60947-2 EN/IEC 60947-1
Product Certifications	DNV UL
Protective Treatment	TC
Ip Degree Of Protection	IP405 IEC 60529 with terminal shrouds)
Pollution Degree	3
Ambient Air Temperature For Operation	-13...158 °F (-25...70 °C)
Ambient Air Temperature For Storage	-67...203 °F (-55...95 °C)
Fire Resistance	1760 °F (960 °C) IEC 60695-2-1
Operating Altitude	6561.68 ft (2000 m)

## Ordering and shipping details

Category	US10I1122366
----------	--------------

Discount Schedule	0I11
Gtin	3389110566826
Returnability	No
Country Of Origin	CN

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.53 in (11.5 cm)
Package 1 Width	5.51 in (14 cm)
Package 1 Length	6.89 in (17.5 cm)
Package 1 Weight	4.26 lb(US) (1.934 kg)

## Contractual warranty

Warranty	18 months
----------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency

**Eu Rohs Directive**

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)


**Environmental Disclosure**

[Product Environmental Profile](#)

Dimensions Drawings


GV7R

Dimensions

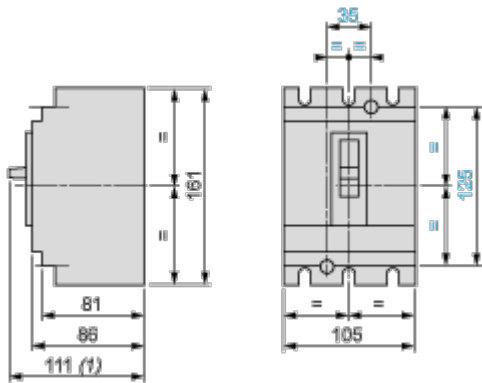

(1) 126 for GV7R<sub>220</sub>.


Minimum Electrical Clearance

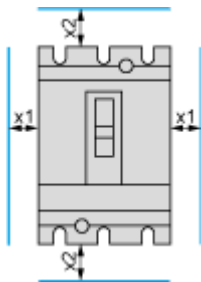


		x1	x2
Painted or insulated metal plate, insulation or insulated bar		0	30
Bare metal plate	$U \leq 440 \text{ V}$	5	35
	$440 \text{ V} < U < 600 \text{ V}$	10	35
	$U \geq 600 \text{ V}$	20	35

GV7R


Panel Mounting

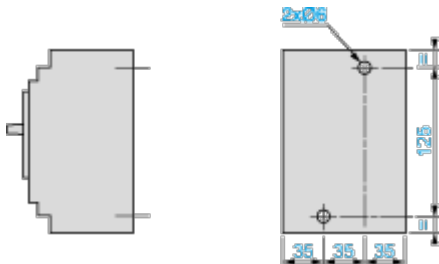


Mounting on 2 Mounting Rails DZ5 MB201

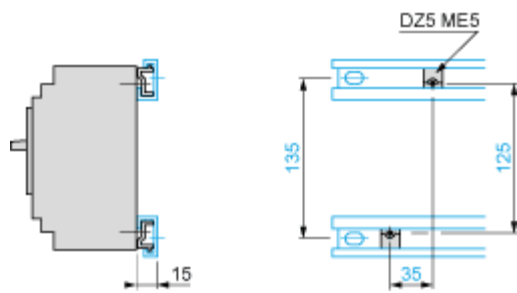


Flush-Mounting

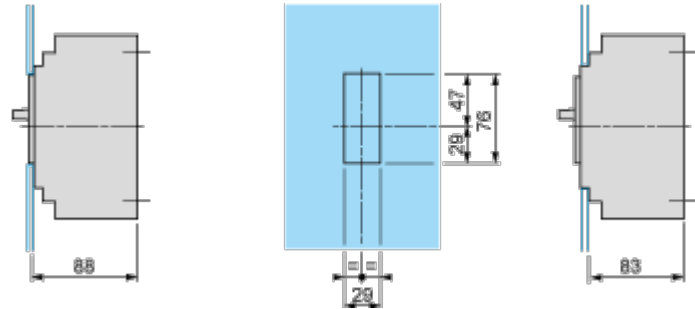


1 circuit breaker GV7R




n circuit breakers GV7R side by side



Connection




Smooth terminals



	a
GV7R <sub>•</sub> 40...R <sub>•</sub> 150	19.5
GV7R <sub>•</sub> 220	21.5

Connectors



Connections and Schema

Motor Circuit Breakers  
GV7 R

