

Product data sheet

Specifications



body for BCD encoded output switch - 1 pole - 30° - 12 A - for Ø 22 mm

K1D008B

Discontinued

Discontinued on: Dec 2, 2020

End-of-service on: Dec 31, 2020

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

| | |
|---|--|
| Range Of Product | Harmony K |
| Product Or Component Type | Cam switch body |
| Component Name | K1 |
| [Ith] Conventional Free Air Thermal Current | 12 A |
| Sub-Assembly Composition | Contact blocks + fixing plate |
| Cam Switch Function | BCD encoded output switch |
| Off Position | With Off position |
| Switching Positions | Right: 0° - 30° - 60° - 90° - 120° - 150° - 180° - 210° - 240° |
| Mounting Location | Front |
| Fixing Mode | Ø 22 mm hole |
| Bezel Material | Plastic |

Complementary

| | |
|--|---|
| Number Of Decimal | 8 |
| Switching Angle | 30 ° |
| [Ui] Rated Insulation Voltage | 690 V 3)IEC 60947-1 |
| [Ithe] Conventional Enclosed Thermal Current | 10 A |
| Rated Operational Power In W | 10500 W AC-21, 500 - 660 V 3 phase IEC 947-3 1100 W AC-3, 230 V 3 phase IEC 947-3 1500 W AC-23A, 230 V 3 phase IEC 947-3 1500 W AC-3, 400 V 1 phase IEC 947-3 1500 W AC-3, 400 V 3 phase IEC 947-3 1500 W AC-3, 500 V 3 phase IEC 947-3 1500 W AC-3, 690 V 3 phase IEC 947-3 2200 W AC-23A, 400 V 3 phase IEC 947-3 2200 W AC-23A, 500 V 3 phase IEC 947-3 2200 W AC-23A, 690 V 3 phase IEC 947-3 4800 W AC-21, 230 V 3 phase IEC 947-3 600 W AC-3, 230 V 1 phase IEC 947-3 8300 W AC-21, 400 V 3 phase IEC 947-3 |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|--|---|
| [Ie] Rated Operational Current Ac | 1.8 A 690 V AC-3 3 phase IEC 947-3 2.8 A 500 V AC-3 3 phase IEC 947-3 2.8 A 690 V AC-23A 3 phase IEC 947-3 3.3 A 400 V AC-3 3 phase IEC 947-3 3.8 A 500 V AC-23A 3 phase IEC 947-3 4.6 A 230 V AC-3 3 phase IEC 947-3 4.8 A 400 V AC-23A 3 phase IEC 947-3 5.6 A 230 V AC-23A 3 phase IEC 947-3 1 A 500 V AC-15 IEC 947-5-1 2 A 400 V AC-15 IEC 947-5-1 3 A 230 V AC-15 IEC 947-5-1 |
| Electrical Durability | 1000000 cycles AC-15 1000000 cycles AC-21 500000 cycles AC-23 500000 cycles AC-3 |
| Maximum Operating Rate | 2.5 cyc/mn AC-21 2.5 cyc/mn AC-23 2.5 cyc/mn AC-3 8.333 cyc/mn AC-15 |
| Short-Circuit Current | 10000 A |
| Short-Circuit Protection | 16 A cartridge fuse gG |
| [Uimp] Rated Impulse Withstand Voltage | 4 kV in isolating function 6 kV IEC 947-1 |
| Contact Operation | Slow-break |
| Positive Opening | With |
| Electrical Connection | Captive screw clamp terminals flexible 2 x 1.5 mm² Captive screw clamp terminals solid 1 x 2.5 mm² |
| Mechanical Durability | 1000000 cycles |
| Net Weight | 0.24 lb(US) (0.11 kg) |

Environment

| | |
|---------------------------------------|---|
| Standards | EN 60947-3 power circuit EN 60947-5-1 control circuit CENELEC EN 50013 |
| Product Certifications | CSA 240 V 1 hp 1 phase CSA 240 V 3 hp 3 phase 2 UL 240 V 1 hp 3 phase UL 240 V 0.33 hp 1 phase 2 |
| Protective Treatment | TC |
| Ambient Air Temperature For Operation | -13...131 °F (-25...55 °C) |
| Ambient Air Temperature For Storage | -40...158 °F (-40...70 °C) |
| Shock Resistance | 30 gn IEC 68-2-27 |
| Vibration Resistance | 5 gn 10...150 Hz)IEC 68-2-6 |
| Overvoltage Category | Class II IEC 536 Class II NF C 20-030 |

Ordering and shipping details

| | |
|-------------------|---------------|
| Category | US10CS218406 |
| Discount Schedule | 0CS2 |
| Gtin | 3389110476774 |
| Returnability | No |
| Country Of Origin | CZ |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Sustainability



Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance

| | | |
|---|----------------------------|-----|
| ✓ | Reach Free Of Svhc | |
| ✓ | Toxic Heavy Metal Free | |
| ✓ | Mercury Free | |
| ✓ | Rohs Exemption Information | Yes |


Certifications & Standards

| | |
|---------------------------|--|
| Reach Regulation | REACH Declaration |
| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| China Rohs Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| Weee | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |
| Circularity Profile | No need of specific recycling operations |
| California Proposition 65 | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |

Dimensions Drawings

Body with Plastic Base

Front Mounting by Ø 22 mm/0.87 in. Hole

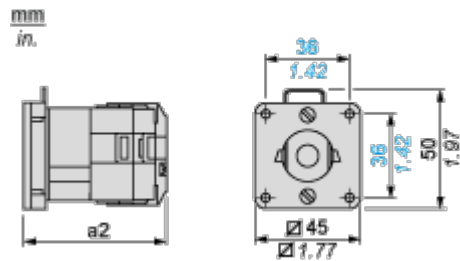


a2 59 mm/2.32 in.

Technical Description


Link Positions (Factory Mounted)

Diagram for 1 to 12-decimal BCD Encoded Ouput Switches


Select the maximum number of decimals according to the product characteristics.

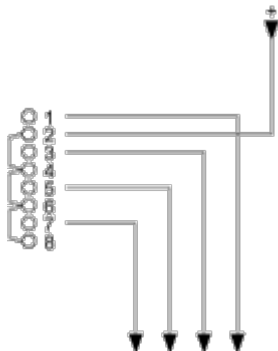

Angular Position of Switch





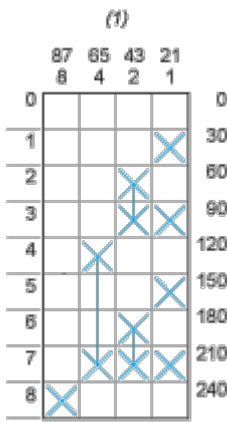


Switching Program



(1) Contact marking value

Convention Used for Switching Program Representation

-  Contact closed
-  Contact closed in 2 positions and maintained between the 2 positions
-  Sealed assembly for auto-maintain control
-  Overlapping contacts
-  Spring return position: for a switching angle of 90°, spring return is over 30° after the last position (for a maximum of 3 simultaneous contacts).

Example:

