

Price* : 45.40 USD



⚠ Discontinued

Main

Range of product	Zelio Time
Product or component type	Modular timing relay
Discrete output type	Solid state
Width pitch dimension	0.69 in (17.5 mm)
Component name	RE11L
Time delay type	A
Time delay range	10...100 h 6...60 s 1...10 s 1...10 h 1...10 min 6...60 min 0.1...1 s
[Us] rated supply voltage	24...240 V AC/DC 50/60 Hz

Complementary

Control type	Selector switch on front panel
Voltage range	0.85...1.1 Us
Nominal output current	0.7 A
Connections - terminals	Screw terminals, clamping capacity: 1 x 4 mm ² without cable end Screw terminals, clamping capacity: 2 x 1.5 mm ² with cable end Screw terminals, clamping capacity: 2 x 2.5 mm ² without cable end
Housing material	Self-extinguishing
Repeat accuracy	+/- 0.5 % conforming to IEC 61812-1
Temperature drift	+/- 0.05 %/°C
Voltage drift	+/- 0.2 %/V
Setting accuracy of time delay	+/- 10 % of full scale at 25 °C conforming to IEC 61812-1
Minimum pulse duration	0.05 s
Reset time	<= 350 ms on de-energisation
On-load factor	100 %
Power consumption in VA	<= 32 VA 240 V
Power consumption in W	<= 0.6 W 24 V <= 1.5 W 240 V
Breaking capacity	0.5 A AC/DC conforming to UL

0.7 A AC/DC at 68 °F (20 °C)

Maximum output current	20 A < 10 ms
Minimum switching current	10 mA
Leakage current	< 5 mA
Maximum switching voltage	250 V
Voltage drop	4 V 3-wire 8 V 2-wire
Electrical durability	100000000 cycles
Mechanical durability	100000000 cycles
Marking	CE
Creepage distance	4 kV/3 conforming to IEC 60664-1
Surge withstand	1 kV (differential mode) conforming to IEC 61000-4-5 level 3 2 kV (common mode) conforming to IEC 61000-4-5 level 3
Mounting support	35 mm symmetrical mounting rail conforming to EN 50022
Product weight	0.13 lb(US) (0.06 kg)

Environment

Immunity to microbreaks	> 10 ms
Derating factor	5 mA/°C
Dielectric strength	2.5 V 1 mA/1 minute conforming to IEC 60255-5 2.5 V 1 mA/1 minute conforming to IEC 60664
Standards	73/23/EEC 93/68/EEC IEC 60669-2-3 EN 50082-1/2 89/336/EEC IEC 61812-1 EN 50081-1/2
Product certifications	CSA cULus
Ambient air temperature for storage	-22...140 °F (-30...60 °C)
Ambient air temperature for operation	-4...140 °F (-20...60 °C)
IP degree of protection	IP20 (terminal block) conforming to IEC 60529 IP40 (housing) conforming to IEC 60529 IP50 (front panel) conforming to IEC 60529
Vibration resistance	0.35 mm (f = 10...55 Hz) conforming to IEC 60068-2-6
Relative humidity	93 % without condensation conforming to IEC 60068-2-3
Resistance to electrostatic discharge	6 kV (in air) conforming to IEC 61000-4-2 level 3 8 kV (in contact) conforming to IEC 61000-4-2 level 3
Resistance to electromagnetic fields	9.14 V/yd (10 V/m), 80 MHz to 1 GHz conforming to ENV 50140/204 level 3 9.14 V/yd (10 V/m), 80 MHz to 1 GHz conforming to IEC 61000-4-3 level 3
Resistance to fast transients	1 kV, capacitive connecting clip conforming to IEC 61000-4-4 level 3 2 kV, direct conforming to IEC 61000-4-4 level 3
Immunity to radioelectric fields	10 V (0.15...80 MHz) conforming to ENV 50141 (IEC 61000-4-6 level 3)
Immunity to voltage dips	30 % / 10 ms conforming to IEC 61000-4-11 60 % / 100 ms conforming to IEC 61000-4-11 95 % / 5 s conforming to IEC 61000-4-11
Disturbance radiated/conducted	Class B conforming to EN 55022 (EN 55011 group 1)


Ordering and shipping details

Category	22370 - RE, RM MISC TIMERS & COUNTERS
Discount Schedule	CP2
GTIN	00785901468943
Nbr. of units in pkg.	1
Package weight(Lbs)	0.14000000000000001
Returnability	N
Country of origin	FR


Contractual warranty

Warranty period	18 months
-----------------	-----------


Width 17.5 mm



Internal Wiring Diagram

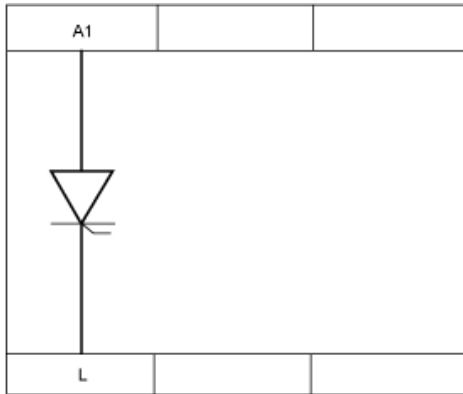

Wiring Diagram



Function A : Power on Delay Relay


Description

The timing period T begins on energisation. After timing, the output(s) R close(s). The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs

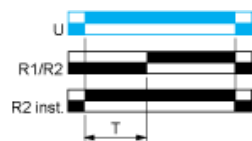

2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Legend

Relay de-energised

Relay energised

Output open

Output closed

C Control contact

G Gate

R Relay or solid state output

R1/R2 2 timed outputs

R2 inst. The second output is instantaneous if the right position is selected

T Timing period

Ta - Adjustable On-delay

Tr - Adjustable Off-delay

U Supply

RE11LAMW is replaced by:



Solid state Output RE17LAMW

on-delay timing relay - 1 s..100 h - 24..240 V AC/DC - solid state output

Qty 1

Reason for Substitution: End of life | Substitution date: 01 January 2017
