Product data sheet

Specification





single function relay, Harmony Timer Relays, 8A, 2CO, 0.05s…300h, on delay and off delay, 24...240V AC DC

RE22R2ACMR

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 72.10 USD

Main

Range Of Product	Harmony Timer Relays
Product Or Component Type	Single function relay
Discrete Output Type	Relay
Device Short Name	RE22
Nominal Output Current	8 A

Complementary

Contacts Type And Composition	1 C/O timed contact, cadmium free 1 C/O timed or instantaneous contact, cadmium free
Time Delay Type	On-delay and off-delay
Time Delay Range	330 h 30300 h 0.051 s 30300 s 0.33 s 10100 s 110 s 330 min 30300 min 330 s
Control Type	Rotary knob Diagnostic button
[Us] Rated Supply Voltage	24240 V AC/DC 50/60 Hz
Release Input Voltage	<= 2.4 V
Voltage Range	0.851.1 Us
Supply Frequency	5060 Hz +/- 5 %
Connections - Terminals	Screw terminals, 1 x 0.51 x 3.3 mm² AWG 20AWG 12) solid without cable end Screw terminals, 2 x 0.52 x 2.5 mm² AWG 20AWG 14) solid without cable end Screw terminals, 1 x 0.21 x 2.5 mm² AWG 24AWG 14) flexible with cable end Screw terminals, 2 x 0.22 x 1.5 mm² AWG 24AWG 16) flexible with cable end
Tightening Torque	5.318.85 lbf.in (0.61 N.m) IEC 60947-1
Housing Material	Self-extinguishing
Repeat Accuracy	+/- 0.5 % IEC 61812-1
Temperature Drift	+/- 0.05 %/°C
Voltage Drift	+/- 0.2 %/V
Setting Accuracy Of Time Delay	+/- 10 % of full scale 25 °C IEC 61812-1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Control Signal Pulse Width	100 ms with load in parallel 30 ms
Insulation Resistance	100 MOhm 500 V DC IEC 60664-1
Recovery Time	120 ms on de-energisation
Immunity To Microbreaks	10 ms
Power Consumption In Va	3 VA 240 V AC
Power Consumption In W	1.5 W 240 V DC
Switching Capacity In Va	2000 VA
Minimum Switching Current	10 mA 5 V DC
Maximum Switching Current	8 A
Maximum Switching Voltage	250 V AC
Electrical Durability	100000 cycles, 8 A at 250 V, AC-1 100000 cycles, 2 A at 24 V, DC-1
Mechanical Durability	10000000 cycles
Rated Impulse Withstand Voltage	5 kV 1.250 μs IEC 60664-1
Power On Delay	100 ms
Creepage Distance	4 kV/3 IEC 60664-1
Overvoltage Category	III IEC 60664-1
Safety Reliability Data	MTTFd = 251.1 years B10d = 230000
Mounting Position	Any position
Mounting Support	35 mm DIN rail conforming to IEC 60715
Status Led	Green LED backlight steady)dial pointer indication Yellow LED steady)output relay energised Yellow LED fast flashing)timing in progress and output relay de-energised Yellow LED slow flashing)timing in progress and output relay energised
Width	0.89 in (22.5 mm)
Net Weight	0.23 lb(US) (0.105 kg)
Number Of Functions	1
Environment	
Dielectric Strength	2.5 kV 1 mA/1 minute 50 Hz between relay output and power supply basic insulation IEC 61812-1
Standards	UL 508 IEC 61812-1
Directives	2004/108/EC - electromagnetic compatibility

Dielectric Strength	2.5 kV 1 mA/1 minute 50 Hz between relay output and power supply basic insulation IEC 61812-1
Standards	UL 508 IEC 61812-1
Directives	2004/108/EC - electromagnetic compatibility 2006/95/EC - low voltage directive
Product Certifications	RCM CCC CSA UL EAC CE
Ambient Air Temperature For Operation	-4140 °F (-2060 °C)
Ambient Air Temperature For Storage	-40158 °F (-4070 °C)
Ip Degree Of Protection	IP40 housing: conforming to IEC 60529 IP50 front face: conforming to IEC 60529 IP20 terminals: conforming to IEC 60529

Pollution Degree	3 IEC 60664-1
Vibration Resistance	20 m/s² 10150 Hz)IEC 60068-2-6
Shock Resistance	15 gn not operating 11 ms IEC 60068-2-27 5 gn in operation 11 ms IEC 60068-2-27
Relative Humidity	95 % 77131 °F (2555 °C)
Electromagnetic Compatibility	Fast transients immunity test - test level: 1 kV level 3 (capacitive connecting clip) conforming to IEC 61000-4-4
	Surge immunity test - test level: 1 kV level 3 (differential mode) conforming to IEC 61000-4-5
	Surge immunity test - test level: 2 kV level 3 (common mode) conforming to IEC 61000-4-5
	Electrostatic discharge - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2
	Electrostatic discharge - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2
	Radiated radio-frequency electromagnetic field immunity test - test level: 10 V/m level 3 (80 MHz1 GHz) conforming to IEC 61000-4-3
	Conducted RF disturbances - test level: 10 V level 3 (0.1580 MHz) conforming to IEC 61000-4-6
	Fast transient bursts - test level: 2 kV level 3 (direct contact) conforming to IEC 61000-4-4
	Immunity to microbreaks and voltage drops - test level: 30 % (500 ms) conforming to IEC 61000-4-11
	Immunity to microbreaks and voltage drops - test level: 100 % (20 ms) conforming to IEC 61000-4-11

Ordering and shipping details

Category	US10CP222376
Discount Schedule	0CP2
Gtin	3606480792519
Returnability	No
Country Of Origin	ID

Packing Units

r doming office	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.23 in (8.2 cm)
Package 1 Width	3.74 in (9.5 cm)
Package 1 Length	1.02 in (2.6 cm)
Package 1 Weight	3.81 oz (108.0 g)
Unit Type Of Package 2	S02
Number Of Units In Package 2	40
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	10.53 lb(US) (4.775 kg)
Unit Type Of Package 3	PAL
Number Of Units In Package 3	640
Package 3 Height	19.69 in (50.0 cm)
Package 3 Width	23.62 in (60.0 cm)
Package 3 Length	31.50 in (80.0 cm)

Package 3 Weight

189.99 lb(US) (86.18 kg)



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information


Yes

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Dimensions

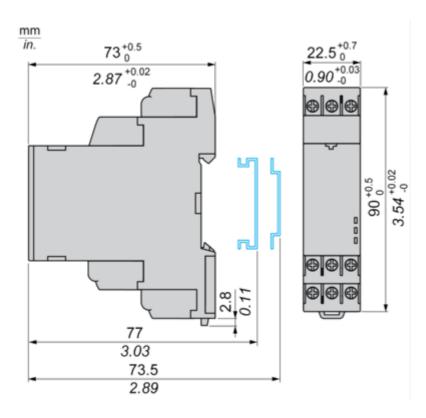


Product data sheet

RE22R2ACMR

Connections and Schema

Wiring Diagram



RE22R2ACMR

Technical Description

Function Ac: On-Delay & Off-Delay with Control Signal

Description

After energisation of power supply and energization of Y1 causes the timing period T to start.


At the end of this timing period, the output(s) R close(s).

When deenergization of Y1, the timing T starts.


At the end of this timing period T,the output(s) R revert(s) to its/their initial position.

The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

Function: 1 Output



Function: 2 Outputs



Legend

	Relay de-energised
	Relay energised
	Output open
	Output closed
U -	Supply
T -	Timing period
R1/R2 -	2 timed outputs
R2 inst	The second output is instantaneous if the right position is selected
Y1 -	Retrigger / Restart control