Product data sheet

Specifications





temperature control relay, Harmony Control Relays, 5A, 1CO, 24..240V AC DC

RM35ATL0MW

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 211.50 USD

Main

Range Of Product Harmony Control Relays Relay Type Temperature control relays Product Or Component Type Elevator machine room temperature control relay Product Specific Application For elevator machine rooms and 3-phase supplies Relay Name RM35AT Relay Monitored Parameters Undertemperature: -111°C Overtemperature: 3446°C Time Delay Range 0.110 s adjustable 010 % of the full scale value) Switching Capacity In Va 1250 VA Minimum Switching Current 10 mA 5 V DC Maximum Power Consumption In Va 3.5 VA AC Utilisation Category AC-12 IEC 60947-5-1 AC-13 IEC 60947-5-1 DC-12 IEC 60947-5-1 DC-12 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-14 IEC 60947-5-1 DC-14 IEC 60947-5-1 Time Delay Adjustable 110 s Tt- time delay upon fault Measurement Range ±/.1.46 °C		
Product Or Component Type Elevator machine room temperature control relay Product Specific Application For elevator machine rooms and 3-phase supplies Relay Name RM35AT Relay Monitored Parameters Undertemperature: -111°C Overtemperature: 3446°C Time Delay Range 0.110 s adjustable 010 % of the full scale value) Switching Capacity In Va 1250 VA Minimum Switching Current 10 mA 5 V DC Maximum Power Consumption In Va 3.5 VA AC Utilisation Category AC-12 IEC 60947-5-1 AC-13 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-14 IEC 60947-5-1 DC-14 IEC 60947-5-1 Time Delay Adjustable 110 s Tt- time delay upon fault	Range Of Product	Harmony Control Relays
Product Specific Application For elevator machine rooms and 3-phase supplies Relay Name RM35AT Relay Monitored Parameters Undertemperature: -111°C Overtemperature: 3446°C Overtemperature: 3446°C Time Delay Range 0.110 s adjustable 010 % of the full scale value) Switching Capacity In Va 1250 VA Minimum Switching Current 10 mA 5 V DC Maximum Power Consumption In Va 3.5 VA AC Va AC-12 IEC 60947-5-1 Va AC-13 IEC 60947-5-1 Utilisation Category AC-12 IEC 60947-5-1 AC-13 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-14 IEC 60947-5-1 DC-14 IEC 60947-5-1 DC-14 IEC 60947-5-1 DC-14 IEC 60947-5-1	Relay Type	Temperature control relays
Relay Name RM35AT Relay Monitored Parameters Undertemperature: -111°C Overtemperature: 3446°C Time Delay Range 0.110 s adjustable 010 % of the full scale value) Switching Capacity In Va 1250 VA Minimum Switching Current 10 mA 5 V DC Maximum Power Consumption In Va 3.5 VA AC Utilisation Category AC-12 IEC 60947-5-1 AC-13 IEC 60947-5-1 AC-15 IEC 60947-5-1 DC-12 IEC 60947-5-1 DC-12 IEC 60947-5-1 DC-13 IEC 60947-5-1 Time Delay Adjustable 110 s Tt- time delay upon fault	Product Or Component Type	Elevator machine room temperature control relay
Relay Monitored Parameters Undertemperature: -111°C Overtemperature: 3446°C Time Delay Range 0.110 s adjustable 010 % of the full scale value) Switching Capacity In Va 1250 VA Minimum Switching Current 10 mA 5 V DC Maximum Power Consumption In Va 3.5 VA AC Utilisation Category AC-12 IEC 60947-5-1 AC-13 IEC 60947-5-1 AC-14 IEC 60947-5-1 DC-12 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-13 IEC 60947-5-1 Time Delay Adjustable 110 s Tt- time delay upon fault	Product Specific Application	For elevator machine rooms and 3-phase supplies
Overtemperature: 3446°C Time Delay Range 0.110 s adjustable 010 % of the full scale value) Switching Capacity In Va 1250 VA Minimum Switching Current 10 mA 5 V DC Maximum Power Consumption In Va 3.5 VA AC Va AC-12 IEC 60947-5-1 Va AC-13 IEC 60947-5-1 Va AC-15 IEC 60947-5-1 DC-15 IEC 60947-5-1 DC-15 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-14 IEC 60947-5-1 DC-14 IEC 60947-5-1 DC-14 IEC 60947-5-1 Time Delay Adjustable 110 s Tt- time delay upon fault	Relay Name	RM35AT
Switching Capacity In Va 1250 VA Minimum Switching Current 10 mA 5 V DC Maximum Power Consumption In 3.5 VA AC Va AC-12 IEC 60947-5-1 AC-13 IEC 60947-5-1 AC-14 IEC 60947-5-1 AC-15 IEC 60947-5-1 DC-12 IEC 60947-5-1 DC-14 IEC 60947-5-1	Relay Monitored Parameters	
Minimum Switching Current 10 mA 5 V DC Maximum Power Consumption In 3.5 VA AC Va AC-12 IEC 60947-5-1 Utilisation Category AC-12 IEC 60947-5-1 AC-13 IEC 60947-5-1 AC-14 IEC 60947-5-1 AC-15 IEC 60947-5-1 DC-12 IEC 60947-5-1 DC-12 IEC 60947-5-1 DC-12 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-14 IEC 60947-5-1 DC-14 IEC 60947-5-1 Time Delay Adjustable 110 s Tt- time delay upon fault	Time Delay Range	0.110 s adjustable 010 % of the full scale value)
Maximum Power Consumption In Va 3.5 VA AC Utilisation Category AC-12 IEC 60947-5-1 AC-13 IEC 60947-5-1 AC-14 IEC 60947-5-1 AC-15 IEC 60947-5-1 DC-12 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-14 IEC 60947-5-1 Time Delay Adjustable 110 s Tt- time delay upon fault	Switching Capacity In Va	1250 VA
Va AC-12 IEC 60947-5-1 AC-13 IEC 60947-5-1 AC-13 IEC 60947-5-1 AC-14 IEC 60947-5-1 AC-15 IEC 60947-5-1 DC-12 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-13 IEC 60947-5-1 Time Delay Adjustable 110 s Tt- time delay upon fault	Minimum Switching Current	10 mA 5 V DC
AC-13 IEC 60947-5-1 AC-14 IEC 60947-5-1 AC-14 IEC 60947-5-1 DC-15 IEC 60947-5-1 DC-12 IEC 60947-5-1 DC-13 IEC 60947-5-1 DC-14 IEC 60947-5-1 Time Delay Adjustable 110 s Tt- time delay upon fault		3.5 VA AC
•	Utilisation Category	AC-13 IEC 60947-5-1 AC-14 IEC 60947-5-1 AC-15 IEC 60947-5-1 DC-12 IEC 60947-5-1 DC-13 IEC 60947-5-1
Measurement Range +/_ 1_46 °C	Time Delay	Adjustable 110 s Tt- time delay upon fault
······································	Measurement Range	+/- 146 °C

Complementary

Reset Time	8 s
Maximum Switching Voltage	250 V AC/DC
[Us] Rated Supply Voltage	24240 V AC/DC
[Un] Rated Nominal Voltage	24240 V AC/DC 50/60 Hz, non self-powered
Supply Voltage Limits	20.4264 V AC 21.6264 V DC
Maximum Power Consumption In W	0.6 W DC
Resistance Across Terminals	1.33 kOhm temperature
Width	1.38 in (35 mm)
Output Contacts	1 C/O
Contacts Material	Cadmium free

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Nominal Output Current	5 A
Delay At Power Up	0.2 s
Measurement Accuracy	+/- 2 °C
Response Time	<= 3.5 s + Tt (in case of temperature fault) <= 3.5 s (on disappearance of fault)
Temperature Probe Type	Pt 100 - 3-wire
Installed Device	Pt 100 probe cable length <= 10 m
Marking	CE : EMC 89/336/EEC CE : 73/23/EEC
Overvoltage Category	III IEC 60664-1
Insulation Resistance	 > 500 MOhm 500 V DC between supply and relay output IEC 60255-5 > 500 MOhm 500 V DC between measurement and relay output IEC 60664-1 > 1 MOhm 500 V DC between supply and measurement IEC 60255-5 > 500 MOhm 500 V DC between supply and relay output IEC 60664-1 > 500 MOhm 500 V DC between measurement and relay output IEC 60255-5 > 1 MOhm 500 V DC between supply and measurement IEC 60664-1
[Ui] Rated Insulation Voltage	250 V IEC 60664-1
Operating Voltage Tolerance	- 10 % + 10 % Un DC - 15 % + 10 % Un AC
Supply Frequency	50/60 Hz +/- 10 %
Insulation	Galvanic insulation between supply and measurement
Operating Position	Any position without derating
Connections - Terminals	Screw terminals, 1 x 0.51 x 4 mm ² AWG 20AWG 11) solid without cable end Screw terminals, 2 x 0.52 x 2.5 mm ² AWG 20AWG 14) solid without cable end Screw terminals, 1 x 0.21 x 2.5 mm ² AWG 24AWG 12) flexible with cable end Screw terminals, 2 x 0.22 x 1.5 mm ² AWG 24AWG 16) flexible with cable end
Tightening Torque	5.318.85 lbf.in (0.61 N.m) IEC 60947-1
Housing Material	Self-extinguishing plastic
Local Signalling	1 LED Green power ON 1 LED Yellow correct temperature (high R1) 1 LED Yellow correct temperature (low R2)
Mounting Support	35 mm symmetrical DIN rail conforming to IEC 60715
Electrical Durability	100000 cycles
Mechanical Durability	3000000 cycles
Operating Rate	<= 360 operations/hour full load
Control Type	Without test button

Environment

Immunity To Microbreaks	10 ms
Electromagnetic Compatibility	Emission standard for industrial environments IEC 61000-6-4 Emission standard for residential, commercial and light-industrial environments IEC 61000-6-3 Immunity for industrial environments NF EN/IEC 61000-6-2
Standards	IEC 60255-6 NF EN 60255-6
Product Certifications	GOST GL C-tick UL CSA
Ambient Air Temperature For Storage	-40158 °F (-4070 °C)

Ambient Air Temperature For Operation	-4122 °F (-2050 °C)
Vibration Resistance	0.35 mm 5…57.6 Hz)IEC 60068-2-6/IEC 60255-21-1 1 gn 57.6…150 Hz)IEC 60068-2-6/IEC 60255-21-1
Shock Resistance	15 gn 11 ms IEC 60255-21-1
Ip Degree Of Protection	IP20 IEC 60529 terminals) IP30 IEC 60529 casing)
Pollution Degree	3 IEC 60664-1
Dielectric Test Voltage	2 kV AC 50 Hz, 1 min
Non-Dissipating Shock Wave	4 kV

Ordering and shipping details

Category	US10CP222380
Discount Schedule	0CP2
Gtin	3389119405164
Returnability	No
Country Of Origin	ID

Packing Units

V	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.15 in (8.0 cm)
Package 1 Width	1.81 in (4.6 cm)
Package 1 Length	3.82 in (9.7 cm)
Package 1 Weight	4.48 oz (127.0 g)
Unit Type Of Package 2	S03
Number Of Units In Package 2	48
Package 2 Height	11.81 in (30.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	14.84 lb(US) (6.732 kg)

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Yes

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance



Rohs Exemption Information

Certifications & Standards


Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Weee Circularity Profile	

Product data sheet

Dimensions Drawings

Temperature Control Relays for Elevator Machine Rooms and 3-Phase Supplies

Dimensions and Mounting

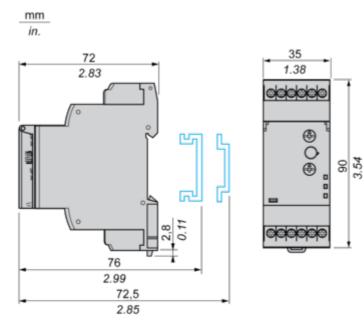


Product data sheet

RM35ATL0MW

Connections and Schema

Temperature Control Relays for Elevator Machine Rooms and 3-Phase Supplies


Wiring Diagram



Technical Description

Function Diagram

Temperature Control by PT 100 Probe



Legend

 $\ensuremath{\text{Tt}}$ Time delay after crossing of the temperature threshold

Un Supply voltage

 θ° Temperature monitored

 θ° > High temperature threshold

 θ° < Low temperature threshold

 ${\bf H}$ Hysteresis

11-12, 11-14 Output relay connections **Relay status:** black color = energized.