Product data sheet

Specifications





Harmony, Interface plug-in relay, 10 A, 1 CO, lockable test button, 48 V DC

RXG11ED

- ! Discontinued on: Dec 2, 2020
- ! End-of-service on: Dec 31, 2020

Main

| ····a··· | |
|---|---------------------------|
| Range Of Product | Harmony Relay |
| Series Name | Interface relay |
| Product Or Component Type | Plug-in relay |
| Device Short Name | RXG |
| Contacts Type And Composition | 1 C/O |
| [Ithe] Conventional Enclosed Thermal Current | 10 A -40131 °F (-4055 °C) |
| Local Signalling | Flag |

Complementary

| Status Led | Without | |
|--------------------------------|--|--|
| [le] Rated Operational Current | 10 A 30 V DC) UL 10 A 30 V DC) IEC 10 A 250 V AC) IEC 10 A 250 V AC) UL | |
| Electrical Durability | 100000 cycles NO resistive at 55 °C 100000 cycles NC resistive at 55 °C | |
| Coil Resistance | 4400 Ohm +/- 10 % | |
| Shock Resistance | 20 gn in operation 100 gn not in operation | |
| Mounting Position | Any position | |
| [Uc] Control Circuit Voltage | 48 V DC | |
| Colour Of Cover | Standard | |
| Drop-Out Voltage Threshold | >= 0.1 Uc DC | |
| Load Current | 10 A 250 V AC | |
| Minimum Switching Capacity | 500 mW at 100 mA, 5 V DC | |
| Maximum Switching Capacity | 2500 VA | |
| Control Type | Lockable test button | |
| Torque Value | 7.08 lbf.in (0.8 N.m) | |
| Insulation Resistance | 1000 MOhm at 500 V DC | |
| Mechanical Durability | 10000000 cycles | |
| Safety Reliability Data | B10d = 100000 | |
| Overvoltage Category | III | |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| Maximum Switching Voltage | 250 V AC 30 V DC | |
|--|---|--|
| Protection Category | RTI | |
| Operating Rate <= 1800 cycles/hour under load <= 18000 cycles/hour no-load | | |
| Utilisation Coefficient | 20 % | |
| Pollution Degree | 2 | |
| [Ui] Rated Insulation Voltage | 250 V IEC 300 V CSA 300 V UL | |
| Dielectric Strength | 1000 V AC between contacts with micro disconnection 5000 V AC between coil and contact with reinforced insulation | |
| Test Levels | Level A group mounting | |
| Device Presentation | Complete product | |
| Contacts Material | Silver alloy (AgSnO2In2O3) | |
| Net Weight | t Weight 0.04 lb(US) (0.02 kg) | |

Environment

| Standards | UL 508 CSA C22.2 No 14 IEC 61810-1 | |
|---------------------------------------|--|--|
| Product Certifications | CE UL EAC CSA | |
| Ambient Air Temperature For Storage | -40185 °F (-4085 °C) | |
| Ambient Air Temperature For Operation | -40158 °F (-4070 °C) | |
| Ip Degree Of Protection | IP40 | |
| Relative Humidity | 1085 % | |
| Vibration Resistance | 3 gn +/- 0.75 mm 10150 Hz)in operation 5 gn +/- 0.75 mm 10150 Hz)not in operation | |

Ordering and shipping details

| Category | 21127-ZELIO ICE CUBE RELAYS | |
|-------------------|-----------------------------|--|
| Discount Schedule | CP2 | |
| Gtin | 00785901949633 | |
| Returnability | No | |
| Country Of Origin | CN | |

Packing Units

| Unit Type Of Package 1 | PCE |
|------------------------------|-----|
| Number Of Units In Package 1 | 1 |



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

| Ø | Reach Free Of Svhc | |
|----------|----------------------------|-----|
| Ø | Toxic Heavy Metal Free | |
| 9 | Mercury Free | |
| ⊘ | Rohs Exemption Information | Yes |


Certifications & Standards


| Reach Regulation | REACh Declaration |
|---------------------------|--|
| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| China Rohs Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | No need of specific recycling operations |
| California Proposition 65 | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |


RXG11ED

Dimensions Drawings

Dimensions

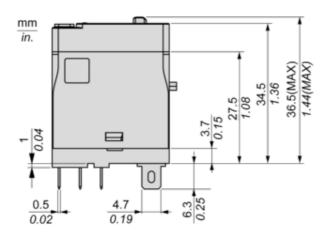






Connections and Schema


Wiring Diagram

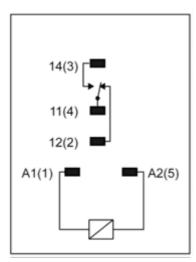

Performance Curves

Performance Curves

Maximum Switching Capacity



X: Switching voltage (V)

Y: Switching current (A)

(1) AC Resistive Load


(2) AC Inductive Load cos(Ø)=0.4

(3) DC Resistive Load

(4) DC Inductive Load (L/R=7ms)

Life Expectancy

Resistive Load



X: Contact Current (A)


Y: Operating Cycle Number

Life Expectancy

Inductive Load

Product data sheet

RXG11ED




X : Contact Current (A)
Y : Operating Cycle Number

environment, duty cycle, etc.

NOTE: These are typical curves, actual durability depends on load,

Coil Operating Range

DC Coil Operating Range VS Ambient Temperature

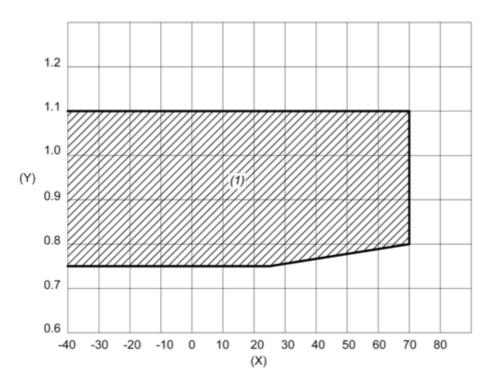

- X : Ambient temperature (°C)
- Y: Coil voltage (U/Uc)
- (1) Permitted operating range area