

TSXIBY100C

coated InterBus bus module - industrial bus - for Premium PLC - 500 mA at 5 V DC

Product availability : Non-Stock - Not normally stocked in distribution facility

Price* : 4,183.70 USD



⚠ Discontinued

TSXIBY100C has not been replaced. Please contact your customer care center for more information.

Main

Range of product	Modicon Premium Automation platform
Product or component type	InterBus bus module
Product specific application	For Premium PLC
Structure type	Industrial bus
Number of tap-offs	<= 16 remote bus

Complementary

Physical interface	Combined interface InterBus loop RS485 remote bus RS485 with 24 V DC in cable installation remote bus TTL local bus
Method of access	Master/slave generation 4
Mode of transmission	NRZ
Transmission rate	500 kbit/s
Transmission support medium	2 x 1.5 mm ² InterBus loop Fiber optic remote bus Infrared remote bus Rotating collector remote bus Twisted pair remote bus Wave guide rail remote bus
Length of segment	<= 656.17 ft (200 m) InterBus loop <= 1312.34 ft (400 m) remote bus
Cable distance between devices	1.5 m local bus between 2 bus terminals modules 1.5 m local bus between bus terminal module and first module 10 m InterBus loop between 2 bus terminals modules 10 m local bus between bus terminal module and last module 100 m InterBus loop between bus terminal module and last module 12800 m remote bus between module and last station on the remote bus 20 m InterBus loop between bus terminal module and first module 400 m remote bus between 2 bus terminals modules 400 m remote bus between module and the first bus terminal module 50 m installation remote bus between 2 bus terminals modules 50 m between bus terminal module and first module 50 m installation remote bus between bus terminal module and last module
Number of loops	1 InterBus loop
Number of bus terminals module	<= 254 remote bus
Number of slave	<= 512 remote bus

	<= 63 InterBus loop <= 8 local bus
Input/Output number	<= 4096 <= 3872 <= 3872 remote bus
Communication service	Bus operating modes management Cyclical variable exchange Logical addressing PMS messaging Pre-processing Segmentation Implicit exchange of data process 242 %IW 242 %QW
Local signalling	6 LEDs
Electrical connection	1 connector female SUB-D 9 RS232 CMD tool software support 1 connector female SUB-D 9 RS485 Interbus link
Current consumption	500 mA 5 V DC
Module format	Standard
Protective treatment	Conformal coating Humiseal 1A33
Product weight	0.71 lb(US) (0.32 kg)

Environment

Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-13...158 °F (-25...70 °C)
Relative humidity	5...95 % without condensation
Operating altitude	0...6561.68 ft (0...2000 m)
IP degree of protection	IP20

Ordering and shipping details

Category	22558 - TSX PREMIUM, ATRIUM & PL7 PRO
Discount Schedule	PC22
GTIN	003595863969979
Nbr. of units in pkg.	1
Package weight(Lbs)	2.2000000000000002
Returnability	N
Country of origin	FR

Offer Sustainability


RoHS (date code: YYWW)	Compliant - since 0809 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product end of life instructions	Need no specific recycling operations
California proposition 65	WARNING: This product can expose you to chemicals including:
- - - - - Substance 1	Lead and lead compounds which is known to the State of California to cause cancer and birth defects or other reproductive harm.
- - - - - More information	For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty period	18 months
-----------------	-----------

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

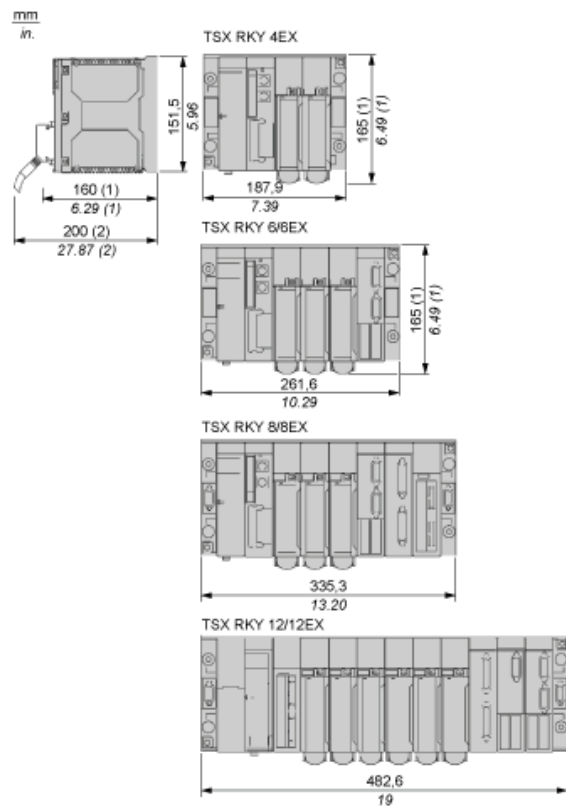

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.