# **Product data sheet**

Specification





Antimicrobial Flush mounted selector switch head, Harmony XB5, plastic, black, 30mm, 2 positions, stay put

ZB5FD2

Product availability: Stock - Normally stocked in distribution facility

Price\*: 24.30 USD

#### Main

Range Of Product	Harmony XB5		
Product Or Component Type	Head for selector switch		
Device Short Name	ZB5		
Bezel Material	Dark grey plastic		
Mounting Diameter	1.20 in (30.5 mm)		
Head Type	Built-in-flush		
Sale Per Indivisible Quantity	1		
Shape Of Signaling Unit Head	Round		
Type Of Operator	stay put		
Operator Profile	Black standard handle		
Operator Position Information	2 positions 90°		

#### Complementary

1.46 in (37 mm)				
1.46 in (37 mm)				
1.81 in (46 mm)				
0.07 lb(US) (0.031 kg)				
1000000 cycles				
C3 6 single front mounting				
C4 6 single and double front mounting				
C5 5 single front mounting				
C6 5 single and double front mounting				
C7 4 single front mounting				
C8 4 single and double front mounting				
C11 3 single front mounting				
C15 1 single front mounting				
SF1 3 single front mounting				
Basic element				

# **Environment**

Protective Treatment	TH	
Ambient Air Temperature For Storage	-40158 °F (-4070 °C)	
Ambient Air Temperature For Operation	-40158 °F (-4070 °C)	

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Overvoltage Category	Class II IEC 60536				
Ip Degree Of Protection	IP66 IEC 60529 IP67 IEC 60529 IP69K IP69				
Nema Degree Of Protection	NEMA 13 NEMA 4X				
Resistance To High Pressure Washer	1015.26 psi (7000000 Pa) 131 °F (55 °C) 0.1 m				
Ik Degree Of Protection	IK03 conforming to IEC 50102				
Standards	JIS C8201-5-1 IEC 60947-5-1 CSA C22.2 No 14 IEC 60947-1 UL 508 IEC 60947-5-4 JIS C8201-1 ISO 21702 ISO 22196:2011				
Product Certifications	UL Listed GL DNV LROS (Lloyds register of shipping) BV CSA				
Vibration Resistance	5 gn 2500 Hz)IEC 60068-2-6				
Shock Resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27				

# Ordering and shipping details

Category	US10CS222467			
Discount Schedule	0CS2			
Gtin	3606481339232			
Returnability	Yes			
Country Of Origin	FR			

# **Packing Units**

_	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	1.69 in (4.3 cm)
Package 1 Width	2.05 in (5.2 cm)
Package 1 Length	2.17 in (5.5 cm)
Package 1 Weight	0.99 oz (28.0 g)
Unit Type Of Package 2	S02
Number Of Units In Package 2	80
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	5.74 lb(US) (2.603 kg)



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Well-being performance


<b>⊘</b>	Reach Free Of Svhc	
<b>⊘</b>	Toxic Heavy Metal Free	
<b>⊘</b>	Mercury Free	
<b>⊘</b>	Rohs Exemption Information	Yes

#### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

## **Dimensions Drawings**

#### **Dimensions**

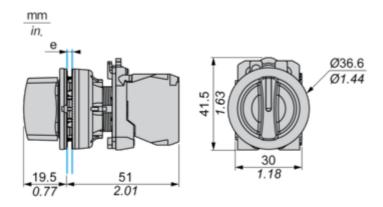


e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

#### ZB5FD2

## Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

#### Connection by Screw Clamp Terminals or Plug-in Connectors



(1) Diameter on finished panel or support


(2) Ø30.75 mm recommended (Ø30.5  $_0^{+0.5}$ ) / Ø1.21 in. recommended (Ø1.20 in.  $_0^{+0.0196}$ )


0				0
Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	40	1.57
By Faston connectors	45	1.77	40	1.57


**Technical Description** 














**Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1** 



1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



## Legend

Single contact



Double contact



Light block



Possible location



## Sequence of Contacts Fitted to 2-position Selector Switch Body

#### Position 315°



Push	Position	Тор				
		Bottom				
	Location		Left	Centre	Right	
	State		0	0	0	
Contacts	N/O		open	open	open	
	N/C		closed	closed	closed	

#### Position 45°



Push		Тор			
	Position	Bottom			
	Location		Left	Centre	Right
	State		1	1	1
Contacts	N/O		closed	closed	closed
	N/C		open	open	open