

# Product data sheet

Specifications



Light block, Harmony XB4,  
Harmony XB5, green, for head  
22mm, integral LED, spring clamp  
terminals, 230...240V

ZBVM35

! Discontinued

! Discontinued on: Oct 9, 2023

**Product availability:** Non-Stock - Not normally stocked in  
distribution facility  
**Important message:** All colored LED are replaced with a single  
Universal LED block for use with new illuminated heads (more  
information at [se.com/harmonyxb4](https://se.com/harmonyxb4) or [se.com/harmonyxb5](https://se.com/harmonyxb5))

## Main

Range Of Product	Harmony XB4 Harmony XB5
Product Or Component Type	Light block
Device Short Name	ZBV
Sale Per Indivisible Quantity	4
Connections - Terminals	Spring clamp terminals
Signalling Type	Steady
Light Source	Protected LED
Bulb Base	Integral LED
Light Block Supply	Direct
Light Source Colour	Green
[Us] Rated Supply Voltage	230...240 V AC 50/60 Hz

## Complementary

Net Weight	0.04 lb(US) (0.016 kg)
Supply Voltage Limits	195...264 V AC
Current Consumption	14 mA
Service Life	100000 h at rated voltage and 25 °C
Surge Withstand	1 kV IEC 61000-4-5
Mounting Of Block	Front mounting
Electrical Composition Code	M1 M2 M3 M4 M5 M6 M10 MF1 P1 P2 PF1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

# Environment

Protective Treatment	TH
Ambient Air Temperature For Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature For Operation	-40...158 °F (-40...70 °C)
Ip Degree Of Protection	IP20 IEC 60529
Standards	EN/IEC 60947-1 EN/IEC 60947-5-4 EN/IEC 60947-5-5 UL 508 CSA C22.2 No 14 EN/IEC 60947-5-1 JIS C8201-5-1 JIS C8201-1
Resistance To Fast Transients	2 kV IEC 61000-4-4
Resistance To Electromagnetic Fields	9.14 V/m (10 V/m) IEC 61000-4-3
Resistance To Electrostatic Discharge	6 kV on contact (on metal parts) IEC 61000-4-2 8 kV in free air (in insulating parts) IEC 61000-4-2
Electromagnetic Emission	Class B IEC 55011
[Us] Rated Supply Voltage	230...240 V

# Ordering and shipping details

Category	US10CS222469
Discount Schedule	0CS2
Gtin	3389119037600
Returnability	No
Country Of Origin	FR

# Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	1.73 in (4.4 cm)
Package 1 Width	2.13 in (5.4 cm)
Package 1 Length	2.20 in (5.6 cm)
Package 1 Weight	0.14 oz (4.0 g)
Unit Type Of Package 2	BB1
Number Of Units In Package 2	4
Package 2 Height	1.73 in (4.4 cm)
Package 2 Width	2.13 in (5.4 cm)
Package 2 Length	2.20 in (5.6 cm)
Package 2 Weight	1.55 oz (44.0 g)
Unit Type Of Package 3	S03
Number Of Units In Package 3	640
Package 3 Height	11.81 in (30.0 cm)
Package 3 Width	11.81 in (30.0 cm)
Package 3 Length	15.75 in (40.0 cm)

Package 3 Weight	17.01 lb(US) (7.715 kg)
------------------	-------------------------

## Contractual warranty

Warranty	18 months
----------	-----------

Sustainability



**Green Premium™** label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency   RoHS/REACH

## Well-being performance

 Mercury Free

 RoHS Exemption Information   [Yes](#)

## Certifications & Standards


Reach Regulation	<a href="#">REACH Declaration</a>
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	<a href="#">End of Life Information</a>
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

Dimensions Drawings

Dimensions

---

with ZB5AZ009 Fixing Collar

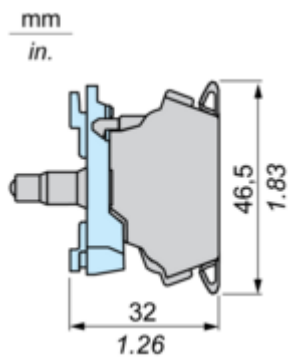

with ZB4BZ009 Fixing Collar

