


# 8536SAG11V80CF4T

Non-Reversing Starter Size 00, 2-Pole, Melting Alloy Overload, NEMA 1+Options



Price\*\* : 1,008.00 USD

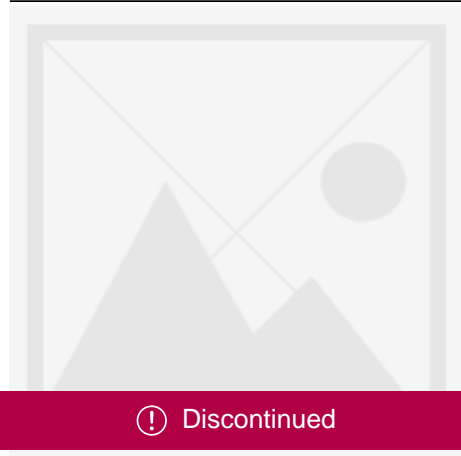

8536SAG11V80CF4T has not been replaced. Please contact your customer care center for more information.

## Main

Product or component type	Starter
Type	S
Control Circuit Type	Control circuit transformer

## Complementary

Control Circuit Voltage	240 V AC 60 Hz primary circuit 120 V AC 60 Hz secondary circuit
Motor starter type	Non reversing
Current Rating	9 A
Number of Poles	2P
Number of Phases	1 phase
Horsepower Rating	0.33 HP 115 V AC 1 HP 230 V AC
Maximum Voltage Rating	600 V AC
Control Units	Selector switch (HAND-OFF-AUTO)
Control Circuit Fusing	2 fuses (primary)
Thermal overload type	Melting alloy 1
Electrical connection	Screw clamp terminals
NEMA size	00
Height	15.87 in (403 mm)
Depth	5.20 in (132 mm)
Width	6.34 in (161 mm)

## Environment

Enclosure Type	NEMA 1 painted sheet steel
Product certifications	UL listed CSA NEMA

Ordering and shipping details

Category	21191-8502,36 SA,SB(NOT S*R,T,W)
Discount Schedule	CP1
Package weight(Lbs)	26.21 lb(US) (11.889 kg)
Returnability	No
Country of origin	MX

Contractual warranty

Warranty	18 months
----------	-----------