Product data sheet

Specification





AC servo motor BSH, Lexium 05, 3.39N.m, 4000rpm, untapped shaft, with brake, IP65

BSH1001T21F2A

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 2,415.00 USD

Main

<u> </u>	
Product Or Component Type	Servo motor
Device Short Name	BSH
Maximum Mechanical Speed	6000 rpm
Continuous Stall Torque	29.21 lbf.in (3.3 N.m) LXM32.D30M2 10 A, 115 V, single phase
	30.00 lbf.in (3.39 N.m) LXM15LD28M3, 230 V, three phase
	30.09 lbf.in (3.4 N.m) LXM05AD28F1, 110120 V, single phase
	30.09 lbf.in (3.4 N.m) LXM05AD28M2, 200240 V, single phase
	30.09 lbf.in (3.4 N.m) LXM05AD42M3X, 200240 V, three phase
	30.09 lbf.in (3.4 N.m) LXM05BD28F1, 110120 V, single phase
	30.09 lbf.in (3.4 N.m) LXM05BD28M2, 200240 V, single phase
	30.09 lbf.in (3.4 N.m) LXM05BD42M3X, 200240 V, three phase
	30.09 lbf.in (3.4 N.m) LXM05CD28F1, 110120 V, single phase
	30.09 lbf.in (3.4 N.m) LXM05CD28M2, 200240 V, single phase
	30.09 lbf.in (3.4 N.m) LXM05CD42M3X, 200240 V, three phase
	23.90 lbf.in (2.7 N.m) LXM32.D18M2 6 A, 230 V, single phase
Peak Stall Torque	55.76 lbf.in (6.3 N.m) LXM32.D30M2 10 A, 115 V, single phase
	75.23 lbf.in (8.5 N.m) LXM05AD28F1, 110120 V, single phase
	75.23 lbf.in (8.5 N.m) LXM05AD28M2, 200240 V, single phase
	75.23 lbf.in (8.5 N.m) LXM05BD28F1, 110120 V, single phase
	75.23 lbf.in (8.5 N.m) LXM05BD28M2, 200240 V, single phase
	75.23 lbf.in (8.5 N.m) LXM05CD28F1, 110120 V, single phase
	75.23 lbf.in (8.5 N.m) LXM05CD28M2, 200240 V, single phase
	66.38 lbf.in (7.5 N.m) LXM32.D18M2 6 A, 230 V, single phase
	75.23 lbf.in (8.5 N.m) LXM15LD28M3, 230 V, three phase
	75.23 lbf.in (8.5 N.m) LXM05AD42M3X, 200240 V, three phase
	75.23 lbf.in (8.5 N.m) LXM05BD42M3X, 200240 V, three phase
	75.23 lbf.in (8.5 N.m) LXM05CD42M3X, 200240 V, three phase
Nominal Output Power	700 W LXM32.D30M2 10 A, 115 V, single phase
•	900 W LXM32.D18M2 6 A, 230 V, single phase
	500 W LXM05AD28F1, 110120 V, single phase
	500 W LXM05BD28F1, 110120 V, single phase
	500 W LXM05CD28F1, 110120 V, single phase
	900 W LXM05AD28M2, 200240 V, single phase
	900 W LXM05BD28M2, 200240 V, single phase
	900 W LXM05CD28M2, 200240 V, single phase
	1150 W LXM15LD28M3, 230 V, three phase
	900 W LXM05AD42M3X, 200240 V, three phase
	900 W LXM05BD42M3X, 200240 V, three phase
	900 W LXM05CD42M3X, 200240 V, three phase
Nominal Torque	24.34 lbf.in (2.75 N.m) LXM32.D30M2 10 A, 115 V, single phase
· · · · · · · · · · · · · · · · · · ·	25.67 lbf.in (2.9 N.m) LXM05AD28M2, 200240 V, single phase
	25.67 lbf.in (2.9 N.m) LXM05BD28M2, 200240 V, single phase
	25.67 lbf.in (2.9 N.m) LXM05CD28M2, 200240 V, single phase
	27.97 lbf.in (3.16 N.m) LXM05AD28F1, 110120 V, single phase
	27.97 lbf.in (3.16 N.m) LXM05BD28F1, 110120 V, single phase
	27.97 lbf.in (3.16 N.m) LXM05CD28F1, 110120 V, single phase
	19.47 lbf.in (2.2 N.m) LXM32.D18M2 6 A, 230 V, single phase
	24.34 lbf.in (2.75 N.m) LXM15LD28M3, 230 V, three phase
	25.67 lbf.in (2.9 N.m) LXM05AD42M3X, 200240 V, three phase
	25.67 lbf.in (2.9 N.m) LXM05BD42M3X, 200240 V, three phase
	25.67 lbf.in (2.9 N.m) LXM05CD42M3X, 200240 V, three phase

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Nominal Speed Product Compatibility	2500 rpm LXM32.D30M2 10 A, 115 V, single phase 3000 rpm LXM05AD28M2, 200240 V, single phase 3000 rpm LXM05BD28M2, 200240 V, single phase 3000 rpm LXM05CD28M2, 200240 V, single phase 3000 rpm LXM05AD42M3X, 200240 V, three phase 3000 rpm LXM05BD42M3X, 200240 V, three phase 3000 rpm LXM05CD42M3X, 200240 V, three phase 4000 rpm LXM05CD42M3X, 200240 V, three phase 4000 rpm LXM32.D18M2 6 A, 230 V, single phase 1500 rpm LXM05AD28F1, 110120 V, single phase 1500 rpm LXM05BD28F1, 110120 V, single phase 1500 rpm LXM05CD28F1, 110120 V, single phase 4000 rpm LXM15LD28M3, 230 V, three phase LXM05AD28F1 110120 V single phase LXM05AD28M2 200240 V single phase LXM05BD28M2 200240 V single phase LXM05BD28M2 200240 V single phase LXM05CD28M2 200240 V single phase LXM05CD28M2 200240 V single phase LXM05CD28M2 200240 V single phase
	LXM32.D30M2 115 V single phase LXM32.D18M2 230 V single phase LXM05AD42M3X 200240 V three phase LXM05BD42M3X 200240 V three phase LXM05CD42M3X 200240 V three phase LXM15LD28M3 230 V three phase
Shaft End	Untapped
Ip Degree Of Protection	IP65 standard IP67 with IP67 kit
Speed Feedback Resolution	131072 points/turn
Holding Brake	With
Mounting Support	International standard flange
Electrical Connection	Rotatable right-angled connectors
Complementary	
Complementary Range Compatibility	Lexium 15 Lexium 32 Lexium 05
	Lexium 32
Range Compatibility	Lexium 32 Lexium 05
Range Compatibility Supply Voltage Max	Lexium 32 Lexium 05 480 V
Range Compatibility Supply Voltage Max Phase	Lexium 32 Lexium 05 480 V Three phase
Range Compatibility Supply Voltage Max Phase Continuous Stall Current Maximum Continuous Power Maximum Current Irms	Lexium 32 Lexium 05 480 V Three phase 7.3 A
Range Compatibility Supply Voltage Max Phase Continuous Stall Current Maximum Continuous Power	Lexium 32 Lexium 05 480 V Three phase 7.3 A 1.6 W 18 A LXM32.D18M2 230 V 15 A LXM32.D30M2 115 V 23 A LXM15LD28M3 25.1 A LXM05AD28F1 25.1 A LXM05AD28M2 25.1 A LXM05AD28F1 25.1 A LXM05BD28F1 25.1 A LXM05BD28F1 25.1 A LXM05BD28F1 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05BD42M3X 25.1 A LXM05BD42M3X 25.1 A LXM05CD28F1 25.1 A LXM05CD28M2
Range Compatibility Supply Voltage Max Phase Continuous Stall Current Maximum Continuous Power Maximum Current Irms	Lexium 32 Lexium 05 480 V Three phase 7.3 A 1.6 W 18 A LXM32.D18M2 230 V 15 A LXM32.D30M2 115 V 23 A LXM15LD28M3 25.1 A LXM05AD28F1 25.1 A LXM05AD28M2 25.1 A LXM05AD28M2 25.1 A LXM05BD28F1 25.1 A LXM05BD28M2 25.1 A LXM05CD28F1 25.1 A LXM05CD28F1 25.1 A LXM05CD28M2 25.1 A LXM05CD28M2 25.1 A LXM05CD28M2
Range Compatibility Supply Voltage Max Phase Continuous Stall Current Maximum Continuous Power Maximum Current Irms	Lexium 32 Lexium 05 480 V Three phase 7.3 A 1.6 W 18 A LXM32.D18M2 230 V 15 A LXM32.D30M2 115 V 23 A LXM15LD28M3 25.1 A LXM05AD28F1 25.1 A LXM05AD28F1 25.1 A LXM05AD28F1 25.1 A LXM05BD28F1 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05BD42M3X 25.1 A LXM05CD28F1 25.1 A LXM05CD28M2 25.1 A LXM05CD28M2 25.1 A LXM05CD42M3X
Range Compatibility Supply Voltage Max Phase Continuous Stall Current Maximum Continuous Power Maximum Current Irms Maximum Permanent Current Switching Frequency	Lexium 32 Lexium 05 480 V Three phase 7.3 A 1.6 W 18 A LXM32.D18M2 230 V 15 A LXM32.D30M2 115 V 23 A LXM15LD28M3 25.1 A LXM05AD28F1 25.1 A LXM05AD28M2 25.1 A LXM05AD28M2 25.1 A LXM05BD28F1 25.1 A LXM05BD28F1 25.1 A LXM05BD28M2 25.1 A LXM05BD42M3X 25.1 A LXM05BD42M3X 25.1 A LXM05CD28F1 25.1 A LXM05CD28F1 25.1 A LXM05CD28M2 25.1 A LXM05CD42M3X
Range Compatibility Supply Voltage Max Phase Continuous Stall Current Maximum Continuous Power Maximum Current Irms Maximum Permanent Current Switching Frequency Second Shaft Shaft Diameter Shaft Length	Lexium 32 Lexium 05 480 V Three phase 7.3 A 1.6 W 18 A LXM32.D18M2 230 V 15 A LXM32.D30M2 115 V 23 A LXM15LD28M3 25.1 A LXM05AD28F1 25.1 A LXM05AD28F1 25.1 A LXM05AD28M2 25.1 A LXM05BD28F1 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05CD28M2 25.1 A LXM05CD42M3X 25.1 A LXM05CD42M3X 25.1 A LXM05CD42M3X 25.1 A LXM05CD42M3X
Range Compatibility Supply Voltage Max Phase Continuous Stall Current Maximum Continuous Power Maximum Current Irms Maximum Permanent Current Switching Frequency Second Shaft Shaft Diameter	Lexium 32 Lexium 05 480 V Three phase 7.3 A 1.6 W 18 A LXM32.D18M2 230 V 15 A LXM32.D30M2 115 V 23 A LXM15LD28M3 25.1 A LXM05AD28F1 25.1 A LXM05AD28M2 25.1 A LXM05AD28M2 25.1 A LXM05BD28F1 25.1 A LXM05BD28F1 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05BD28M2 25.1 A LXM05CD28F1 25.1 A LXM05CD28F1 25.1 A LXM05CD28M2 25.1 A LXM05CD28M2 25.1 A LXM05CD28M2 25.1 A LXM05CD42M3X 25.1 A 8 kHz Without second shaft end 0.75 in (19 mm)

Motor Flange Size	3.94 in (100 mm)
Number Of Motor Stacks	1
Torque Constant	0.45 N.m/A 248 °F (120 °C)
Back Emf Constant	29 V/krpm 248 °F (120 °C)
Number Of Motor Poles	8
Rotor Inertia	2.018 kg.cm²
Stator Resistance	0.87 Ohm 68 °F (20 °C)
Stator Inductance	4 mH 68 °F (20 °C)
Stator Electrical Time Constant	4.6 ms 68 °F (20 °C)
Maximum Radial Force Fr	530 N 5000 rpm 570 N 4000 rpm 630 N 3000 rpm 720 N 2000 rpm 900 N 1000 rpm
Maximum Axial Force Fa	0.2 x Fr
Brake Pull-In Power	18 W
Type Of Cooling	Natural convection
Length	7.85 in (199.5 mm)
Centring Collar Diameter	3.74 in (95 mm)
Centring Collar Depth	0.14 in (3.5 mm)
Number Of Mounting Holes	4
Mounting Holes Diameter	0.35 in (9 mm)
Circle Diameter Of The Mounting Holes	4.53 in (115 mm)
Net Weight	10.58 lb(US) (4.8 kg)

Ordering and shipping details

Category	US1PC5318282
Discount Schedule	PC53
Gtin	3389118138612
Returnability	No
Country Of Origin	DE

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	6.06 in (15.4 cm)
Package 1 Width	6.42 in (16.3 cm)
Package 1 Length	16.02 in (40.7 cm)
Package 1 Weight	10.91 lb(US) (4.95 kg)

Contractual warranty

Warranty 18 months

Sustainability Screen Premium*

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards

Reach Regulation	REACh Declaration					
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)					
China Rohs Regulation	China RoHS declaration					
Environmental Disclosure	Product Environmental Profile					
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.					
Circularity Profile	No need of specific recycling operations					
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov					


Apr 25, 2024

BSH1001T21F2A

Dimensions Drawings

Servo Motors Dimensions

Example with Straight Connectors

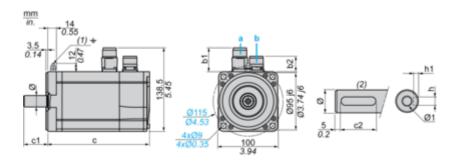

- a: Power supply for servo motor brake
- **b**: Power supply for servo motor encoder
- (1) M4 screw
- (2) Shaft end, keyed slot (optional)

Dimensions in mm

Straight Rotatable angled connectors connectors		U	c (without brake)	c (with	c1	c2	h	h1	Ø	Ø1 for	
b1	b2	b1	b2	Diake)	brake)						screws
39.5	25.5	39.5	39.5	169	200	40	30	6 N9	3.5 ^{+0.1} ₀	19 k6	M6 x 16

Dimensions in in.

Straight connectors		Rotatable angled connectors		c (without	c (with	c1	c2	h	h1	Ø	Ø1 for
b1	b2	b1	b2	brake)	brake)						screws
1.55	1.00	1.55	1.55	6.65	7.87	1.57	1.18	0.24 N9	0.14 ^{+0.1} 0	0.75 k6	M6 x 0.63


BSH1001T21F2A

Performance Curves

115 V Single-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D30M2 servo drive




- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

230 V Single-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D18M2 servo drive



- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque