


GS1AF34 has not been replaced. Please contact your customer care center for more information.

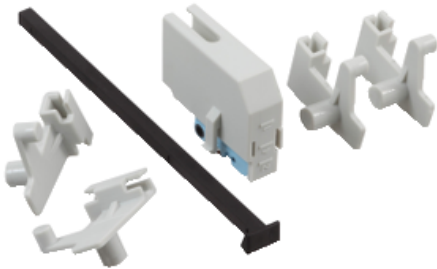

ⓘ Discontinued

Main

Range of product	TeSys
Device short name	GS1AF
Product or component type	Auxiliary contact
Contact application	Blown fuse signalling
Contacts type and composition	1 C/O
Contact operation	Instantaneous
[I _{th}] conventional free air thermal current	16 A at 104 °F (40 °C)
[I _e] rated operational current	12 A at 24 V DC-13 2 A at 48 V DC-13 3 A at 400 V AC-15 4 A at 230 V AC-15 0.4 A at 220 V DC-13 0.6 A at 110 V DC-13

Complementary

Range compatibility	TeSys , TeSys GS , fuse-switch disconnecter
Mechanical durability	30000 cycles
Electrical durability	30000 cycles on AC-15
Product compatibility	GS
Poles description	4P
Line Rated Current	160 A
Fuse type	DIN NFC
Fuse size	0

Ordering and shipping details

Category	18402 - WORLD SERVICE PARTS(CONTROL ACCESS)
Discount Schedule	CP10
Nbr. of units in pkg.	1
Package weight(Lbs)	0.10000000000000001
Returnability	N

Offer Sustainability

RoHS (date code: YYWW)	Compliant - since 0724 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
California proposition 65	WARNING: This product can expose you to chemicals including:
----- Substance 1	Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer.
----- Substance 2	Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm.
----- More information	For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty period	18 months
-----------------	-----------