

# empty pendant control station XAC-B - 2 openings + 1 in base

XACB021

Product availability: Non-Stock - Not normally stocked in distribution facility

! Discontinued

## Main

Range Of Product	Harmony XAC		
Product Or Component Type	Pendant control station		
Device Short Name	XACB		

# Complementary

Control Station Type	Double insulated
Enclosure Material	Glass reinforced polyester
Electrical Circuit Type	Control circuit Power circuit
Enclosure Type	Empty enclosure
Number Of Cut-Out	2 cut-outs
Control Station Colour	Yellow
Cable Entry	Rubber sleeve with stepped entry 0.390.87 in (1022 mm)
Guard Rail	Without
Vertical Operator Cut-Out Centre	1.57 in (40 mm)
Standards	CSA C22.2 No 14 EN/IEC 60947-5-1
Product Certifications	CSA type 4
Protective Treatment	тн
Ambient Air Temperature For Operation	-13158 °F (-2570 °C)
Ambient Air Temperature For Storage	-40158 °F (-4070 °C)
Vibration Resistance	15 gn 10500 Hz)IEC 60068-2-6
Shock Resistance	100 gn IEC 60068-2-27
Overvoltage Category	Class II IEC 61140
Ip Degree Of Protection	IP65 conforming to IEC 60529
Ik Degree Of Protection	IK08 conforming to EN 50102
Mechanical Durability	1000000 cycles
Net Weight	1.68 lb(US) (0.76 kg)

# Ordering and shipping details

Category US10CS222473

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Discount Schedule	0CS2
Gtin	3389110640588
Returnability	No
Country Of Origin	FR

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.74 in (9.5 cm)
Package 1 Width	4.13 in (10.5 cm)
Package 1 Length	20.47 in (52.0 cm)
Package 1 Weight	29.63 oz (840.0 g)
Unit Type Of Package 2	S04
Number Of Units In Package 2	6
Package 2 Height	11.81 in (30.0 cm)
Package 2 Width	15.75 in (40.0 cm)
Package 2 Length	23.62 in (60.0 cm)
Package 2 Weight	13.87 lb(US) (6.292 kg)

# **Contractual warranty**

Warranty 18 months

# Sustainability

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >


# Well-being performance

<b>②</b>	Reach Free Of Svhc	
<b>Ø</b>	Toxic Heavy Metal Free	
<b>Ø</b>	Mercury Free	
	Rohs Exemption Information	Yes
Read	ch Regulation	REACh Declaration
Eu F	Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Chin	na Rohs Regulation	China RoHS declaration
Calif	fornia Proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

## **Dimensions Drawings**

## **Dimensions**

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

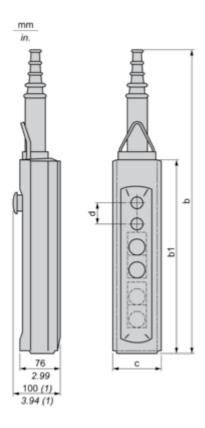

## (1) With mushroom head operator


#### Dimensions in mm

Number of cut-outs	2	4	6	8	12
b	409	499	589	679	679
b1	220	310	400	490	490
С	98	98	98	98	98
d	40	40	40	40	30

#### Dimensions in in.

Number of cut-outs	2	4	6	8	12
b	16.10	19.64	23.19	26.73	26.73
b1	8.66	12.20	15.75	19.29	19.29
С	3.86	3.86	3.86	3.86	3.86
d	1.57	1.57	1.57	1.57	1.18

Protective cable sleeves




(1) Internal ø

# Connections and Schema


# Control of Single-Speed Reversing Motor

With XESD1181 contact block, to be ordered separately



## **Control of 2-Speed Reversing Motor**


With XESD1281 contact block, to be ordered separately

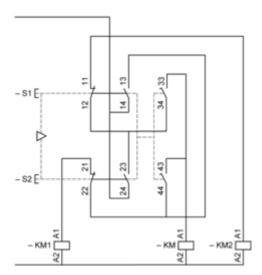


KM High speed contactor

## **Control of Single-Speed Reversing Motor 2-Phase Switching**

With XESD1191 contact block, to be ordered separately

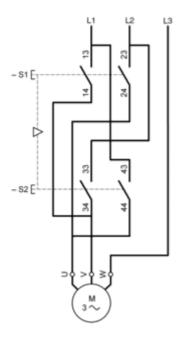


Combined with 3-pole isolating block XACS399 or XACS3991, shown in the unoperated position (pendant station "supplied"), fitted with key release trigger action latching Emergency stop operator.

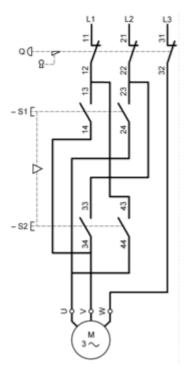


# **Control of 2-Speed Reversing Motor 2-Phase Switching**

With XESD1291 contact block, to be ordered separately

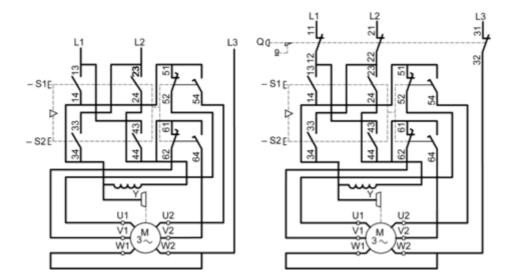


Control of Single-Speed Reversing Motor 3-Phase switching, Reversing by 2-Phase Inversion

With XESD2201 contact block, to be ordered separately

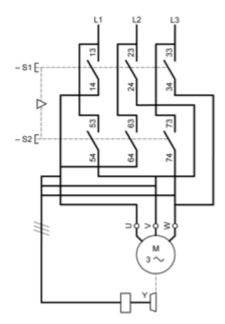

Control of Single-Speed Reversing Motor 3-Phase switching, Reversing by 2-Phase Inversion

With XESD2241 contact block, to be ordered separately

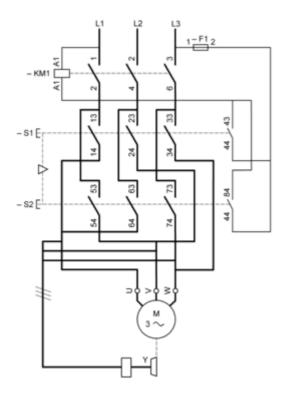

11