

Pendant control station, Harmony XAC, empty, plastic, yellow, 12 cutouts, cable 22...35mm

XACB125

Product availability: Non-Stock - Not normally stocked in distribution facility

Price\*: 752.00 USD

# Main

Range Of Product	Harmony XAC
Product Or Component Type	Pendant control station
Device Short Name	XACB

## Complementary

Control Station Type	Double insulated
Enclosure Material	Glass reinforced polyester
Electrical Circuit Type	Control circuit Power circuit
Enclosure Type	Empty enclosure
Number Of Cut-Out	12 cut-outs in 2 rows
Control Station Colour	Yellow
Cable Entry	Rubber sleeve with stepped entry 0.871.38 in (2235 mm)
Guard Rail	Without
Vertical Operator Cut-Out Centre	1.57 in (40 mm)
Standards	IEC 60947-5-1 CSA C22.2 No 14
Product Certifications	CSA type 4
Protective Treatment	тн
Ambient Air Temperature For Operation	-13158 °F (-2570 °C)
Ambient Air Temperature For Storage	-40158 °F (-4070 °C)
Vibration Resistance	15 gn 10500 Hz)IEC 60068-2-6
Shock Resistance	100 gn IEC 60068-2-27
Overvoltage Category	Class II IEC 61140
Ip Degree Of Protection	IP65 conforming to IEC 60529
Ik Degree Of Protection	IK08 conforming to IEC 62262
Mechanical Durability	1000000 cycles
Net Weight	3.66 lb(US) (1.66 kg)

## Ordering and shipping details

Category US10CS222473

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Discount Schedule	0CS2
Gtin	3389110665635
Returnability	No
Country Of Origin	FR

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.74 in (9.500 cm)
Package 1 Width	25.98 in (66.000 cm)
Package 1 Length	6.30 in (16.000 cm)
Package 1 Weight	3.99 lb(US) (1.810 kg)
Unit Type Of Package 2	P06
Number Of Units In Package 2	15
Package 2 Height	29.53 in (75.000 cm)
Package 2 Width	23.62 in (60.000 cm)
Package 2 Length	31.50 in (80.000 cm)
Package 2 Weight	88.52 lb(US) (40.150 kg)

# **Contractual warranty**

Warranty 18 months

# Sustainability

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >

# Well-being performance


Reach Free Of Svhc					
Toxic Heavy Metal Free					
Mercury Free					
Rohs Exemption Information	Yes				
Reach Regulation	REACh Declaration				
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)				
	EU RoHS Declaration				
China Rohs Regulation	China RoHS declaration				
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.				
California Proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov				

# **XACB125**

### **Dimensions Drawings**

### **Dimensions**

Below drawing shows a product with 12 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

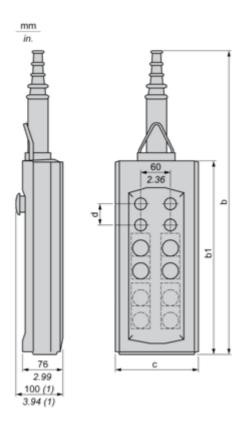


#### Dimensions in mm

Number of cut-outs	2	4	6	8	12
b	409	499	589	679	593
b1	220	310	400	490	404
С	98	98	98	98	158
d	40	40	40	40	40

### Dimensions in in.

Number of cut-outs	2	4	6	8	12
b	16.10	19.64	23.19	26.73	23.35
b1	8.66	12.20	15.75	19.29	15.90
С	3.86	3.86	3.86	3.86	6.22
d	1.57	1.57	1.57	1.57	1.57

Protective cable sleeves




(1) Internal ø

## **XACB125**

# Connections and Schema


# Control of Single-Speed Reversing Motor

With XESD1181 contact block, to be ordered separately



## **Control of 2-Speed Reversing Motor**


With XESD1281 contact block, to be ordered separately

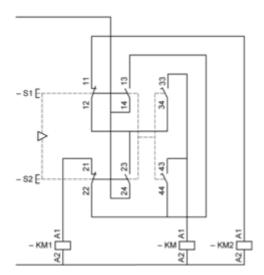


KM High speed contactor

## **Control of Single-Speed Reversing Motor 2-Phase Switching**

With XESD1191 contact block, to be ordered separately

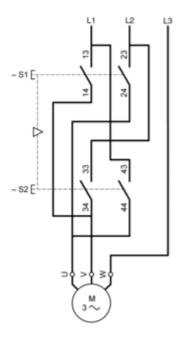


Combined with 3-pole isolating block XACS399 or XACS3991, shown in the unoperated position (pendant station "supplied"), fitted with key release trigger action latching Emergency stop operator.

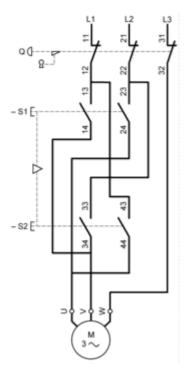

# Control of 2-Speed Reversing Motor 2-Phase Switching


With XESD1291 contact block, to be ordered separately

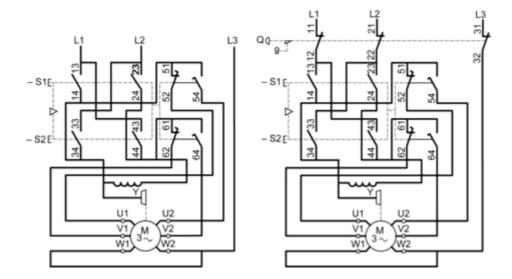

# **XACB125**


Control of Single-Speed Reversing Motor 3-Phase switching, Reversing by 2-Phase Inversion

With XESD2201 contact block, to be ordered separately

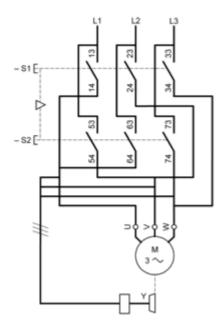

Control of Single-Speed Reversing Motor 3-Phase switching, Reversing by 2-Phase Inversion

With XESD2241 contact block, to be ordered separately

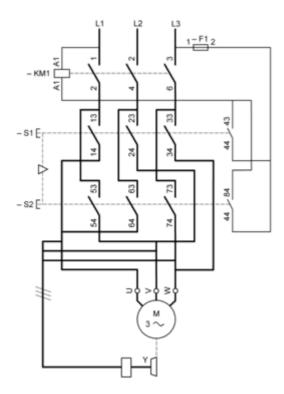

11