Specification





(!) Discontinued

# Emergency switching off pushbutton head ZB4BS54 sold by 100

ZB4BS54TQ

! Discontinued on: Dec 2, 2020

! End-of-service on: Dec 31, 2020

# \_\_\_\_\_

# Main

Range Of Product	Harmony XB4	
Product Or Component Type	ent Type Head for emergency switching off push-button	
Device Short Name	ZB4	
Bezel Material	Chromium plated metal	
Mounting Diameter	0.87 in (22 mm)	
Sale Per Indivisible Quantity	100	
Shape Of Signaling Unit Head	Round	
Type Of Operator	mechanical latching	
Reset	Turn to release	
Operator Profile	Red mushroom Ø 40 mm, unmarked	
Head Type	Standard	

# Complementary

Cad Overall Width	1.57 in (40 mm)	
Cad Overall Height	1.57 in (40 mm)	
Cad Overall Depth	2.24 in (57 mm)	
Net Weight	0.15 lb(US) (0.07 kg)	
Resistance To High Pressure Washer	1015.26 psi (7000000 Pa) 131 °F (55 °C) 0.1 m	
Mechanical Durability	300000 cycles	
Electrical Composition Code	C7 4 single front mounting C8 4 single and double front mounting C11 3 single front mounting C15 1 single front mounting C10 4 single and double front mounting	

# **Environment**

Protective Treatment	тн
Ambient Air Temperature For Storage	-40158 °F (-4070 °C)
Ambient Air Temperature For Operation	-40158 °F (-4070 °C)
Electrical Shock Protection Class	Class I IEC 61140

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

In Danier Of Bushastian	1700 170 0000	
Ip Degree Of Protection	IP66 IEC 60529	
	IP67	
	IP69	
	IP69K	
Nema Degree Of Protection	NEMA 13	
	NEMA 4X	
	NEMA 4	
	NEMA 12	
Ik Degree Of Protection	IK06 conforming to IEC 50102	
Standards	GB 14048.5	
	IEC 60364-5-53	
	JIS C8201-5-1	
	EN/IEC 60947-5-4	
	EN/IEC 60947-1	
	EN/IEC 60947-5-1	
	UL 508	
	CSA C22.2 No 14	
	JIS C8201-1	
Product Certifications	CSA	
	LROS (Lloyds register of shipping)	
	BV	
	GL	
	DNV	
	UL Listed	
Vibration Resistance	5 gn 2500 Hz)IEC 60068-2-6	
Shock Resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27	
	50 gn 11 ms) half sine wave acceleration IEC 60068-2-27	

# Ordering and shipping details

Gtin 3389110876888

# Contractual warranty

Warranty 18 months



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

# Well-being performance

<b>⊘</b>	Reach Free Of Svhc	
<b>⊘</b>	Toxic Heavy Metal Free	
<b>⊘</b>	Mercury Free	
<b>⊘</b>	Rohs Exemption Information	Yes


## **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

# ZB4BS54TQ

# **Dimensions Drawings**

# **Dimensions**

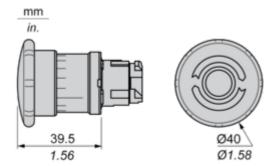

#### Mounting and Clearance

# Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board


Connection by Faston Connectors

Connection by Faston Connectors

- (1) Diameter on finished panel or support
- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm  $_0^{+0.4}$  / 0.88 in.  $_0^{+0.016}$ )
- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

#### Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


#### Panel Cut-outs (Viewed from Installer's Side)

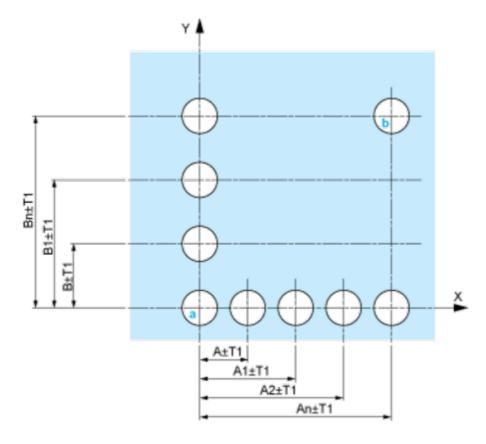


**A:** 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

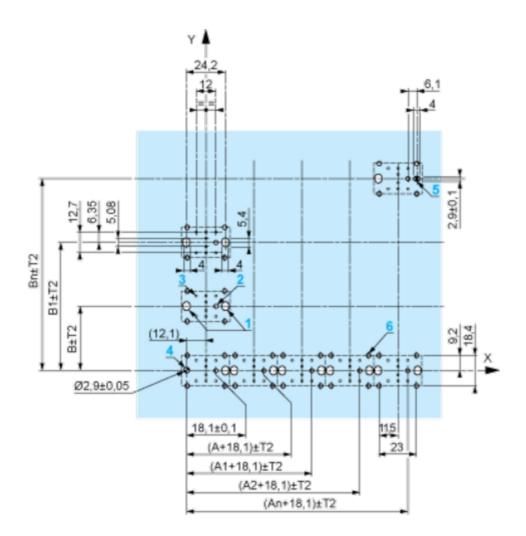

A: 30 mm min.
B: 40 mm min.
Dimensions in in.

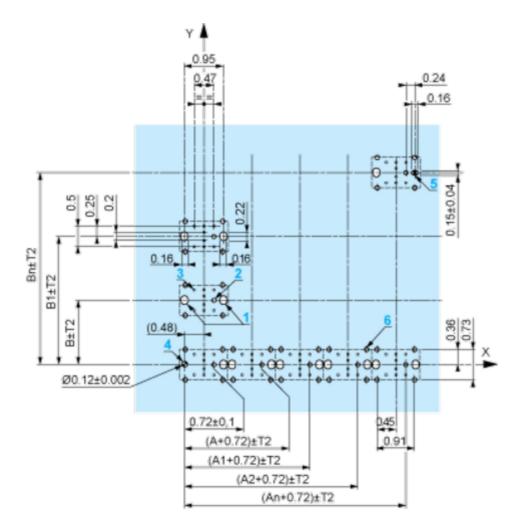

**A:** 1.18 in. min. **B:** 1.57 in. min.


#### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

#### **Installation Precautions**

- $_{\bullet}$  Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2°30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
  - $_{\circ}\;$  every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

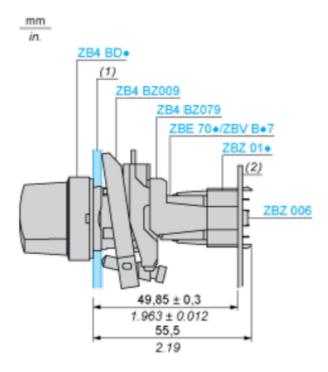

- (1) Panel
- (2) Printed circuit board

#### Mounting of Adapter (Socket) ZBZ 01•


- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the Ø 2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ 01•.


# ZB4BS54TQ

**Technical Description** 

**Electrical Composition Corresponding to Code C7** 



# **Electrical Compositions Corresponding to Code C8**



# **Electrical Compositions Corresponding to Code C10**



# ZB4BS54TQ

**Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1** 



# **Electrical Composition Corresponding to Code C15**

1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C




# Legend

Single contact



Double contact



Light block



Possible location

