Specifications





# Head for pilot light, Harmony XB4, orange, 22mm, with grooved lens, universal LED

ZB4BV053S

Product availability: Stock - Normally stocked in distribution facility

Important message: A change in appearance may be noted on the product but does not affect its use in terms of function and safety. This makes it compatible with our Universal LED blocks

Price\*: 7.60 USD

#### Main

Range Of Product	Harmony XB4
Product Or Component Type	Head for pilot light
Product Compatibility	Universal LED
Device Short Name	ZB4
Bezel Material	Chromium plated metal
Mounting Diameter	0.87 in (22 mm)
Sale Per Indivisible Quantity	1
Head Type	Standard
Shape Of Signaling Unit Head	Round
Cap/Operator Or Lens Colour	Orange
Operator Additional Information	With grooved lens
Environmental Characteristic	High ambient lighting environment

# Complementary

•	
Cad Overall Width	1.14 in (29 mm)
Cad Overall Height	1.14 in (29 mm)
Cad Overall Depth	1.18 in (30 mm)
Net Weight	0.06 lb(US) (0.026 kg)
Resistance To High Pressure Washer	1015.26 psi (7000000 Pa) 131 °F (55 °C) 0.1 m
Electrical Composition Code	P1 front mounting integral LED P2 front mounting integral LED and transformer
Device Presentation	Basic element

#### **Environment**

Protective Treatment	тн
Ambient Air Temperature For Storage	-40158 °F (-4070 °C)
Ambient Air Temperature For Operation	-40158 °F (-4070 °C)
Overvoltage Category	Class I IEC 60536

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ip Degree Of Protection	IP66 IEC 60529 IP67	
	IP69 IP69K	
Nema Degree Of Protection	NEMA 13	
	NEMA 4X	
Ik Degree Of Protection	IK06 conforming to IEC 50102	
Standards	IEC 60947-5-1	
	CSA C22.2 No 14	
	JIS C8201-5-1	
	IEC 60947-5-5	
	IEC 60947-1	
	IEC 60947-5-4	
	UL 508	
	JIS C8201-1	
Vibration Resistance	5 gn 2500 Hz)IEC 60068-2-6	
Shock Resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27	
	50 gn 11 ms) half sine wave acceleration IEC 60068-2-27	

# Ordering and shipping details

Category	US10CS222468
Discount Schedule	0CS2
Gtin	3389110290844
Returnability	Yes
Country Of Origin	FR

# **Packing Units**

PCE
1
1.10 in (2.8 cm)
1.50 in (3.8 cm)
1.89 in (4.8 cm)
0.92 oz (26.0 g)
BB1
5
1.73 in (4.4 cm)
1.34 in (3.4 cm)
10.43 in (26.5 cm)
4.80 oz (136.0 g)
S02
50
5.91 in (15.0 cm)
11.81 in (30.0 cm)
15.75 in (40.0 cm)
3.75 lb(US) (1.703 kg)

# **Contractual warranty**

Warranty

Apr 19, 2024

18 months



**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Well-being performance

<b>⊘</b>	Reach Free Of Svhc	
<b>⊘</b>	Toxic Heavy Metal Free	
<b>⊘</b>	Mercury Free	
<b>⊘</b>	Rohs Exemption Information	Yes


#### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

# **ZB4BV053S**

**Dimensions Drawings** 

## **Dimensions**



#### **ZB4BV053S**


#### Mounting and Clearance

#### Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

**Connectors or on Printed Circuit Board** (1)(2)

Connection by Screw Clamp Terminals or Plug-in

**Connection by Faston Connectors** 

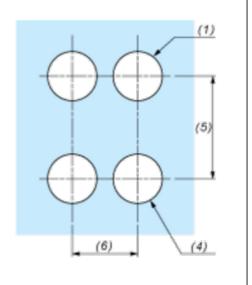

(1) Diameter on finished panel or support

(3)


- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm  $_0^{+0.4}$  / 0.88 in.  $_0^{+0.016}$ )

(4)

- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

## Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

#### Panel Cut-outs (Viewed from Installer's Side)

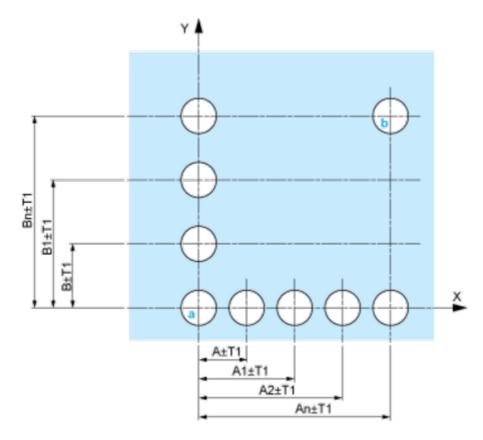


**A:** 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

#### Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm


# **ZB4BV053S**

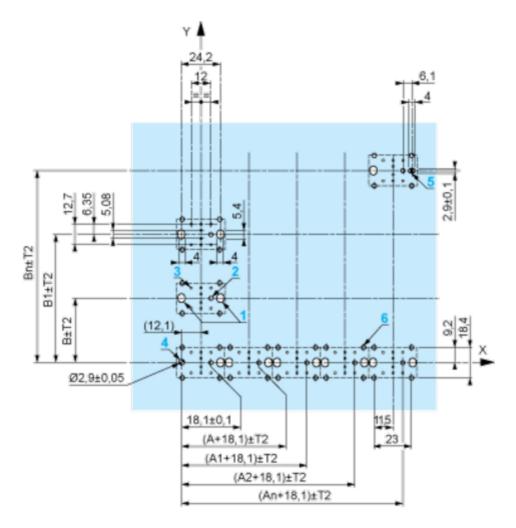

**A:** 30 mm min. **B:** 40 mm min.

**B**: 40 mm min. Dimensions in in.

#### **ZB4BV053S**

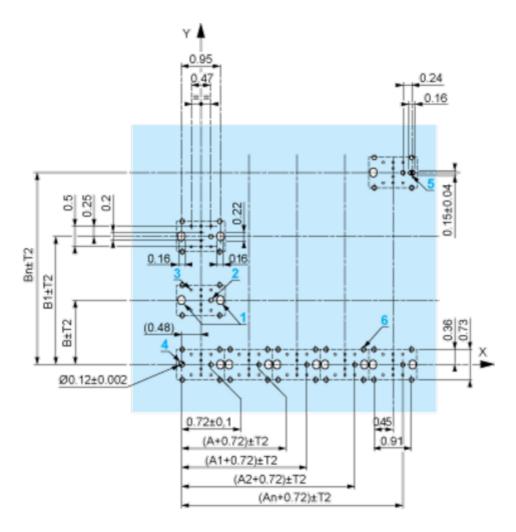

**A:** 1.18 in. min. **B:** 1.57 in. min.

#### General Tolerances of the Panel and Printed Circuit Board


The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

#### **Installation Precautions**

- $_{\bullet}$  Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2°30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
  - $_{\circ}\;$  every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

#### **ZB4BV053S**

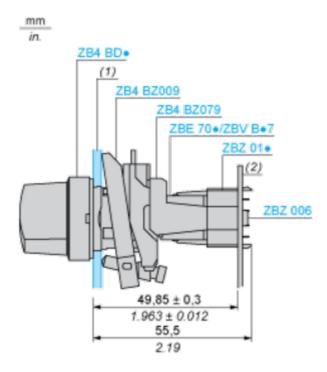

(1) Panel

10

(2) Printed circuit board

#### Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the Ø 2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ 01•.

# **ZB4BV053S**

**Technical Description** 

Electrical Composition Corresponding to Codes P1, P3, PF1, PR1 and PF2

Light block



## **Electrical Composition Corresponding to Codes M6 and P2**




## Legend

Single contact



Double contact



Light block



Possible location

