Specifications





multifunction relay, Harmony Timer Relays, 8A, 2CO, 0.1s…100h, symmetrical flashing, 12..240V AC DC

RE22R2MMW

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 73.54 USD

Main

Range Of Product	Harmony Timer Relays
Product Or Component Type	Multifunction relay
Discrete Output Type	Relay
Device Short Name	RE22
Nominal Output Current	8 A

Complementary

· · · · · · · · · · · · · · · · · · ·	
Contacts Type And Composition	1 C/O timed contact 1 C/O timed or instantaneous contact
Time Delay Type	Power on-delay On-delay and off-delay Interval Off-delay Symmetrical flashing
Time Delay Range	0.11 s 660 s 110 h 110 min 110 s 10100 h 660 min
Control Type	Rotary knob front panel
[Us] Rated Supply Voltage	12240 V AC/DC
Voltage Range	0.851.1 Us
Supply Frequency	5060 Hz +/- 5 %
Connections - Terminals	Screw terminals, 2 x 1.5 mm ² with cable end Screw terminals, 2 x 2.5 mm ² without cable end
Tightening Torque	5.318.85 lbf.in (0.61 N.m) IEC 60947-1
Housing Material	Self-extinguishing
Repeat Accuracy	+/- 0.5 % IEC 61812-1
Temperature Drift	+/- 0.05 %/°C
Voltage Drift	+/- 0.2 %/V
Setting Accuracy Of Time Delay	+/- 10 % of full scale 25 °C IEC 61812-1
Control Signal Pulse Width	30 ms 100 ms under load

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Environment

Dielectric Strength	2.5 kV 1 mA/1 minute 50 Hz IEC 61812-1
Standards	IEC 61812-1 IEC 6100-6-2 IEC 61000-6-1 IEC 61000-6-4 IEC 61000-6-3
Directives	2004/108/EC - electromagnetic compatibility 2006/95/EC - low voltage directive
Product Certifications	CSA CE cULus GL RCM CCC EAC
Ambient Air Temperature For Operation	-4140 °F (-2060 °C)
Ambient Air Temperature For Storage	-22140 °F (-3060 °C)
Ip Degree Of Protection	IP40 housing: conforming to IEC 60529 IP20 terminal block: conforming to IEC 60529 IP40 front face: conforming to IEC 60529
Vibration Resistance	20 m/s² 10150 Hz)IEC 60068-2-6
Shock Resistance	15 gn 11 ms IEC 60068-2-27
Relative Humidity	93 %, without condensation IEC 60068-2-30

Electromagnetic Compatibility	Electrostatic discharge immunity test - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2
	Electrostatic discharge immunity test - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2
	Fast transients immunity test - test level: 1 kV level 3 (capacitive connecting clip) conforming to IEC 61000-4-4
	Fast transients immunity test - test level: 2 kV level 3 (direct contact) conforming to IEC 61000-4-4
	Surge immunity test - test level: 1 kV level 3 (differential mode) conforming to IEC 61000-4-5
	Surge immunity test - test level: 2 kV level 3 (common mode) conforming to IEC 61000-4-5
	Radiated radio-frequency electromagnetic field immunity test - test level: 10 V level 3 (0.1580 MHz) conforming to IEC 61000-4-6
	Electromagnetic field immunity test - test level: 10 V/m level 3 (80 MHz1 GHz) conforming to IEC 61000-4-3
	Immunity to microbreaks and voltage drops - test level: 30 % (500 ms) conforming to IEC 61000-4-11
	Immunity to microbreaks and voltage drops - test level: 100 % (20 ms) conforming to IEC 61000-4-11

Conducted and radiated emissions class B conforming to EN 55022

Ordering and shipping details

Category	US10CP222376
Discount Schedule	0CP2
Gtin	3606480676574
Returnability	No
Country Of Origin	ID

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	0.98 in (2.500 cm)
Package 1 Width	3.27 in (8.300 cm)
Package 1 Length	3.78 in (9.600 cm)
Package 1 Weight	3.77 oz (107.000 g)
Unit Type Of Package 2	S02
Number Of Units In Package 2	40
Package 2 Height	5.91 in (15.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	10.58 lb(US) (4.800 kg)

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance




Rohs Exemption Information
Yes


Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings


Dimensions

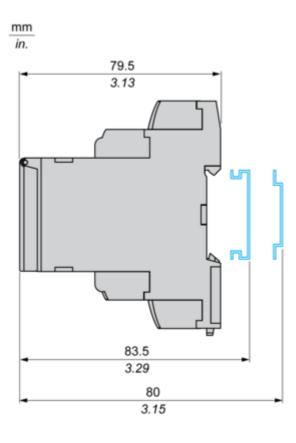

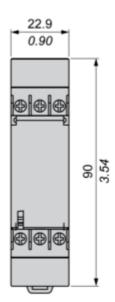


Connections and Schema

Internal Wiring Diagram



Wiring Diagram




Technical Description

Function A : Power on Delay Relay

Description

The timing period T begins on energization. After timing, the output(s) relay close(s).

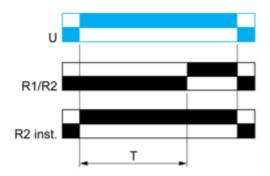


Function Ac : On- and Off-Delay Relay with Control Signal

Description

After power-up, closing of the control contact Y1 causes the timing period T to start (timing can be interrupted by operating the Gate control contact G). At the end of this timing period, the relay closes.

When control contact Y1 re-opens, the timing T starts. At the end of this timing period T

At the end of this timing period T, the output reverts to its initial position (timing can be interrupted by operating the Gate control contact G).

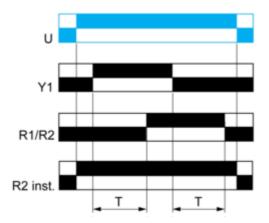


RE22R2MMW

Function At : Power on Delay Relay (Summation) with Control Signal

Description

After power-up, the first opening of control contact Y1 starts the timing. Timing can be interrupted each time control contact closes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output relay closes.

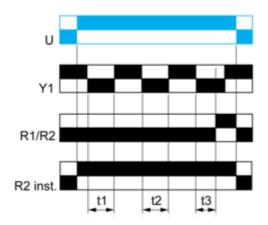


T = t1+t2+t3

Function B : Interval Relay with Control Signal

Description


After power-up, pulsing or maintaining control contact Y1 starts the timing T. The output relay closes for the duration of the timing period T then reverts to its initial state.

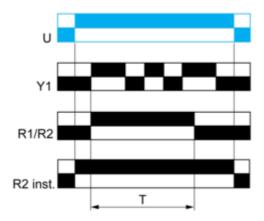

Function Bw : Double Interval Relay with Control Signal

Description


On closing and opening of control contact Y1, the output relay closes for the duration of the timing period T.

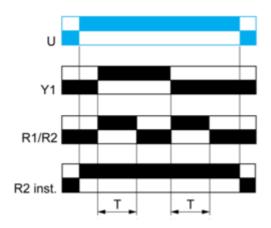

Function C : Off-Delay Relay with Control Signal

Description


After power-up and closing of the control contact Y1, the output relay closes. When control contact Y1 re-opens, timing T starts. At the end of the timing period, the output(s) relay revert(s) to its/their initial state.

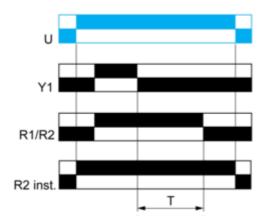

Function D : Symmetrical Flasher Relay (Starting Pulse Off)

Description

Repetitive cycle with two timing periods T of equal duration, with output(s) relay changing state at the end of each timing period T.

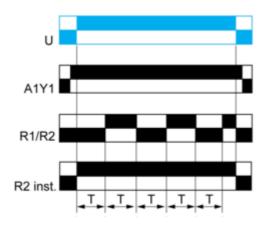


Before power-up Y1 should be permanently connected to A1. 2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Function D : Symmetrical Flasher Relay (Starting Pulse On)

Description


Repetitive cycle with two timing periods T of equal duration, with output(s) relay changing state at the end of each timing period T.

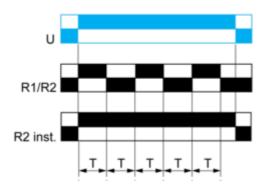

Function H : Interval Relay

Description

On energization of the relay, timing period T starts and the output(s) relay close(s). At the end of the timing period T, the output(s) relay revert(s) to its/their initial state

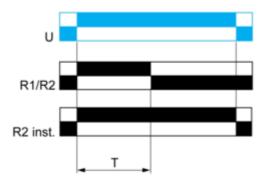

Legend		
	Relay de-energised	
	Relay energised	
	Output open	
	Output closed	
Y1 :	Control contact	
R1/R2 :	2 timed outputs	
R2 inst. :	The second output is instantaneous if the right position is selected	
Т:	Timing period	
U :	Supply	

Function Ht: Interval Relay & With Pause / Summation Control

Description

On energisation of power supply, output(s) R close(s) and timing period T starts.


The timing can be interrupted / paused each time X1 energizes.

When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state Reenergization of X1 will also cause output(s) R close(s) if the time has elapsed and restart the same operation as described at the beginning.

Except for RE17*, RE22R2MMW, RENF22R2MMW, RE22R2MMU and RE22R2MJU, timing can be interrupted / paused each time Y1 energizes.


The second output (R2) can be either timed (when set to "TIMED" or instantaneous (when set to "INST").

Function: 1 Output






Function: 2 Outputs




T = t1 + t2 + ...

Function: 1 Output with Retrigger / Restart Control





Function: 2 Outputs with Retrigger / Restart Control



T = t1 + t2 +...