Specifications





plug-in relay, Harmony electromechanical relays, 15A, 4CO, with LED, lockable test button, 24V AC

RPM42B7

Product availability: Stock - Normally stocked in distribution facility

Price*: 13.30 USD

Main

Range Of Product	Harmony Electromechanical Relays	
Series Name	Power	
Product Or Component Type	Plug-in relay	
Device Short Name	RPM	
Contacts Type And Composition	4 C/O	
[Uc] Control Circuit Voltage	24 V AC 50/60 Hz	
[Ithe] Conventional Enclosed Thermal Current	15 A -40131 °F (-4055 °C)	
Status Led	With	
Control Type	Lockable test button	
Utilisation Coefficient	20 %	

Complementary

IEC
CSA
UL
.2/50 μs
277 V AC) UL
28 V DC) UL
250 V AC) NO IEC
8 V DC) NO IEC
250 V AC) NC IEC
28 V DC) NC IEC
IEC
250 V AC
28 V DC
/A
1
W 10 mA, 17 V
00 cycles/hour under load
000 cycles/hour no-load
000 cycles

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Electrical Durability	100000 cycles resistive	
Average Coil Consumption In Va	2.5 60 Hz	
Drop-Out Voltage Threshold	>= 0.15 Uc AC	
Operate Time	20 ms at nominal voltage	
Release Time	20 ms at nominal voltage	
Average Coil Resistance	80 Ohm at 68 °F (20 °C) +/- 15 %	
Rated Operational Voltage Limits	19.226.4 V AC	
Protection Category	RTI	
Test Levels	Level A group mounting	
Operating Position	Any position	
Pollution Degree	3	
Safety Reliability Data	B10d = 100000	
Net Weight	0.16 lb(US) (0.071 kg)	
Device Presentation	Complete product	

Environment

Dielectric Strength	1500 V AC between contacts with micro disconnection 2000 V AC between coil and contact with reinforced 2000 V AC between poles with basic
Standards	IEC 61810-1 CSA C22.2 No 14 UL 508
Product Certifications	CSA EAC UL
Ambient Air Temperature For Storage	-40185 °F (-4085 °C)
Ambient Air Temperature For Operation	-40131 °F (-4055 °C)
Vibration Resistance	3 gn +/- 1 mm 10150 Hz)5 cycles in operation 5 gn +/- 1 mm 10150 Hz)5 cycles not operating
Degree Of Protection (Housing Only)	IP40 conforming to IEC 60529
Shock Resistance	15 gnin operation 30 gnnot operating

Ordering and shipping details

Category	US10CP221127	
Discount Schedule	0CP2	
Gtin	3389119402200	
Returnability	Yes	
Country Of Origin	US	

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	0.98 in (2.500 cm)
Package 1 Width	1.57 in (4.000 cm)

Package 1 Length	1.77 in (4.500 cm)	
Package 1 Weight	2.50 oz (71.000 g)	
Unit Type Of Package 2	BB1	
Number Of Units In Package 2	10	
Package 2 Height	1.18 in (3.000 cm)	
Package 2 Width	3.94 in (10.000 cm)	
Package 2 Length	8.86 in (22.500 cm)	
Package 2 Weight	26.70 oz (757.000 g)	
Unit Type Of Package 3	S02	
Number Of Units In Package 3	120	
Package 3 Height	5.91 in (15.000 cm)	
Package 3 Width	11.81 in (30.000 cm)	
Package 3 Length	15.75 in (40.000 cm)	
Package 3 Weight	20.56 lb(US) (9.328 kg)	

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Reach Free Of Svhc


Rohs Exemption Information Yes

Certifications & Standards


Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	No need of specific recycling operations
California Proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Dimensions

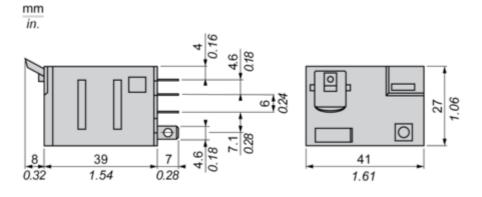


Pin Side View



Connections and Schema

Wiring Diagram




Symbols shown in blue correspond to Nema marking.

Performance Curves

Electrical Durability of Contacts


Durability (inductive load) = durability (resistive load) x reduction coefficient. Resistive AC load



X Switching capacity (kVA)


Y Durability (Number of operating cycles)

Reduction coefficient for inductive AC load (depending on power factor $\cos \phi$)



Y Reduction coefficient (A)

Maximum switching capacity on resistive DC load



X Voltage DC

Y Current DC

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.