Product data sheet

Specification





Head for illuminated push button, Harmony XB4, metal, blue mushroom 40mm, 22mm, universal LED, spring return

ZB4BW463

Product availability: Non-Stock - Not normally stocked in distribution facility

Important message: Viktig information: en förändring i utseendet kan observeras på produkten, men detta påverkar inte dess användning i termer av funktion och säkerhet. Detta gör den kompatibel med våra Universal LED-block

Price*: 28.40 USD

Main

| Range Of Product | Harmony XB4 | |
|-------------------------------|----------------------------------|--|
| Product Or Component Type | Head for illuminated push-button | |
| Device Short Name | ZB4 | |
| Product Compatibility | Universal LED | |
| Bezel Material | Chromium plated metal | |
| Head Type | Standard | |
| Mounting Diameter | 0.89 in (22.5 mm) | |
| Sale Per Indivisible Quantity | 1 | |
| Shape Of Signaling Unit Head | Round | |
| Type Of Operator | spring return | |
| Operator Profile | Blue mushroom Ø 40 mm, unmarked | |
| Cap/Operator Or Lens Colour | Blue | |

Complementary

| Cad Overall Width | 1.57 in (40 mm) |
|---------------------------------------|---|
| Cad Overall Height | 1.57 in (40 mm) |
| Cad Overall Depth | 2.09 in (53 mm) |
| Net Weight | 0.11 lb(US) (0.051 kg) |
| Resistance To High Pressure Washer | 1015.26 psi (7000000 Pa) 131 °F (55 °C) 0.1 m |
| Mechanical Durability | 10000000 cycles |
| Electrical Composition Code | M1 6 single front mounting integral LED M2 6 single and double front mounting integral LED M6 2 single front mounting integral LED and transformer M10 2 single front mounting integral LED |
| Device Presentation | Basic sub-assemblies |

Environment

Protective Treatment TH

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| Ambient Air Temperature For | -40158 °F (-4070 °C) | |
|---------------------------------------|---|--|
| Storage | | |
| Ambient Air Temperature For Operation | -40158 °F (-4070 °C) | |
| Overvoltage Category | Class I IEC 60536 | |
| Ip Degree Of Protection | IP66 IEC 60529 | |
| | IP67 | |
| | IP69 | |
| | IP69K | |
| Nema Degree Of Protection | NEMA 13 | |
| | NEMA 4X | |
| Ik Degree Of Protection | IK05 conforming to IEC 62262 | |
| Standards | UL 508 | |
| | IEC 60947-5-5 | |
| | IEC 60947-5-1 | |
| | CSA C22.2 No 14 | |
| | JIS C8201-5-1 | |
| | IEC 60947-1 | |
| | IEC 60947-5-4 | |
| | JIS C8201-1 | |
| Product Certifications | UL Listed | |
| | GL | |
| | LROS (Lloyds register of shipping) | |
| | CSA | |
| | BV | |
| | DNV | |
| Vibration Resistance | 5 gn 2500 Hz)IEC 60068-2-6 | |
| Shock Resistance | 30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 | |
| | 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27 | |

Ordering and shipping details

| Category | US10CS222468 |
|-------------------|---------------|
| Discount Schedule | 0CS2 |
| Gtin | 3389110666519 |
| Returnability | No |
| Country Of Origin | FR |

Packing Units

| Unit Type Of Package 1 | PCE |
|------------------------------|------------------------|
| Number Of Units In Package 1 | 1 |
| Package 1 Height | 1.73 in (4.4 cm) |
| Package 1 Width | 2.13 in (5.4 cm) |
| Package 1 Length | 3.66 in (9.3 cm) |
| Package 1 Weight | 2.19 oz (62.0 g) |
| Unit Type Of Package 2 | S02 |
| Number Of Units In Package 2 | 40 |
| Package 2 Height | 5.91 in (15.0 cm) |
| Package 2 Width | 11.81 in (30.0 cm) |
| Package 2 Length | 15.75 in (40.0 cm) |
| Package 2 Weight | 6.33 lb(US) (2.871 kg) |

Contractual warranty

Warranty

Apr 19, 2024

18 months



Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

| ⊘ | Reach Free Of Svhc | |
|----------|----------------------------|-----|
| ⊘ | Toxic Heavy Metal Free | |
| ⊘ | Mercury Free | |
| ⊘ | Rohs Exemption Information | Yes |

Certifications & Standards


| Reach Regulation | REACh Declaration |
|--------------------------|---|
| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| China Rohs Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End of Life Information |

Product data sheet

ZB4BW463

Dimensions Drawings

Dimensions

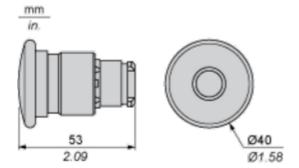

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connectors or on Printed Circuit Board

(1)

(2)

Connection by Screw Clamp Terminals or Plug-in

Connection by Faston Connectors

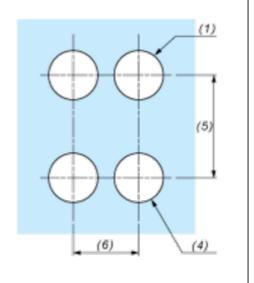

(1) Diameter on finished panel or support

(3)


- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $_0^{+0.4}$ / 0.88 in. $_0^{+0.016}$)

(4)

- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer's Side)

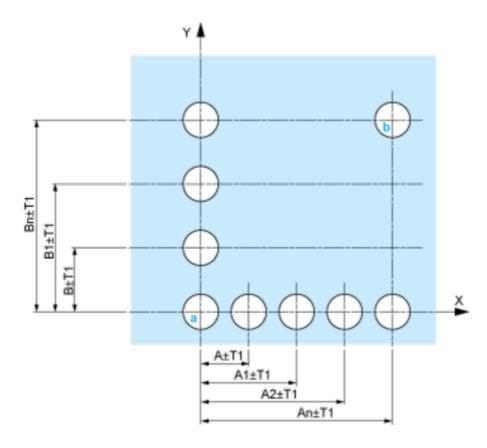


A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)


Dimensions in mm

ZB4BW463

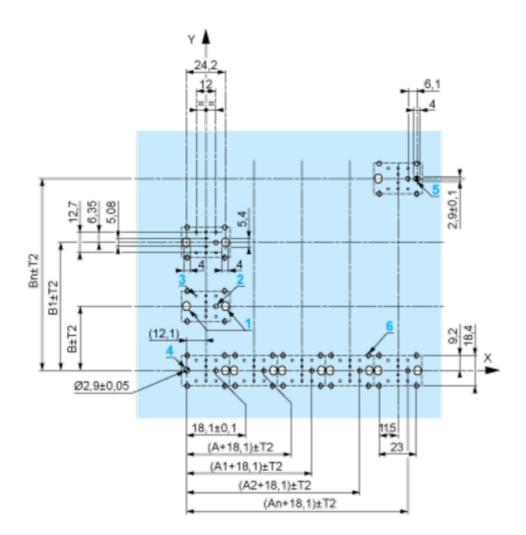

A: 30 mm min. B: 40 mm min. Dimensions in in.

ZB4BW463

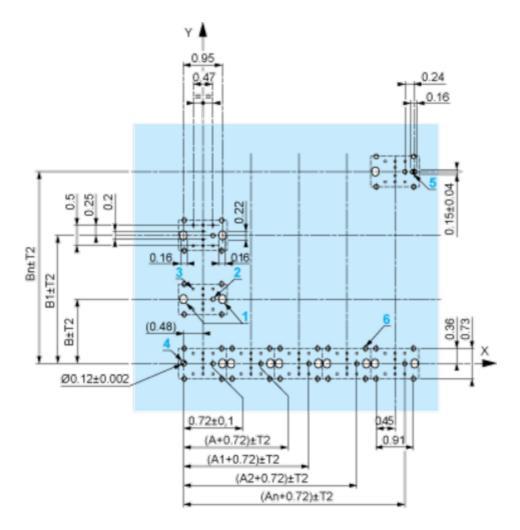

A: 1.18 in. min. **B:** 1.57 in. min.

Apr 19, 2024

General Tolerances of the Panel and Printed Circuit Board


The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

Installation Precautions

- $_{\bullet}$ Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2°30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}\;$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

ZB4BW463

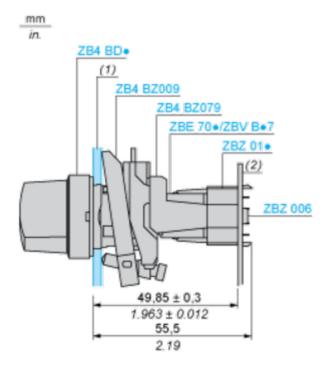

(1) Panel

10

(2) Printed circuit board

Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•


Dimensions An + 18.1 relate to the Ø 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ 01•.

Product data sheet


ZB4BW463

Technical Description

Electrical Composition Corresponding to Codes M1 and M7



Electrical Composition Corresponding to Codes M2 and M8



Electrical Composition Corresponding to Codes M6 and P2



Electrical Composition Corresponding to Codes M5, M10, MF1, MR1 and MF2



Legend

Single contact



Double contact



Light block



Possible location

